

# Products and systems for the connection of electrical panels

2011-2012 Edition



UNI EN-ISO 9001



UNI EN-ISO 14001

**WARNING** The technical data contained in this catalogue is not binding for Cabur and may be modified without prior warning, simply for reasons of production or improvement and evolution. For this reason, please contact our technical-commercial offices for any relevant confirmation or updates. For more information about our new products, please visit our website: [www.cabur.eu/news](http://www.cabur.eu/news)



Catalogue printed on FSC certified, ecological glossy paper.

FSC (Forest Stewardship Council) is an international non-profit organization devoted to encouraging the responsible management of the world's forests through an environmentally friendly and economically sustainable policy.

**DOGMA**

Design, layout, illustrations and printing: Dogma Srl - Savona, Italy

## Introduction

Iconographic index . . . . .	page A4
Cabur . . . . .	page A9
Product range . . . . .	page A10
Web site . . . . .	page A11
Quality and environment . . . . .	page A12
Standards and Directives . . . . .	page A13
ATEX and IEC Ex prescriptions . . . . .	page A14

## Screw-clamp terminal blocks - polyamide

Feed-through and power terminal blocks . . . . .	pages 2-22
Earth terminal blocks . . . . .	pages 23-25
Two and three level terminal blocks . . . . .	pages 26-31
Fuse-holder terminal blocks . . . . .	pages 32-39
Disconnect terminal blocks . . . . .	pages 40-44
Terminal blocks for test and measurement circuits . . . . .	pages 45-47
Diode-holder terminal blocks . . . . .	pages 48-49
Terminal blocks with electronic components . . . . .	pages 50-53
Terminal blocks with special connections and for connectors . . . . .	pages 54-63
Mini-terminal blocks . . . . .	pages 64-65
Multi-pole composable terminal boards . . . . .	pages 66-68
Neutral disconnect terminal blocks . . . . .	page 69

## Spring-clamp terminal blocks -polyamide

Feed-through terminal blocks . . . . .	pages 71-77
Earth terminal blocks . . . . .	pages 78-81
Two and three level terminal blocks . . . . .	pages 82-85
Disconnect terminal blocks . . . . .	page 86
Fuse-holder terminal blocks . . . . .	pages 87-89
Terminal blocks for connectors . . . . .	pages 90-92
Mini-terminal blocks . . . . .	pages 93-94

## Insulation displacement terminal blocks

Feed-through terminal blocks . . . . .	pages 95-96
--	-------------

## Screw-clamp terminal blocks - melamine

Feed-through and high current terminal blocks . . . . .	pages 98-104
Terminal blocks for test and measurement circuits . . . . .	pages 105-107
Fuse-holder and diode-holder terminal blocks . . . . .	pages 108-111
Terminal blocks for thermocouple circuits . . . . .	page 112
High current terminal blocks . . . . .	pages 113-118

## Control and distribution terminal boards

Terminal boards for metering panels . . . . .	pages 119-125
Distribution terminal boards . . . . .	pages 126-129

## Installation products

Mobile terminal blocks, CONTC series . . . . .	pages 130
Mobile terminal blocks, CONT series . . . . .	pages 131
Terminal boards, CAMUT series . . . . .	pages 132
Copper bar supports . . . . .	pages 133

## Accessories

. . . . .	pages 134-170
-----------	---------------

## Various indexes

Alphabetical index . . . . .	pages 171-177
Index by catalogue number . . . . .	pages 178-184
Rail assembly composition guide . . . . .	page 185


# Iconographic index

## Polyamide screw-clamp terminal blocks


### Feed-through terminal blocks, CBC series



### High current terminal blocks, GPA series

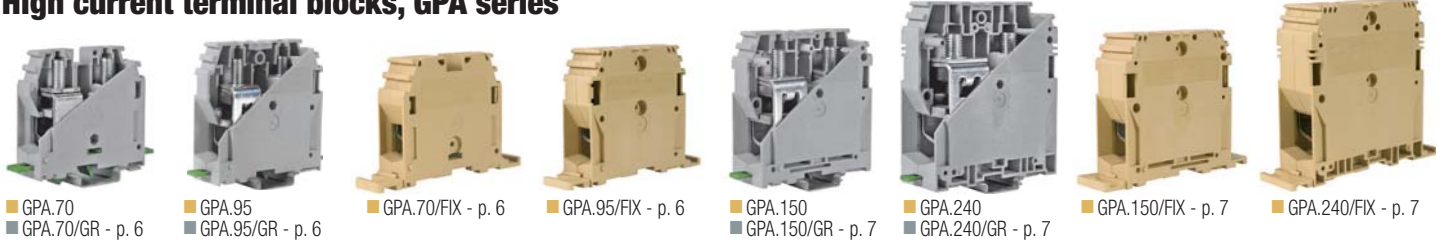


### Earth terminal blocks, TEC series

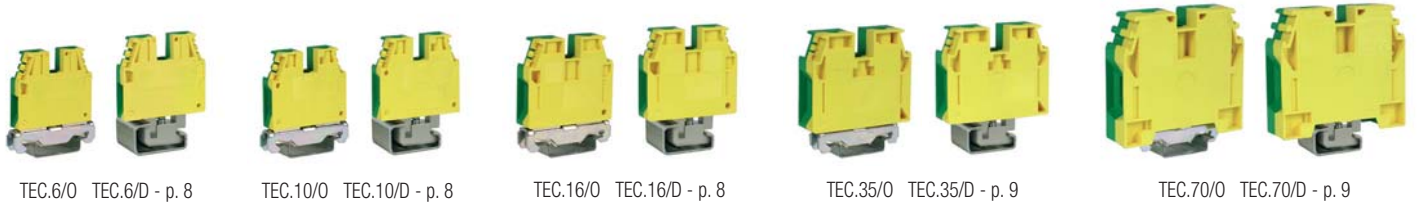

### Feed-through terminal blocks, CBD series




### High current terminal blocks, GPM series

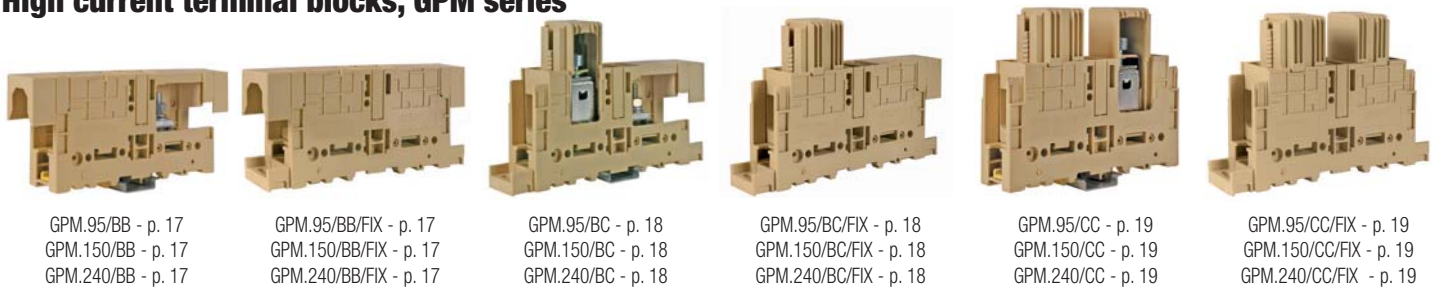


### ACB series




### MBL series

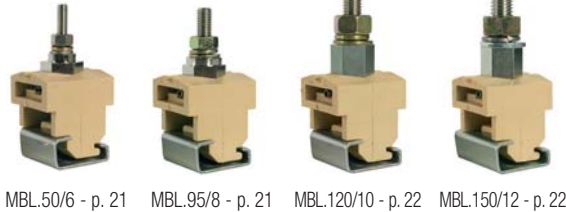


### Earth terminal blocks

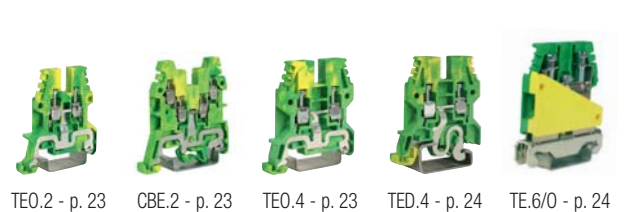


### Earth terminal blocks

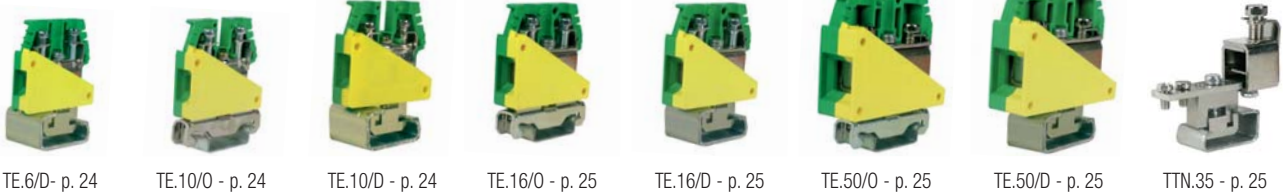


## Two and three-level terminal blocks

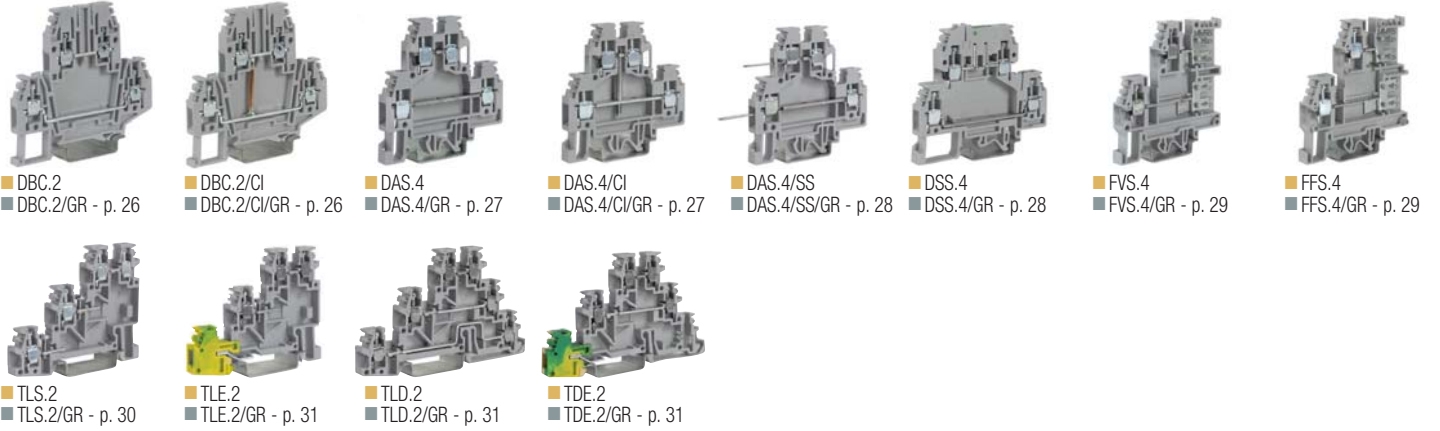


## Fuse-holder terminal blocks

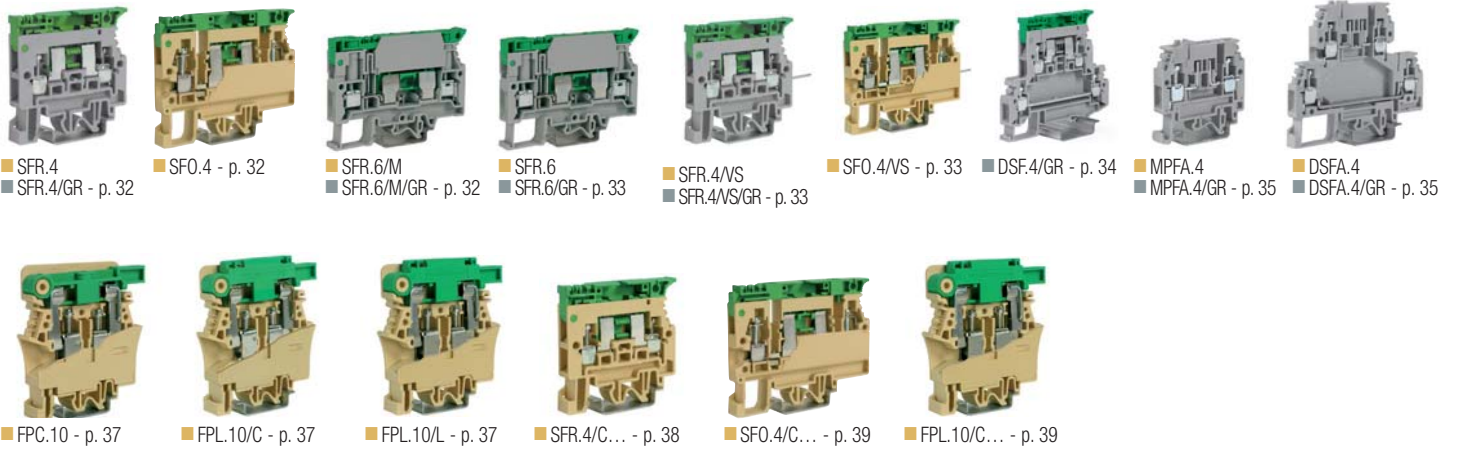

## Disconnect terminal blocks

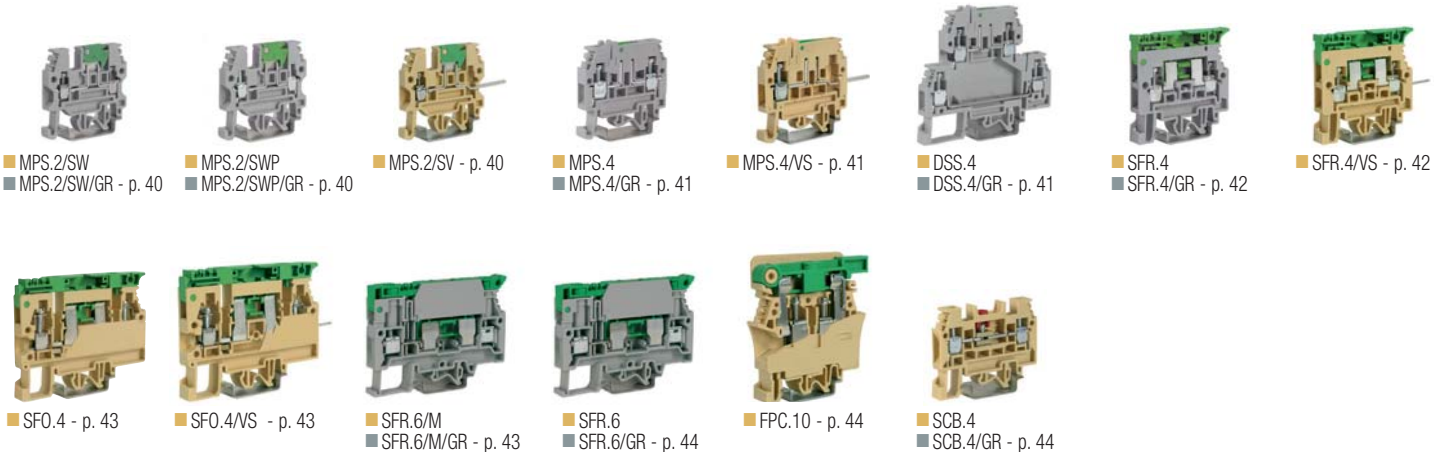

## Terminal blocks for test and measurement circuits

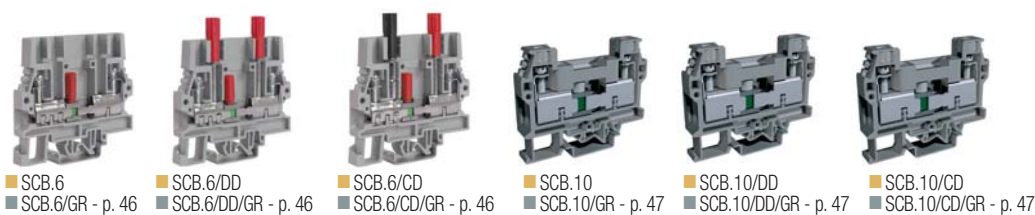


## Diode-holder terminal blocks



# Iconographic index

## Terminal blocks with electronic components

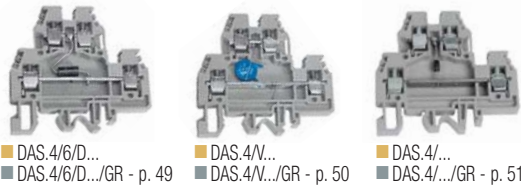


■ DAS.4/6/D...  
■ DAS.4/6/D.../GR - p. 49

■ DAS.4/V...  
■ DAS.4/V.../GR - p. 50

■ DAS.4/...  
■ DAS.4/.../GR - p. 51

## Terminal blocks with special connections and for connectors

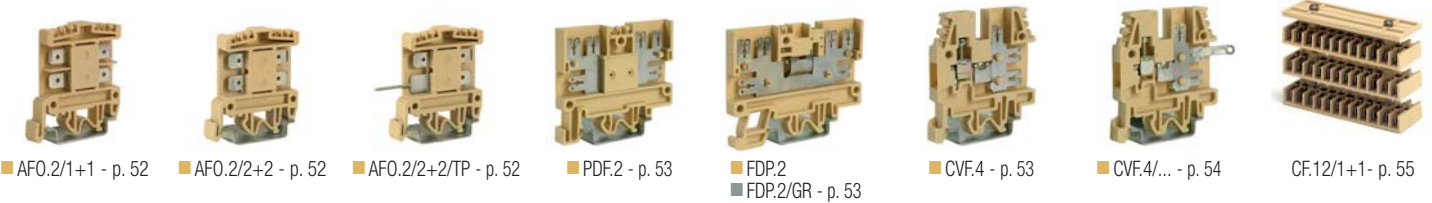

■ AF0.2/1+1 - p. 52

■ AF0.2/2+2 - p. 52

■ AF0.2/2+2/TP - p. 52


■ PDF.2 - p. 53

■ FDP.2  
■ FDP.2/GR - p. 53

■ CVF.4 - p. 53

■ CVF.4/... - p. 54

■ CF.12/1+1 - p. 55

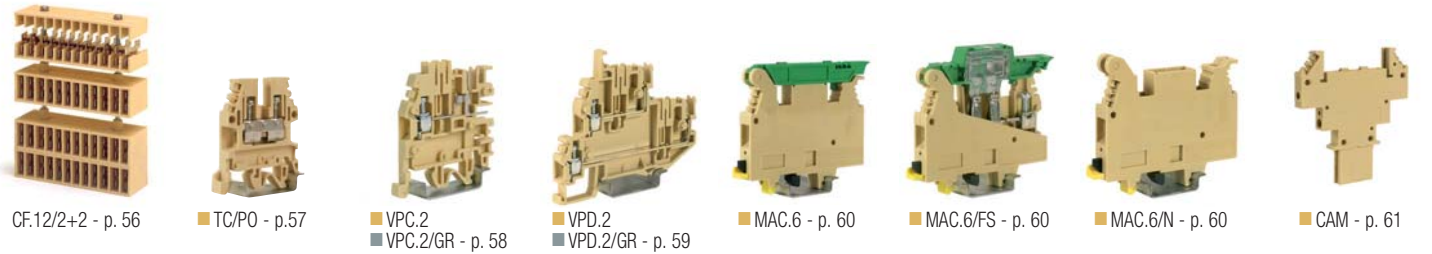

■ CF.12/2+2 - p. 56

■ TC/PO - p. 57

■ VPC.2  
■ VPC.2/GR - p. 58

■ VPD.2  
■ VPD.2/GR - p. 59

■ MAC.6 - p. 60

■ MAC.6/FS - p. 60

■ MAC.6/N - p. 60

■ CAM - p. 61

## Mini terminal blocks



■ RN.1 - p. 62

■ RN.2 - p. 62

■ RP.4 - p. 62

■ RFI.2 - p. 63

■ TR.2 - p. 63

■ TR.4 - p. 63

## Modular multi-pole terminal blocks



■ BPL.4 - p. 65

■ TPL.4 - p. 65

■ BPL/R - p. 65

■ BPL.4/PS - p. 66

■ TPL.4/PS - p. 66

## Neutral disconnect terminal blocks



■ CNT.6 - p. 67

■ CNT.16 - p. 67

■ CNT.35 - p. 67

## Spring-clamp terminal blocks

### Feed-through terminal blocks



■ HMM.1/GR  
p. 70

■ HMM.1/1+2/GR  
p. 70

■ HMM.1/1+2/GR  
p. 70

■ HMM.2/GR  
p. 71

■ HMM.2/1+2/GR  
p. 71

■ HMM.2/2+2/GR  
p. 71

### Disconnect terminal blocks



■ HMM.2/1+2/S/GR  
p. 72

■ HMM.2/2+2/A/GR  
p. 72

■ HMM.2/2+2/S/GR  
p. 72

### Feed-through terminal blocks



■ HMM.4/GR - p. 75

■ HMM.4/1+2/GR - p. 75

■ HMM.4/2+2/GR - p. 75

■ HMM.6/GR - p. 76

■ HMM.10/GR - p. 76

■ HMM.16/GR - p. 76


■ HMR.16(D)/GR - p. 77

### Earth terminal blocks



HTE.1 - p. 78 HTE.1/1+2 - p. 78 HTE.1/2+2 - p. 78 HTE.2 - p. 79 HTE.2/1+2 - p. 79 HTE.2/2+2 - p. 79 HTE.4 - p. 80 HTE.4/1+2 - p. 80 HTE.4/2+2 - p. 80

### Two and three-level terminal blocks

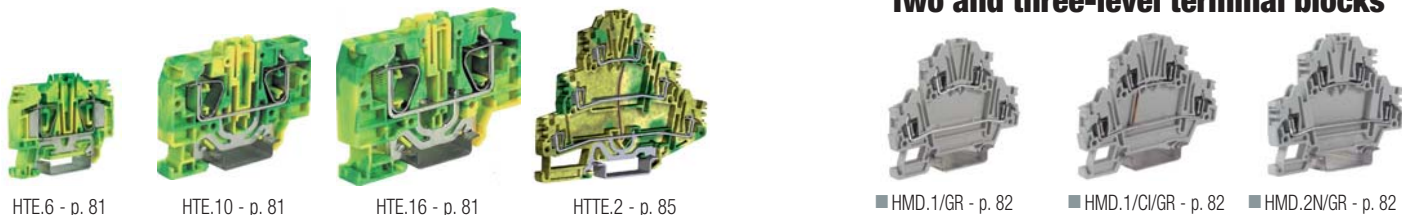

HTE.6 - p. 81 HTE.10 - p. 81 HTE.16 - p. 81 HTTE.2 - p. 85 HMD.1/GR - p. 82 HMD.1/CI/GR - p. 82 HMD.2N/GR - p. 82



HMD.2N/CI/GR - p. 82 HMD.2/GR - p. 82 HMD.1/X/GR - p. 83 HMD.2N/X/GR - p. 83 HMD.2N/X1/GR - p. 84 HLD.2/GR - p. 85 HDE.2/GR - p. 85

### Switchable terminal blocks



HMS.2/GR - p. 86 HSCB.4/GR - p. 86 HSCB.6/GR - p. 86

### Fuse-holder terminal blocks



HMFA.2/GR - p. 87 HMFA.4/GR - p. 88 HMF.4/L.../GR - p. 88 HFR.4/M/GR - p. 89 HFR.4/GR - p. 89

### Terminal blocks for connectors




HCD.1/GR - p. 90 HVPC.2/GR - p. 91 CHP.2(D)/GR - p. 91

### Mini terminal blocks



HVTE.2 - p. 92 CHTE.2(D)/GR - p. 92 HPP.2/GR - p. 93 HP.2/GR - p. 93 HPC.2/GR - p. 94

### Polyamide feed through insulation displacement terminal blocks



NCS - p. 96 NCV - p. 96

### Screw-clamp terminal blocks Melamine insulated



da p. 98 a p. 118



da p. 119 a p. 125

### Distribution terminal boards QBOLK - QPOL



da p. 126 a p. 129

### Mobile terminal boards CONTC - CONT



da pag. 130 a p. 131

### 12-pole terminal boards CAMUT



a pag. 132



• **Terminal blocks for electrical boards**

polyamide screw clamp, spring-clamp terminal blocks, melamine insulated terminal blocks, terminal boards for metering panels, high current terminal blocks, mobile terminal blocks, protected distribution terminal boards, 12-pole polyamide terminal boards

• **Electronic products for electrical boards**

power supplies, analog modules, relay modules, signal converters

• **Connection systems for photovoltaic plants**

connectors, tools, cables, connection systems for photovoltaic equipment, String Boxes, dischargers, diodes, fuse holders

• **Industrial marking systems** 

plotters and printing systems, tags and accessories to identify wires and terminal blocks, tags for contactors and push-buttons, modular strips for distribution panels, panel identification plates



If you wish to receive complete and updated technical documentation on Cabur products, please send a request using the dedicated form that you can download **online sul sito [www.cabur.it](http://www.cabur.it)**  
<http://www.cabur.it/documentazioni>

or just fill in, and send the form below

**PLEASE SEND ME THE COMPREHENSIVE TECHNICAL DOCUMENTATION**

Surname .....; Name .....; Function .....

Company Name .....; Field of activity:  Distributor  Installer  Panel builder  Other

Address .....; Town .....; POSTCODE .....

Telephone .....; Fax .....; E-mail .....

Data supplied shall be kept by Cabur Srl and processed on printed forms, confidentially protected, with the sole purpose to allow Cabur, its agents, retailers and partners to deliver commercial information and services. Data contribution is optional. Nevertheless the non-authorization to data processing implies the impossibility of receiving information and commercial bargains. At any moment you may avail yourselves of the rights as prescribed in the Italian decree 196/2203. In order to ask for a copy of the data supplied, obtain its modification or its cancellation from our archives, or to exercise the rights as per article 7 of above mentioned law decree, you may send a written request to: Cabur Srl - Marketing department - Località Isola Grande, 45 - 17041 Altare (SV, Italy). The holder of data processing is: Cabur Srl, Località Isola Grande 45, Altare (SV), Italy.

I agree to my personal data being processed for the a.m. purposes.  
 Signature .....

**PLEASE PHOTOCOPY AND SEND BY FAX AT +39 019 58 999 280**



Shortly after its foundation, back in 1952, Cabur became a leading manufacturer of electrical panel terminal blocks, by focusing on installers' needs and providing leading edge technical solutions that, in some cases, would become popular in the industry.

In particular, in our product design and manufacturing, we have pioneered a quality focus on raw materials, functionality, reliability over time, and respect for the environment. That is the reason why Cabur was granted Class 1E (Equipment for Nuclear Power Generating Stations) qualification as early as in 1985 and, in addition, the ISO 9001 (Quality) and ISO 14001 (Environment) certifications, as well as Notification of production in compliance with the ATEX Directive and the Certification Scheme IEC Ex for "Ex e" installations on the most important terminal block lines.



UNI EN-ISO 14001



UNI EN-ISO 9001

## The Headoffices

In 2006 a significant growth in company structure urged the organization to move from the historic site in Albissola Marina to a new logistic and manufacturing centre in Altare (SV).



Rather than moving abroad, Cabur has opted to invest in Italy, by acquiring a new state-of-the-art 15,000 sqm production site.

By doubling our production surface and increasing our staff with the recruitment of new people, we have been able to rationalise and make our production processes, logistics, and sales, even more efficient.



Località Isola Grande 45  
17041 Altare (SV)  
ITALY

Tel. +39 019 58999.1  
Fax +39 019 58999280  
e-mail: info@cabur.it

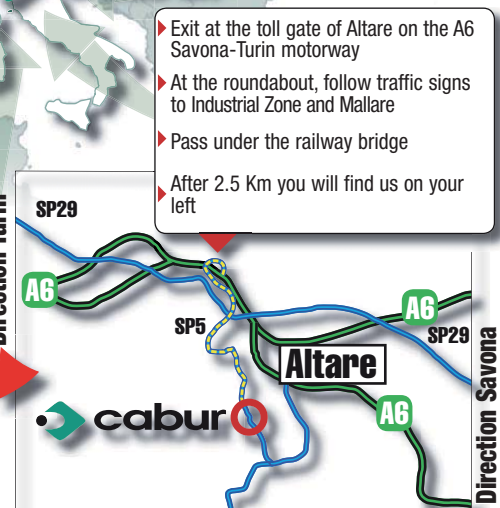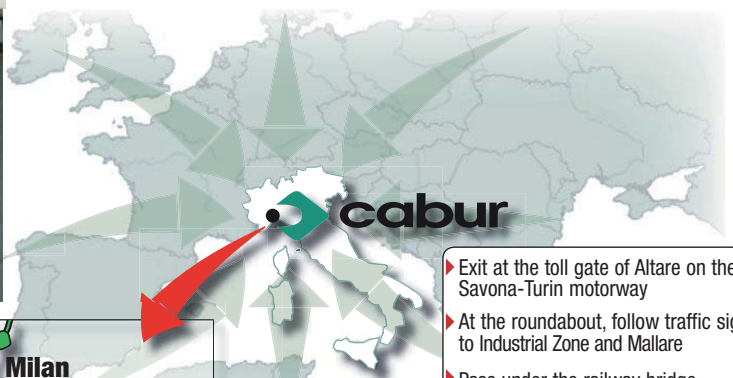

# Product range


With over 50 years of experience, Cabur develops and produces, by its own designs, a wide range of products for the electrical industry, providing the best in working conditions, in terms of operability and reliability.

Current production of:

- Terminal blocks for electrical boards
- Electronic products for electrical boards
- Installation products
- Connection systems for photovoltaic equipments

Fully meets users' varied and complex installation needs.

Our varied and diversified production represents the optimal synthesis of Cabur's long experience as partner of Italy's most important Industries and Research Laboratories, combined with foreign activities and collaboration, always with the aim of pinpointing and meeting users' installation needs.

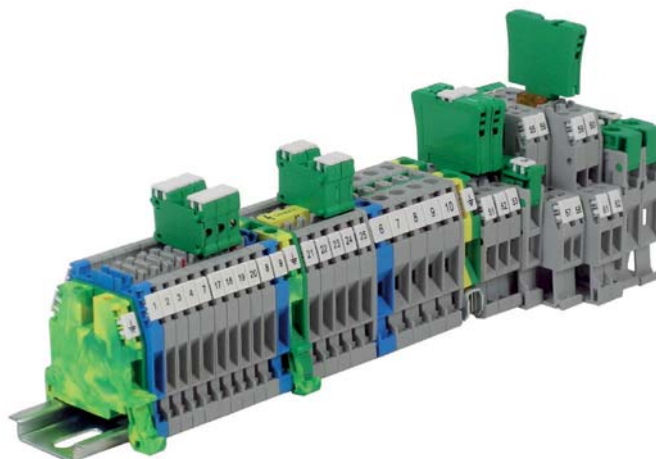


In particular as a result of a specific planning decision, products in our "standard" series are designed to meet the fundamental requirements of the most severe installation conditions and environments, thus avoiding to produce special product series for specific applications. This kind of planning has determined a clear qualitative improvement in the entire production, as well as a more streamlined and simplified product management, first of all to the advantage of the Distribution, which can guarantee to final Clients the most efficient service.

In addition to terminal blocks, Cabur product offering features a full range of electronic products for electric panels for plant and machine automation and process control. These products are designed for an easy deploy and for easy material management, thanks to the use of innovative and leading-edge technology.




The new line of products for professional marking completes the range with innovative printing solutions, tags for wires, terminal blocks and push-buttons, plates, tags and modular strips for distribution panels.

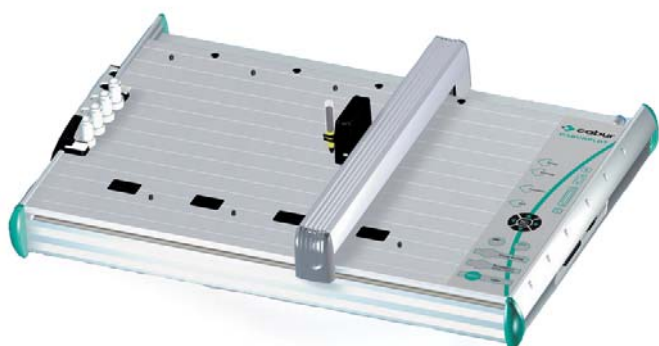

## Highest ...mass produced quality

We guarantee top performance of our contacts and maximum flexibility of connection solutions.

A full range of standard products for automation panels is available at all major Wholesalers. Full support is provided by Cabur sales force both in Italy and in over 30 countries abroad, as well as by our Engineers, in order to provide our clients with the best installation solutions.

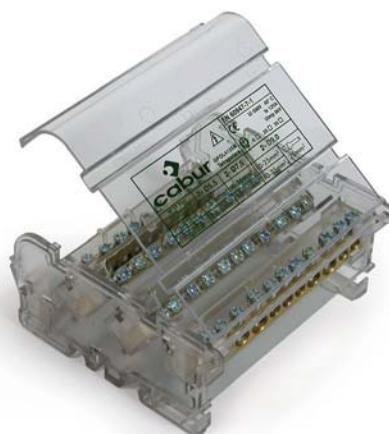

## www.cabur.eu Web Site


On our web site, our customers and industry operators can always get up-to-date information on new products and sales offers. All data sheets of Cabur product range, including those in this Catalogue, are available on our online catalogue featuring advanced user-friendly search functions.

Moreover, on our web site you can:

- ask our specialists for technical information and application advice
- contact our sales staff and ask them for estimates
- download manuals and other technical literature
- get access to quality and compliance certificates
- look at our latest sales literature
- ask for free catalogues and brochures
- ... and much more.

By this newsletter, Cabur communicates also via e-mail its main innovations and commercial activities to all those who apply for it through the registration form.

In conclusion, Cabur web site ([www.cabur.eu](http://www.cabur.eu)) is the ideal tool to get real time information and contacts with our company.

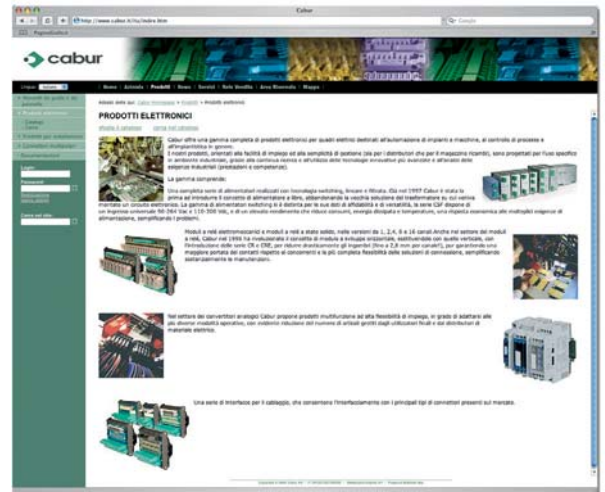

# www.cabur.eu

Real time information on our company,  
products, and certifications

In order to be promptly updated about the availability of new technical and commercial documentation, please register on the site and join the newsletter service.

# Quality and Environment

## ISO 9001 CSQ Certification

Until recently, Cabur "Quality" was simply recognised through the appreciation of its customers. This has allowed the company to become a leader in Italy in the design, production and distribution of "terminal blocks for electrical panels" and, more recently, to extend its products offering to the segment of "electronic products" with recognised reliability levels in both Italian and foreign markets. Obviously, this cannot be the result of improvisation, but of a constant organisation process begun back in 1985 with the definition and implementation of a Quality Assurance Programme based on ANSI N 45.2 (referred to the particularly severe nuclear environment) that has involved the entire structure of the Company and has made each function and worker responsible for quality standards. Since 1995, CSQ (international institute for the certification of business quality systems) has certified the Quality system designed and adopted by Cabur. The Quality system refers to the most complete and severe standard amongst UNI EN ISO 9000 series defining the requirements for Total Quality in Companies, that is ISO 9001, including the activities of Product Design, Development, Manufacturing and Customer Service. After the issue of the new Edition of the Standard (ISO 9001:2008), the whole Quality System has been revised and renewed to be fully compliant with the new regulations. This compliance was confirmed by CSQ with the new Certificate issued in 2009.



UNI EN-ISO 9001



**THE QUALITY OF OUR PRODUCTS IS JUDGED BY OUR CUSTOMERS. OUR QUALITY ASSURANCE SYSTEM IS CERTIFIED BY CSQ.**

## ISO 14001 CSQ Certification

In its continuous improvement process, CABUR has adopted an environmental management system since 2001, obtaining the international CSQ UNI EN 14001 recognition. This goal represents a guarantee given of the respect Cabur has for the surrounding environment as well as a demonstration of the adoption of environmental safeguard rules and, additionally, a pledge for constant ecological improvement. This kind of Certification is still quite uncommon in Italy; Cabur has nevertheless been able to achieve and add it to its corporate philosophy, which is always aimed at the anticipation, rather than to the passive adaptation, of those needs that are becoming more and more urgent and global. Environment is undoubtedly one of these issues and, anticipating many other companies, not only in Italy, Cabur firmly decided to adopt a system that monitors and prevents environmental risk, inherent to every stage of its manufacturing process. Operational procedures and other paper documentation were unified and harmonised with the running Quality Assurance System and the manual, becoming of both Quality and Environmental Management, is now a complete reference point. The Quality Assurance and Environmental Management Department is at your complete disposal to provide any further information and/or clarification on the entire Quality / Environment System and Customer Service. Cabur can provide you with a copy of both CSQ and EQNET certificates, or with a copy of the Quality and Environmental Management manual.



UNI EN-ISO 14001



# Standards and Directives

## The 2002/95/CE Directive



The 2002/95/CE Directive, known as RoHS, sets limits to the use of specific dangerous materials in electric and electronic devices.

The Directive applies exclusively to devices included in the following categories, as listed in attachment 1A of 2002/96/EC Directive, also known as WEEE, excluding categories 8 and 9.

1. Large appliances excluding fixed ones
2. Small appliances
3. IT and telecommunication appliances
4. Consumers' appliances
5. Lighting appliances
6. Electric and electronic tools, excluding large fixed industrial tools
7. Toys and devices for hobbies and sports
10. Vending machines

### Cabur Products' compliance to RoHS Directive

Cabur products are generally deployed in electric panels for electric distribution and for industrial automation, which are excluded from the application field of the RoHS Directive, as components of "fixed industrial tools" and of "fixed installations".

Nevertheless, in consideration of the needs of those Customers deploying Cabur products into devices and appliances that need to be RoHS compliant, we have decided to review our production according to RoHS Directive requirements.

From the beginning of the year we have been disposing of non-compliant items, not only to reduce dangerous substances but to eliminate them completely from components in our production, with a Zero Tolerance mindset.

The small amount of our products which is currently non-RoHS compliant consists of dated stocked parts or of those few items that cannot be produced by different materials or process yet. In any case, as mentioned above, these items are deployed in product categories that are not listed in the RoHS Directive application field.

Our staff is available for further details both on our products and on the application of the RoHS Directive.

For more information, please click on [www.cabur.eu](http://www.cabur.eu)

## CE Marking



All products in this catalogue meet all EU applicable standards when the catalogue was printed. Therefore, all required CE markings are placed on the products and on all product related documents.

Do not hesitate to contact our staff for any further information and/or explanations on Reference Standards. Cabur Customer Service can provide you with certificates of compliance to Reference Standards, type approvals, and CE markings.



## Product Quality Assurance Notification according to ATEX 94/9/EC Directive and the Certification Scheme IEC Ex


The procedure for renewal of the Product Quality Assurance Notification, granted to our Company, in 2001, as a manufacturer of equipment intended for use in potentially explosive atmospheres (increased safety measures) and according to the requirements given by “**ATEX**” Directive 94/9/EC, has been completed with a positive outcome. It was renewed in 2008.

In 2007, activities relating to the part of the System were also judged to be perfectly suitable to meeting the requirements established by Certification Scheme IEC Ex, with the issue by the O.N. of the QAR (Quality Assessment Report) No. IT/CES/QAR07.0004/00, according to Certification Scheme IEC Ex. This recognition is of global importance.

The Product Quality Assurance Notification has been the most demanding stage in the process of Ex e Certificates conversion, which have been issued on the basis of the requirements given by elder European Directives, into updated documents.

The Notification procedure has included a first stage, characterised by the documentation analysis (Quality/Environment Manual + ATEX Quality Plan + Operational procedures), following which a preliminary visit took place (carried out at the Notifying Body premises).

Once the first step was successfully completed, the second (namely the Company Notification) took part and was carried out with the Certification visit.

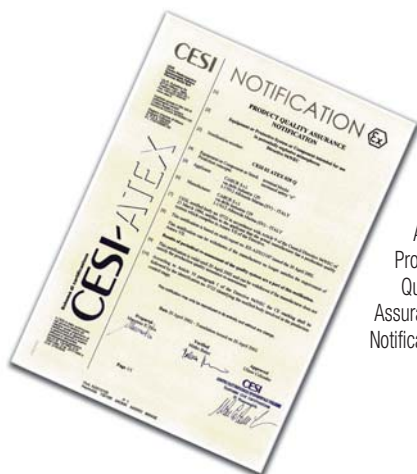

ATEX Product Quality Assurance Notification

The relevant Notification number, granted by the Notifying Body is the following:

**CESI 02 ATEX 028 Q**

Our Quality and Environmental Management System today is consequently perfectly updated in order to fulfil also **ATEX** and **IEC Ex** Directive. As in the occasion of the Environmental Management Certification, the ATEX Notification represents a significant goal achieved in the **continual improvement** path.

## ⊕ Terminal blocks approved in conformity to ATEX 94/9/CE Directive

“increased safety” (**Ex e**) terminal blocks are manufactured according to IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 61241-0 Stds. and bear, on the insulating body, the name of the product and the electrical characteristics.

ATEX Marking:

**0722** ⊕ **I M2 / II 2 G D**

**0722** = number of the Notifying Body (CESI) for the ATEX surveillance

**I M2** = group **I** (mines), category **M2**

**II 2 G D** = group **II** (surface), category **2 G** (gas) **D** (dust)

**Ex e** = type of protection

**V** = rated voltage

The marking **CE** indicates the Conformity to UE 2006/95/CE Directive (Low Voltage).

IEC Ex Marking:

**Ex e** = safer protection mode

**II** = group **II** (surface)

**Terminal blocks must be installed in Ex e enclosures; the enclosure / terminal blocks assembly must be subjected to separate certification.**

The currents allowed for each terminal block, when used in potentially explosive environments (Ex e), are listed in the separated Certificate, granted to the assembly formed by terminal blocks + enclosure.

## Rail assembly composition in potentially explosive (Ex e) environments

Each terminal block can be connected to contiguous elements by means of fixed cross-connections which are made unloosening by means of an elastic washer located under the head of the screw. For fixed cross-connections it is necessary to keep well separated the different phases, by interposing a coloured partition, having a thickness of 1.5 mm, between adjoining cross connections and between cross connections and adjoining terminal blocks.

The multiple cross connection, by means of the commoning bar, can be connected to different terminal blocks, provided that they are adjoining one to another.

# Screw-clamp terminal blocks

## Polyamide insulated

### Feed-through and high-current terminal blocks

CBC series . . . . .	pages 2-4
CBR.2 . . . . .	page 5
GPA series . . . . .	pages 6-7
TEC series . . . . .	pages 8-9
CBD series . . . . .	pages 10-15
GPM series . . . . .	pages 16-19
ACB series . . . . .	page 20
MBL series . . . . .	pages 21-22

### Earth terminal blocks

TEO series . . . . .	page 23
CBE.2 . . . . .	page 23
TED.4 . . . . .	page 24
TE/O - TE/D series . . . . .	pages 24-25
TTN.35 . . . . .	page 25

### Two and three-level terminal blocks

DBC.2 - DBC.2/CI . . . . .	page 26
DAS.4 - DAS.4/CI . . . . .	page 27
DAS.4/SS - DSS.4 . . . . .	page 28
FVS.4 - FFS.4 . . . . .	page 29
TLS.2 . . . . .	page 30
TLE.2 - TLD.2 - TDE.2 . . . . .	page 31

### Fuse-holder terminal blocks

SFR.4 - SFO.4 - SFR.6/M . . . . .	page 32
SFR.6 - SFR.4/VS - SFO.4/VS . . . . .	page 33
DSF.4/GR . . . . .	page 34
MPFA.4 - DSFA.4 . . . . .	page 35
CPF/5 component-holder cartridge . . . . .	page 36
FPC.10 - FPL.10/C - FPL.10/L . . . . .	page 37
SFR.4/C . . . . .	page 38
SFO.4/C . . . . .	page 39

### Disconnect terminal blocks

MPS.2/SW - MPS.2/SWP - MPS.2/SV . . . . .	page 40
MPS.4 - MPS.4/VS - DSS.4 . . . . .	page 41
SFR.4 - SFR.4/VS . . . . .	page 42
SFO.4 - SFO.4/VS - SFR.6/M . . . . .	page 43
SFR.6 - FPC.10 - SCB.4 . . . . .	page 44

### Terminal blocks for test and measurement circuits

Serie SCB.6 . . . . .	page 46
Serie SCB.10 . . . . .	page 47

### Diode-holder terminal blocks

SFR.4 . . . . .	page 48
SFR.4/D . . . . .	page 49

### Terminal blocks with electronic components

DAS.4/D . . . . .	pages 50-51
DAS.4/V . . . . .	page 52
DAS.4/ . . . . .	page 53

### Terminal blocks with special connections and for connectors

AFO.2/1+1 - AFO.2/2+2 - AFO.2/2+2/TP . . . . .	page 54
PDF.2 - FDP.2 - CVF.4 . . . . .	page 55
CVF.4/ . . . . .	page 56
CF.12/1+1 . . . . .	page 57
CF.12/2+2 . . . . .	page 58
TC/PO (for thermocouple circuits) . . . . .	page 59
VPC.2 . . . . .	page 60
VPD.2 . . . . .	page 61
MAC - CAM system . . . . .	pages 62-63

### Mini-terminal blocks

RN.1 - RN.2 - RP.4 . . . . .	page 64
RFI.2 - TR.2 - TR.4 . . . . .	page 65

### Multi-pole modular terminal boards

BPL - TPL series . . . . .	pages 66-68
----------------------------	-------------


### Neutral disconnect terminal blocks

CNT series . . . . .	page 69
----------------------	---------

# CBC Series

with UL94V-0 polyamide insulating body

- UL94V-0
- reduced overall dimension
- patented "Easy bridge" system: double possibility to insert PTC multi-pole cross-connections, without the need of insulating protection
- mounting onto PR/3 type rails, according to IEC 60715 Std., "TH/35" type
- available in grey RAL 7042 and beige RAL 1001 colours
- **CBC/GR Series:**
  - **CESI 08 ATEX 061 U** Ex e certificate I M2 / II 2 G D operating temperature range:  $-40 \div +80$  °C
  - **CoC IEC Ex N. CES 09.0002U** Ex e II

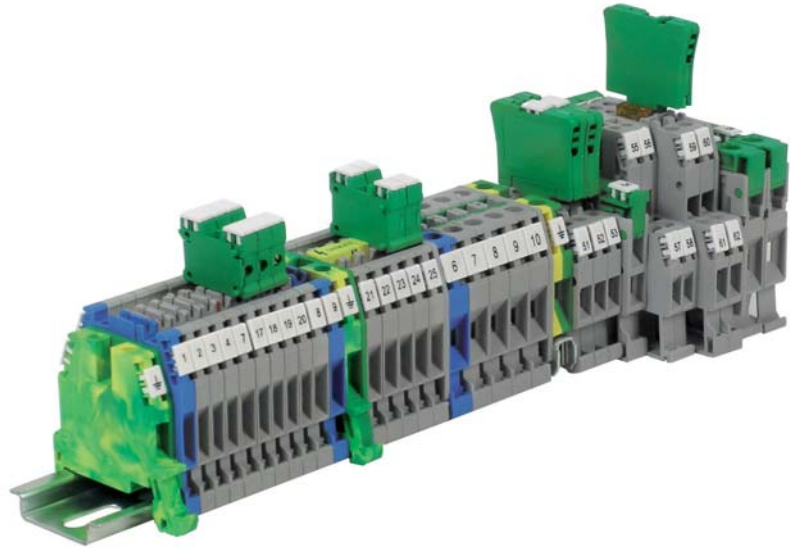

The design accuracy allows that terminal blocks having different cross-sections can nevertheless guarantee visual uniformity once the rail assembly is made.

## Easy Bridge System

The cross-connection can be supplied in "standard" sizes, for 2-3-5-10 poles, or alternatively in lengths of 250 mm.




1

2


3

4


5

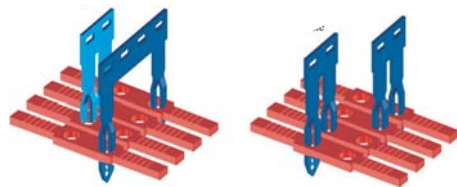

Multi-pole CBC.2 cross-connection



2 pole CBC.2 cross-connection




**1-2** After having cut the bar according to the number of poles, insert the cross-connection, in the appropriate groove of the terminal block. At this point, by using the blade of a screwdriver, push down the cross-connection until it reaches its blocking point. The cross connection will be fully insulated and intrinsically IPXXB protected.

**3-4** After having mounted the cross-connection, the connected poles can be outlined and detected by placing the PTC/SP green strip. This strip is supplied in a standard length of 100 mm and it can be easily cut to the appropriate length with the aid of a cutter.


**5** To remove the cross-connection, it is sufficient to remove the PTC/SP strip; insert the blade of the screwdriver in the jumper slot, then lift it up and finally extract it.

The "Easy Bridge" connection system guarantees the most diversified transversal connecting possibilities, even staggered.


The jumpers can be used to connect in parallel terminal blocks having equal cross-section and the first of the adjoining group of terminal blocks of different size.

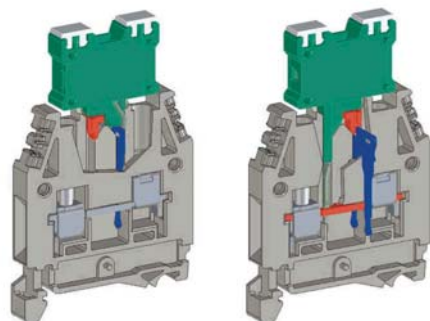

SDC mounted




SDC/P mounted



SDC - SDC/P with conductors



DFM/900



DFM/800



# CBC Series

with UL94V-0 polyamide insulating body

- UL94V-0
- reduced overall dimension
- patented "Easy bridge" system: double possibility to insert PTC multi-pole cross-connections, without the need of insulating protection
- mounting onto PR/3 type rails, according to IEC 60715 Std., "TH/35" type
- available in grey RAL 7042 and beige RAL 1001 colours
- **CBC/GR Series:**
  - **CESI 08 ATEX 061 U Ex e** certificate I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C
  - **CoC IEC Ex N. CES 09.0002U Ex e II**



(\*): 24 A factory wiring only  
(\*\*): 32 A factory wiring only

The /GR tag indicates the grey colour version.

Values in brackets are referred to the Ex e application

PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING

Terminal block	Jumper	Insulation voltage in the above configurations (V)				
<b>CBC.2</b>	<b>PTC/2</b>	630 (400)	630 (400)	1000 (400)	500 (320)	500 (320)
<b>CBC.4</b>	<b>PTC/4</b>	630 (320)	500 (320)	800 (320)	500 (320)	500 (320)
<b>CBC.6</b>	<b>PTC/6</b>	630 (320)	630 (320)	800 (320)	630 (250)	630 (250)

grey version	
beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
max current (*)	
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm

CBC.2/GR	Cat. No.	CBC02GR
<b>CBC.2</b>	Cat. No.	<b>CBC02</b>
<b>CBC.2 (Ex)i</b>	Cat. No.	<b>CBI02</b>
feed-through		
2,5		
0,2 ÷ 4		
0,2 ÷ 4		
2,5 - WP25/14		
1000 V / 32 A (4 mm <sup>2</sup> ) / A3		
600 V / 20 A (*) / 20-12 AWG / 0,4 Nm		
27 A (2,5 mm <sup>2</sup> ) / 37 A (4 mm <sup>2</sup> )		
500		
12 KV / 3		
9		
0,4 / 0,8		
52 / 44 / 5		
60 / 44 / 5		

CBC.4/GR	Cat. No.	CBC04GR
<b>CBC.4</b>	Cat. No.	<b>CBC04</b>
<b>CBC.4 (Ex)i</b>	Cat. No.	<b>CBI04</b>
feed-through		
4		
0,2 ÷ 6		
0,2 ÷ 6		
4 - WP40/16		
1000 V / 41 A (6 mm <sup>2</sup> ) / A4		
600 V / 30 A (**) / 20-10 AWG / 0,5 Nm		
38 A (4 mm <sup>2</sup> ) / 45 A (6 mm <sup>2</sup> )		
500		
12 KV / 3		
10		
0,5 / 1,2		
52 / 44 / 6		
60 / 44 / 6		

CBC.6/GR	Cat. No.	CBC06GR
<b>CBC.6</b>	Cat. No.	<b>CBC06</b>
<b>CBC.6 (Ex)i</b>	Cat. No.	<b>CBI06</b>
feed-through		
6		
0,2 ÷ 10		
0,2 ÷ 10		
6 - WP60/20		
1000 V / 57 A (10 mm <sup>2</sup> ) / A5		
600 V / 50 A / 20-8 AWG / 1,7 Nm		
53 A (6 mm <sup>2</sup> ) / 64 A (10 mm <sup>2</sup> )		
500		
12 KV / 3		
10		
0,8 / 1,4		
52 / 44 / 8		
60 / 44 / 8		

## APPROVALS



ACCESSORIES	
End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper (same, Ex e version)	(A)
Cross-connection identification strip (100 mm)	green
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>CBC.2-10/PT/GR</b>	CB061GR
<b>CBC.2-10/PT</b>	CB061
<b>CBC.2-10/PT (Ex)i</b>	CBI061
<b>PTC/2/02</b> poles	PTC0202
<b>PTC/2/03</b> poles	PTC0203
<b>PTC/2/05</b> poles	PTC0205
<b>PTC/2/10</b> poles	PTC0210
<b>PTC/2/00</b> (50 poles)	PTC0200
<b>24 / (21)</b>	
<b>PTC/SP</b>	PTC0990
-	
<b>DFU/4</b>	DU04..
<b>DFM/800 - DFM/900</b>	DF800-900
-	
<b>SDC/5 - SDC/5P</b>	DC005-DC05P
<b>SDC/POL</b>	DCPOL
-	
<b>CNU/8/51</b>	NU0851
<b>PRP/7/G</b> (100 mm)	PRP070G
-	
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
<b>BT/3</b> for PR/3 only	BT003
-	
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>CBC.2-10/PT/GR</b>	CB061GR
<b>CBC.2-10/PT</b>	CB061
<b>CBC.2-10/PT (Ex)i</b>	CBI061
<b>PTC/4/02</b> poles	PTC0402
<b>PTC/4/03</b> poles	PTC0403
<b>PTC/4/05</b> poles	PTC0405
<b>PTC/4/10</b> poles	PTC0410
<b>PTC/4/00</b> (42 poles)	PTC0400
<b>32 / (25)</b>	
<b>PTC/SP</b>	PTC0990
-	
<b>DFU/4</b>	DU04..
<b>DFM/800 - DFM/900</b>	DF800-900
-	
<b>SDC/6 - SDC/6P</b>	DC006-DC06P
<b>SDC/POL</b>	DCPOL
-	
<b>CNU/8/61</b>	NU0861
<b>PRP/7/G</b> (100 mm)	PRP070G
-	
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
<b>BT/3</b> for PR/3 only	BT003
-	
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>CBC.2-10/PT/GR</b>	CB061GR
<b>CBC.2-10/PT</b>	CB061
<b>CBC.2-10/PT (Ex)i</b>	CBI061
<b>PTC/6/02</b> poles	PTC0602
<b>PTC/6/03</b> poles	PTC0603
<b>PTC/6/05</b> poles	PTC0605
<b>PTC/6/10</b> poles	PTC0610
<b>PTC/6/00</b> (31 poles)	PTC0600
<b>41 / (35)</b>	
<b>PTC/SP</b>	PTC0990
-	
<b>DFU/4</b>	DU04..
<b>DFM/800 - DFM/900</b>	DF800-900
-	
<b>CNU/8/51</b>	NU0851
<b>PRP/7/G</b> (100 mm)	PRP070G
-	
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
<b>BT/3</b> for PR/3 only	BT003
-	
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

# CBC Series

with UL94V-0 polyamide insulating body

- UL94V-0
- reduced overall dimension
- patented "Easy bridge" system: double possibility to insert PTC multi-pole cross-connections, without the need of insulating protection
- mounting onto PR/3 type rails, according to IEC 60715 Std., "TH/35" type
- available in grey RAL 7042 and beige RAL 1001 colours
- **CBC/GR Series:**
  - **CESI 08 ATEX 061 U Ex e** certificate I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C
  - **CoC IEC Ex N. CES 09.0002U Ex e II**



The **/GR** tag indicates the grey colour version.

Values in brackets are referred to the Ex e application

PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING

Terminal block	Jumper	Insulation voltage in the above configurations (V)					
<b>CBC.10</b>	<b>PTC/10</b>	800 (250)	630 (320)		800 (250)	800 (250)	630 (250)
<b>CBC.16</b>	<b>PTC/10</b>	(320)	(320)		(500)	-	-
<b>CBC.35</b>	<b>PTC/10</b>	(250)	-		(630)	-	-

grey version	
beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
max current (*)	
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm

CBC.10/GR	Cat. No. CBC10GR
<b>CBC.10</b>	Cat. No. <b>CBC10</b>
<b>CBC.10 (Ex)i</b>	Cat. No. <b>CB10</b>
feed-through	10
flexible	1,5 ÷ 16
rigid	1,5 ÷ 16
max. flexible with ferrule	10 - WP100/21
rated voltage / rated current / gauge	1000 V / 76 A (16 mm <sup>2</sup> ) / B6
rated voltage / rated current / AWG / tightening torque value	600 V / 65 A / 14-6 AWG / 1,9 Nm
max current (*)	70 A (10 mm <sup>2</sup> ) / 85 A (16 mm <sup>2</sup> )
(Ex e) rated voltage	400
rated impulse withstand voltage / pollution degree	12 KV / 3
insulation stripping length	12
tightening torque value (test / max)	1,2 / 1,9
height / width / thickness	52 / 44 / 10
height / width / thickness	60 / 44 / 10

CBC.16/GR	Cat. No. CBC16GR
<b>CBC.16</b>	Cat. No. <b>CBC16</b>
<b>CBC.16 (Ex)i</b>	Cat. No. <b>CB16</b>
feed-through	25
flexible	1,5 ÷ 25
rigid	1,5 ÷ 25
max. flexible with ferrule	16 - WP160/22
rated voltage / rated current / gauge	1000 V / 101 A (25 mm <sup>2</sup> ) / B7
rated voltage / rated current / AWG / tightening torque value	600 V / 100 A / 16-3 AWG / 2,8 Nm
max current (*)	95 A (16 mm <sup>2</sup> ) / 114 A (25 mm <sup>2</sup> )
(Ex e) rated voltage	500
rated impulse withstand voltage / pollution degree	12 KV / 3
insulation stripping length	15
tightening torque value (test / max)	2 / 3
height / width / thickness	56 / 47 / 12
height / width / thickness	64 / 47 / 12

CBC.35/GR	Cat. No. CBC35GR
<b>CBC.35</b>	Cat. No. <b>CBC35</b>
<b>CBC.35 (Ex)i</b>	Cat. No. <b>CB135</b>
feed-through	50
flexible	2,5 ÷ 50
rigid	2,5 ÷ 50
max. flexible with ferrule	35 - WP350/30
rated voltage / rated current / gauge	1000 V / 150 A (50 mm <sup>2</sup> ) / B9
rated voltage / rated current / AWG / tightening torque value	600 V / 125 A / 20-1 AWG / 8,47 Nm
max current (*)	134 A (35 mm <sup>2</sup> ) / 160 A (50 mm <sup>2</sup> )
(Ex e) rated voltage	630
rated impulse withstand voltage / pollution degree	12 KV / 3
insulation stripping length	18
tightening torque value (test / max)	2,5 / 5
height / width / thickness	63 / 56 / 16
height / width / thickness	71 / 56 / 16

## APPROVALS



ACCESSORIES	
End sections	grey beige blue
Permanent cross connection (*)	(*) intrinsically IPXXB protected once mounted
Rated current carrying capacity of jumper (same, Ex e version)	(A)
Cross-connection identification strip (100 mm)	green
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>CBC.2-10/PT/GR</b>	CB061GR
<b>CBC.2-10/PT</b>	CB061
<b>CBC.2-10/PT (Ex)i</b>	CB1061
<b>PTC/10/02</b> poles (*)	PTC1002
<b>PTC/10/03</b> poles (*)	PTC1003
<b>PTC/10/05</b> poles (*)	PTC1005
<b>PTC/10/10</b> poles (*)	PTC1010
<b>PTC/10/00</b> (25 poles) (*)	PTC1000
<b>57 / (47)</b>	
<b>PTC/SP</b>	PTC0990
-	-
<b>DFU/4</b>	DU04..
<b>DFM/800 - DFM/900</b>	DF800-900
-	-
-	-
-	-
-	-
<b>PRP/7/G</b> (100 mm)	PRP070G
-	-
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
<b>BT/3</b> for PR/3 only	BT003
-	-
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>CBC.16/PT/GR</b>	CB161GR
<b>CBC.16/PT</b>	CB161
<b>CBC.16/PT (Ex)i</b>	CB161
<b>POF/53</b>	POF53
<b>(PFX/53)</b>	(PFX53)
(same, Ex e version)	
<b>76 / (76)</b>	
-	-
<b>POS/53</b>	POS53
<b>PMP/05</b>	PMP05
<b>CPM/53 (CPX/53)</b>	CPM53 (CPX53)
<b>DFU/4</b>	DU04..
<b>DFM/700</b>	DF700
<b>PSD/B</b>	PD002
<b>SDD/2</b>	DD002
-	-
-	-
-	-
<b>TUM/16</b> on 3 and 4	TUM16
-	-
<b>PRP/7</b>	PRP07
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
<b>BT/3</b> for PR/3 only	BT003
-	-
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>CBC.35/PT/GR</b>	CB351GR
<b>CBC.35/PT</b>	CB351
<b>CBC.35/PT (Ex)i</b>	CB1351
<b>POF/06</b>	POF06
<b>PFX/06</b>	(PFX06)
(same, Ex e version)	
<b>125 / (125)</b>	
-	-
<b>PMP/06</b>	PMP06
<b>CPM/06 (CPX/06)</b>	CPM06 (CPX06)
<b>DFU/5</b>	DU05..
<b>DFM/700</b>	DF700
<b>PSD/B</b>	PD002
<b>SDD/2</b>	DD002
-	-
-	-
-	-
<b>TUM/06</b> on 3 and 4	TUM06
-	-
<b>PRP/8</b>	PRP08
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
<b>BT/3</b> for PR/3 only	BT003
-	-
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

# CBR Series

with **UL94V-0 polyamide insulating body**

- UL94V-0
- reduced overall dimension
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours




The **/GR** tag indicates the grey colour version.

grey version		<b>CBR.2/GR</b>	
		Cat. No.	<b>CR110GR</b>
beige version		<b>CBR.2</b>	
		Cat. No.	<b>CR110</b>
(Ex)i version			
TECHNICAL CHARACTERISTICS			
function / type		feed-through (2 inputs / 2 outputs)	
rated cross-section	(mm <sup>2</sup> )	2,5	
connecting capacity			
flexible	(mm <sup>2</sup> )	0,2 ÷ 4	
rigid	(mm <sup>2</sup> )	0,2 ÷ 4	
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type		2,5 - WP25/14	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1	800 V / 24 A / A3	
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage	600 V / 15 A / 20-14 AWG / 5,5 lb.in	
rated impulse withstand voltage / pollution degree		-	
insulation stripping length	(mm)	8 KV / 3	
tightening torque value (test / max)	(Nm)	8 (upper) / 14,5 (lower)	
height / width / thickness	TH/35 7,5 mm	0,4 / 0,8	
height / width / thickness	TH/35 15 mm	52 / 43 / 5	
height / width / thickness	G32	60 / 43 / 5	
		56 / 43 / 5	
APPROVALS			
ACCESSORIES		Type	Cat. No.
End sections	grey beige blue	<b>CBR/PT/GR</b>	CR111GR
Permanent cross connection		<b>CBR/PT</b>	CR111
Rated current carrying capacity of jumper	(A)	<b>PM/25/2</b> poles	PM252
Cross-connection identification strip (100 mm)	green	<b>PM/25/3</b> poles	PM253
Switchable cross connection		<b>PM/25/5</b> poles	PM255
Multiple common bar	250 mm	<b>PM/25/10</b> poles	PM250
Shunting screw and sleeve		<b>24</b>	
Coloured partition	red, green, white	-	
Cross connection barrier	red	-	
Test plug socket		<b>PMP/25</b>	PMP25
Test plug		<b>CPM/25</b>	CPM25
Modular test plug		<b>DFU/4</b>	DU04..
End section for modular test plug		-	
Numbering strip		<b>PSD/K</b>	PD011
Warning plate	on adjacent terminal blocks	<b>SDD/1</b>	DD001
		-	
		-	
		-	
		-	
Cover for cross-connection		<b>PRP/5</b>	PRP05
Marking tag	printed or blank	<b>CNU/8/51</b>	NU0851
End bracket		<b>BTU</b> for PR/DIN and PR/3	BT005
		<b>BTO</b> for PR/3 only	BT007
		<b>BT/3</b> for PR/3 only	BT003
		<b>BT/DIN/PO</b>	BT001
Mounting rail		<b>PR/DIN/AC</b> for PR/DIN and PR/3	PR001
according to IEC 60715 Std.		<b>PR/DIN/AS</b> same with slots	PR004
		<b>PR/DIN/AL</b> of aluminium	PR002
		<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
		<b>PR/3/AS</b> same with slots	PR005

# GPA Series power terminal blocks

with UL94V-0 polyamide insulating body

- mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- panel mount version available - M6 screw (screw with groove for screwdriver and washer recommended)
- possibility to obtain compactness of the resulting rail assembly by means of an M3 threaded rod
- possibility to perform parallel cross-connections (GPA.70)
- standard version available in grey RAL 7042 and beige RAL 1001 colours; panel-mount version available in beige RAL 1001 colour

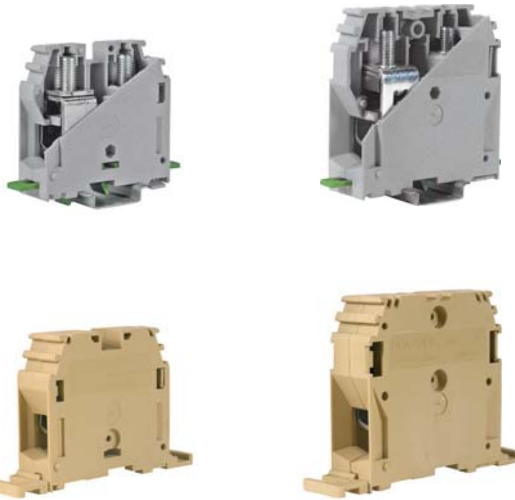

version suited to be used in (Ex)i "intrinsic safety" circuits (RAL 5015 blue colour)  
**GPA.70 (Ex)i Cat. No. GA410**  
**GPA.95 (Ex)i Cat. No. GA110**

The **/GR** tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>grey panel-mount version</b>	
<b>beige panel-mount version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section (mm <sup>2</sup> )	
connecting capacity	
flexible (mm <sup>2</sup> )	
rigid (mm <sup>2</sup> )	
bars and/or cable lugs	
rated voltage / rated current / gauge conf. to IEC 60947-7-1	
rated voltage / rated current / AWG / tightening torque value UL	
rated impulse withstand voltage / pollution degree	
insulation stripping length (mm)	
tightening torque value - bar (test / recommended) (Nm)	
tightening torque value - cable (test / recommended) (Nm)	
height / width / thickness TH/35 7,5 mm	
height / width / thickness TH/35 15 mm	
height / width / thickness G32	
height / width (fixing distance between centres) / thickness (panel mount)	

<b>GPA.70/GR</b>	Cat. No. <b>GA400GR</b>
<b>GPA.70</b>	Cat. No. <b>GA400</b>
<b>GPA.70/FIX/GR</b>	Cat. No. <b>GF400GR</b>
<b>GPA.70/FIX</b>	Cat. No. <b>GF400</b>

<b>GPA.95/GR</b>	Cat. No. <b>GA100GR</b>
<b>GPA.95</b>	Cat. No. <b>GA100</b>
<b>GPA.95/FIX/GR</b>	Cat. No. <b>GF100GR</b>
<b>GPA.95/FIX</b>	Cat. No. <b>GF100</b>

feed-through	70
10 ÷ 95	
10 ÷ 95	
-	
1000 V / 192 A / B11	
1000 V / 215 A / 8 AWG str. ÷ 4/0 AWG str. / 79,5 lb.in	
12 KV / 3	
25	
-	
6 / 9 (Allen screw, 4 mm wrench)	
70 / 91 / 20,5	
78 / 91 / 20,5	
75 / 91 / 20,5	
75 / 102 (88) / 20,5	

feed-through	95
10 ÷ 95	
10 ÷ 120	
-	
1000 V / 232 A / B12	
1000 V / 232 A / 2 AWG sol./str. ÷ 250 MCM str. / 90 lb.in.	
12 KV / 3	
30	
-	
6 / 9 (Allen screw, 4 mm wrench)	
87 / 98 / 26	
95 / 98 / 26	
91 / 98 / 26	
91 / 111 (97) / 26	



## APPROVALS

<b>ACCESSORIES</b>	
End sections	grey beige
Permanent cross connection	
Rated current carrying capacity of jumper (A)	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Cover for cross-connection	
Mounting rail support	flat for PR/DIN and PR/3 sloped for PR/DIN and PR/3
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	


Type	Cat. No.
-	-
<b>POF/70</b> (2 poles)	POF70
<b>192</b>	
<b>PMP/08</b>	PMP08
<b>CPM/70</b>	CPM70
<b>DF/GPA/70</b>	DU070
-	-
<b>PSD/C</b>	PD003
<b>SDD/2</b>	DD002
-	-
<b>PRP/08</b>	PRP08
<b>ACI121213</b>	Z121213
<b>ACI121024</b>	Z121024
<b>CNU/8/51</b>	NU0851
-	-
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>CDA/BT</b> for PR/DIN only	CD003
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
<b>ACI121213</b>	Z121213
<b>ACI121024</b>	Z121024
<b>CNU/8/51</b>	NU0851
-	-
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>CDA/BT</b> for PR/DIN only	CD003
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

# GPA Series power terminal blocks

with UL94V-0 polyamide insulating body

- mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- panel mount version available - M6 screw (screw with groove for screwdriver and washer recommended)
- possibility to obtain compactness of the resulting rail assembly by means of an M3 threaded rod
- possibility to perform parallel cross-connections
- available in beige RAL 1001 colour

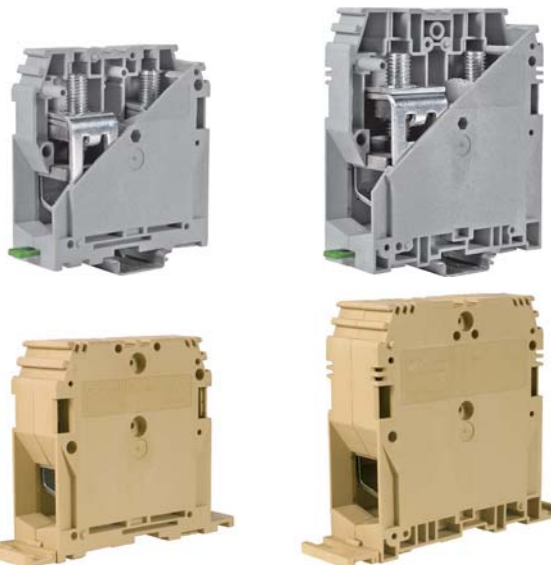

<b>grey version</b>	
<b>beige version</b>	
<b>grey panel-mount version</b>	
<b>beige panel-mount version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section (mm²)	
connecting capacity flexible (mm²)	
connecting capacity rigid (mm²)	
bars and/or cable lugs	
rated voltage / rated current / gauge conf. to IEC 60947-7-1	
rated voltage / rated current / AWG / tightening torque value UL	
rated impulse withstand voltage / pollution degree	
insulation stripping length (mm)	
tightening torque value - bar (test / recommended) (Nm)	
tightening torque value - cable (test / recommended) (Nm)	
height / width / thickness TH/35 7,5 mm	
height / width / thickness TH/35 15 mm	
height / width / thickness G32	
height / width (fixing distance between centres) / thickness (panel mount)	

## APPROVALS

### ACCESSORIES

End sections	grey beige
Permanent cross connection	
Rated current carrying capacity of jumper (A)	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Cover for cross-connection	
Mounting rail support	flat for PR/DIN and PR/3 sloped for PR/DIN and PR/3
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

<b>GPA.150/GR</b> Cat. No. <b>GA200GR</b>
<b>GPA.150</b> Cat. No. <b>GA200</b>
<b>GPA.150/FIX/GR</b> Cat. No. <b>GF200GR</b>
<b>GPA.150/FIX</b> Cat. No. <b>GF200</b>

feed-through	150
	50 ÷ 150
	50 ÷ 185
	-
	1000 V / 309 A / B14
	1000 V / 309 A / 1/0 AWG str ÷ 350 MCM str. / 142 lb.in
	12 KV / 3
	35
	-
	10 / 15 (Allen screw, 5 mm wrench)
	99 / 108 / 31
	106 / 108 / 31
	103 / 108 / 31
	94 / 122 (106) / 31



Type	Cat. No.
------	----------

-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
<b>ACI121213</b>	Z121213
<b>ACI121024</b>	Z121024
<b>CNU/8/51</b>	NU0851
-	-
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>CDA/BT</b> for PR/DIN only	CD003
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

<b>GPA.240/GR</b> Cat. No. <b>GA300GR</b>
<b>GPA.240</b> Cat. No. <b>GA300</b>
<b>GPA.240/FIX/GR</b> Cat. No. <b>GF300GR</b>
<b>GPA.240/FIX</b> Cat. No. <b>GF300</b>

feed-through	240
	95 ÷ 240
	50 ÷ 300
	-
	1000 V / 415 A / B16
	1000 V / 415 A / 3/0 AWG str. ÷ 600 MCM str. / 300 lb.in.
	12 KV / 3
	40
	-
	14 / 21 (Allen screw, 6 mm wrench)
	120 / 119 / 37
	128 / 119 / 37
	124 / 119 / 37
	115 / 134 (118) / 37



Type	Cat. No.
------	----------

-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
<b>ACI121213</b>	Z121213
<b>ACI121024</b>	Z121024
<b>CNU/8/51</b>	NU0851
-	-
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>CDA/BT</b> for PR/DIN only	CD003
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

# Earth terminal blocks

with UL94V-0 polyamide insulating body

- mounting onto PR/3 type rails - according to IEC 60715 Std., "TH/35" type
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- in 2 green / yellow insulating cases
- same profile and dimensions of the corresponding terminals of the CBC and GPA Series



version to be mounted onto PR/3 rail	TEC.6/O Cat. No. T0120	TEC.10/O Cat. No. T0510	TEC.16/O Cat. No. T0220
version to be mounted onto PR/DIN rail	TEC.6/D Cat. No. TE120	TEC.10/D Cat. No. TE510	TEC.16/D Cat. No. TE220
TECHNICAL CHARACTERISTICS			
function / type	earth terminal block	earth terminal block	earth terminal block
rated cross-section (mm <sup>2</sup> )	6	10	16
connecting capacity			
flexible (mm <sup>2</sup> )	0,5 ÷ 10	1,5 ÷ 16	1,5 ÷ 25
rigid (mm <sup>2</sup> )	0,5 ÷ 10	1,5 ÷ 16	1,5 ÷ 25
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	6 - WP60/20	10 - WP100/21	16 - WP160/22
tension nom. / corrente nom. / calibre sec. IEC 60947-7-2	- / 41 A / A5	- / 57 A / B6	- / 76 A / B7
rated voltage / rated current / AWG (Ex e) rated voltage (V)	-	-	-
rated impulse withstand voltage / pollution degree	12 KV / 3	12 KV / 3	12 KV / 3
insulation stripping length (mm)	10	12	18
tightening torque value (test / max) (Nm)	0,8 / 1,4	1,2 / 1,9	-
height / width / thickness TH/35 7,5 mm	52 / 44 / 8	52 / 44 / 10	56 / 47 / 12
height / width / thickness TH/35 15 mm	60 / 44 / 8	60 / 44 / 10	64 / 47 / 12
height / width / thickness G32	53 / 44 / 8	53 / 44 / 10	57 / 47 / 12

## APPROVALS



UL, cUL, ATEX Ex e and IEC Ex pending



UL, cUL, ATEX Ex e and IEC Ex pending



UL, cUL, ATEX Ex e and IEC Ex pending

ACCESSORIES	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
End sections	-	-	-	-	-	-
Marking tag printed or blank	CNU/8/51	NU0851	CNU/8/51 CSC	NU0851 CS...	CNU/8/51 CSC	NU0851 CS...
Numbering strip	-	-	-	-	-	-
End bracket	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005
	BT/3-BTO for PR/3 only	BT003-BT007	BT/3-BTO for PR/3 only	BT003-BT007	BT/3-BTO for PR/3 only	BT003-BT007
	BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001
	PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001
	PR/3/AS same with slots	PR004	PR/3/AS same with slots	PR004	PR/3/AS same with slots	PR004
	PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002
	PR/3/AC of steel	PR003	PR/3/AC of steel	PR003	PR/3/AC of steel	PR003
	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005

## MAXIMUM SHORT-TIME WITHSTAND CURRENTS ALLOCATED TO THE RAIL PROFILE


Rail profile	Material	Equivalent E-cu cross-section mm <sup>2</sup>	Short-time withstand current 1 s kA	Thermal rated current of a PEN busbar A
"Top hat" rail IEC 60715/TH 15 - 5,5	Steel	10	1,2	-
	Copper	25	3	101
	Aluminium	16	1,92	76
G32-type rail IEC 60715/G32	Steel	35	4,2	-
	Copper	120	14,4	269
	Aluminium	70	8,4	192
"Top hat" rail IEC 60715/TH 35 - 7,5	Steel	16	1,92	-
	Copper	50	6	150
	Aluminium	35	4,2	125
"Top hat" rail IEC 60715/TH 35 - 15	Steel	50	6	-
	Copper	150	18	309
	Aluminium	95	11,4	232

Taken from CEI EN 60947-7-2 standard

# Earth terminal blocks

with UL94V-0 polyamide insulating body

- mounting onto PR/3 type rails - according to IEC 60715 Std., "TH/35" type
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- in 2 green / yellow insulating cases
- same profile and dimensions of the corresponding terminals of the CBC and GPA Series

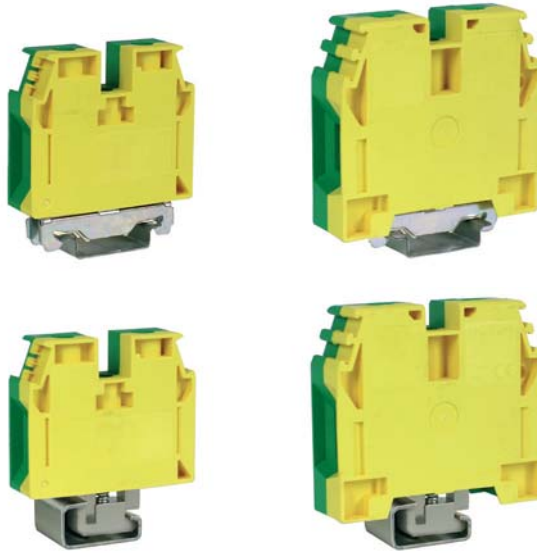

**version to be mounted onto PR/3 rail**

**version to be mounted onto PR/DIN rail**

**TEC.35/O**  
Cat. No. **T0320**

**TEC.35/D**  
Cat. No. **TE320**

**TEC.70/O**  
Cat. No. **T0810**

**TEC.70/D**  
Cat. No. **TE820**

TECHNICAL CHARACTERISTICS	
function / type	earth terminal block
rated cross-section (mm <sup>2</sup> )	35
connecting capacity	
flexible (mm <sup>2</sup> )	2,5 ÷ 50
rigid (mm <sup>2</sup> )	2,5 ÷ 50
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	-
tensione nom. / corrente nom. / calibro sec. IEC 60947-7-2	- / 125 A / B9
rated voltage / rated current / AWG (Ex e) rated voltage (V)	-
rated impulse withstand voltage / pollution degree	12 KV / 3
insulation stripping length (mm)	18
tightening torque value (test / max) (Nm)	2,5 / 5
height / width / thickness TH/35 7,5 mm	63 / 56 / 16
height / width / thickness TH/35 15 mm	71 / 56 / 16
height / width / thickness G32	64 / 56 / 16

function / type	earth terminal block
rated cross-section (mm <sup>2</sup> )	35
connecting capacity	
flexible (mm <sup>2</sup> )	2,5 ÷ 50
rigid (mm <sup>2</sup> )	2,5 ÷ 50
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	-
tensione nom. / corrente nom. / calibro sec. IEC 60947-7-2	- / 125 A / B9
rated voltage / rated current / AWG (Ex e) rated voltage (V)	-
rated impulse withstand voltage / pollution degree	12 KV / 3
insulation stripping length (mm)	18
tightening torque value (test / max) (Nm)	2,5 / 5
height / width / thickness TH/35 7,5 mm	63 / 56 / 16
height / width / thickness TH/35 15 mm	71 / 56 / 16
height / width / thickness G32	64 / 56 / 16

function / type	earth terminal block
rated cross-section (mm <sup>2</sup> )	71
connecting capacity	
flexible (mm <sup>2</sup> )	10 ÷ 95
rigid (mm <sup>2</sup> )	10 ÷ 95
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	-
tensione nom. / corrente nom. / calibro sec. IEC 60947-7-2	- / 192 A / B11
rated voltage / rated current / AWG (Ex e) rated voltage (V)	-
rated impulse withstand voltage / pollution degree	12 KV / 3
insulation stripping length (mm)	25
tightening torque value (test / max) (Nm)	6 / 9 (vite cava esag. chiave 4 mm)
height / width / thickness TH/35 7,5 mm	74 / 70 / 20,5
height / width / thickness TH/35 15 mm	81,5 / 70 / 20,5
height / width / thickness G32	75 / 70 / 20,5

## APPROVALS



UL, cUL, ATEX Ex e and IEC Ex pending



UL, cUL, ATEX Ex e and IEC Ex pending

## ACCESSORIES

End sections	
Marking tag	printed or blank
Numbering strip	
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
-	-
<b>CNU/8/51</b>	NU0851
<b>CSC</b>	CS...
-	-
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/3/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
-	-
<b>CNU/8/51</b>	NU0851
<b>CSC</b>	CS...
-	-
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/3/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

## MAXIMUM SHORT-TIME WITHSTAND CURRENTS ALLOCATED TO THE RAIL PROFILE


Rail profile	Material	Equivalent E-cu cross-section mm <sup>2</sup>	Short-time withstand current 1 s kA	Thermal rated current of a PEN busbar A
"Top hat" rail IEC 60715/TH 15 - 5,5	Steel	10	1,2	-
	Copper	25	3	101
	Aluminium	16	1,92	76
G32-type rail IEC 60715/G32	Steel	35	4,2	-
	Copper	120	14,4	269
	Aluminium	70	8,4	192
"Top hat" rail IEC 60715/TH 35 - 7,5	Steel	16	1,92	-
	Copper	50	6	150
	Aluminium	35	4,2	125
"Top hat" rail IEC 60715/TH 35 - 15	Steel	50	6	-
	Copper	150	18	309
	Aluminium	95	11,4	232

Taken from  
CEI EN 60947-7-2  
standard

# CBD Series

## Screw-clamp feed-through terminal blocks with polyamide insulating body

- UL94V-0 flame behaviour
- universal mounting onto PR/DIN and PR/3 type rails according to IEC 60715 Std.
- **CESI 01 ATEX 090 U Ex e** certificate I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C
- **CoC IEC Ex CES 09.0009U Ex e II**
- available in standard (beige RAL 1001 colour) or (Ex) "intrinsic safety" circuits (blue RAL 5015 colour) versions

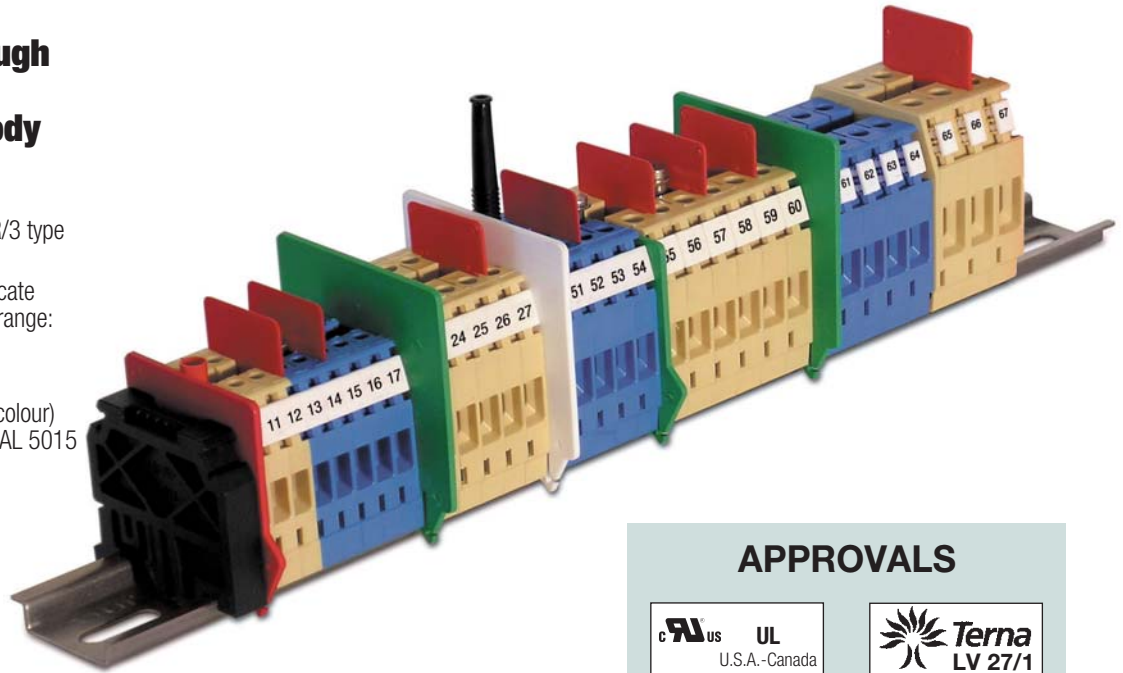

The CBD Series consists of eight sizes, featuring:

- reduced overall dimension
- high connecting capacity
- superior effective current carrying capacity, with respect to the prescribed reference values
- very low contact resistance of the resulting connection
- materials of excellent quality and, consequently, maximum reliability throughout time
- very practical usage

Cabur has always designated every product through a type reference, consisting of letters (usually 3) and a number, with an interposing full-stop.

With this number the **rated cross-section** of the terminal block itself has always been defined; this value, as the reference Standard states "...is a value of connectable conductor cross-section, stated by the manufacturer, and to which certain thermal, mechanical and electrical requirements are referred".

Nevertheless, the application field of the terminal block is much wider and is defined by its **connecting capacity**, in other words the range of conductor sizes, both rigid and flexible, minimum and maximum, that a terminal block can connect, fully respecting all the parameters given by the reference standards.

In the following table, in fact, the "usual" type reference of every terminal block has been integrated with the addition, after the existing digits which retain the indication of the rated cross-section, of another numerical value (written in smaller characters, in red and separated by the digits indicating the rated cross-section by a /). This second group of digits represents, in mm<sup>2</sup>, the **maximum size of the flexible conductor that can effectively be connected to the terminal block**. If rigid conductors (solid or stranded) are to be connected, reference must be always made to the indications given by the relevant technical characteristics of each product and under "connecting capacity"; in most cases in fact the size of the maximum rigid conductor is even greater.

By stating the wide connecting capacity feature, with the occasion some sizes among the CBD Series have been reconsidered; firmly maintaining the eight rated cross-sections, the existing types CBD.25 and CBD.35 have been reviewed and, after the actions and the verifications which have taken place, re-evaluated as **CBD.35 e CBD.50**; the latter rated cross-section up to this point, has never considered within Cabur product range, but has nevertheless wide use.

### APPROVALS

**UL**  
U.S.A.-Canada

**Terna**  
LV 27/1

**KEMA - KEUR**  
The Netherlands

**CESI ATEX Ex e**  
Italy

**Enel**  
Distribuzione DV 27/1

**BBJ-SEP**  
Poland

**R.I.N.A.**  
Italy

Type	Rated cross section (mm <sup>2</sup> )	Flexible conductor (mm <sup>2</sup> )		Rigid conductor (mm <sup>2</sup> )		Gauge	Max. current (A)
		min.	max.	min.	max.		
<b>CBD.2/4</b>	2,5	0,5	4	0,5	4	A3	29
<b>CBD.4/6</b>	4	0,5	6	0,5	6	A4	40
<b>CBD.6/10</b>	6	0,5	10	0,5	10	A5	58
<b>CBD.10/16</b>	10	0,5	16	0,5	16	B6	77
<b>CBD.16/25</b>	16	0,5	25	0,5	25	B7	104
<b>CBD.35/35</b>	35	0,5	35	0,5	50	B8	147
<b>CBD.50/50</b>	50	1,5	50	1,0	70	B9	180
<b>CBD.70/95</b>	70	1,5	95	1,0	95	B11	250



**type of connection:**

by means of screws, on both sides, indirect and anti-loosening. The tightening screws are accessible only with an adequate screwdriver and the particular shape of the screws makes it impossible to lose them. The tightening process by means of screws ensures the best mechanical performance and efficiency of the current flow. It is suitable for the connection, with or without preparation of conductors of all cross-sections. The tightening and un-tightening operations are extremely simple and they can be carried out with tools, such as screwdrivers, which are always at hand. It is however important to use an appropriately sized screwdriver in order to avoid the damaging either of the screw itself or the insulating body.

**conducting body:**

of the tube type **entirely of a copper and zinc alloy and treated with nickel-plating**; the characteristics of the material used and the manufacturing methods are such as to avoid the phenomenon of “seasoning cracking”.

**tightening reliability:**

special orthogonal grooves on the bottom of the conducting body and on the lower surface of the pressure plates, ensure under all conditions the perfect electrical contact with the conductors and an efficient mechanical clamp. The grip is made particularly effective by the spring function of the pressure plate, which in a certain way and under the pushing action of the screws, tends to flex; in this way a reaction to the head of the screw itself, is exerted, resisting unscrewing, even under dynamic stress (vibrations).

**ease of insertion:**

insertion of the conductor into the terminal block is made easy by:

- sloping entrance planes on the insulating body
- the rounded edges of the pressure plate
- an appropriately sized entrance hole, with reference to the diameter of the maximum permitted conductor. The depth into which the conductor can be inserted is limited by a partition in the insulating body.



**other functions:**

besides their main as feed-through function, CBD terminal blocks are designed in such a way as to carry out other functions. In fact, by means of a prearranged threaded hole on the upper side of the conducting body it is possible:

- to create a cross-connection (either permanent or switchable) between two adjoining terminal blocks
- to create a multiple common bar connection between several adjoining terminal blocks
- to insert a socket for a test plug
- to insert a composable test plug for multiple signal shunting.

**marking:** all CBD terminal blocks can be marked on both sides by using CNU/8, SNZ or CSC marking tags (the latter system allows the composition of alphanumeric marking up to a maximum of 6 characters (an ADR/6 adapter though is required if more than 4 characters are to be inserted on each side).


**mounting:** CBD series polyamide terminal blocks are designed to be mounted on two types of rail, “G32” or “TH/35” (acc. to the IEC 60715), with obvious advantages towards supply, management and use in general of the product.

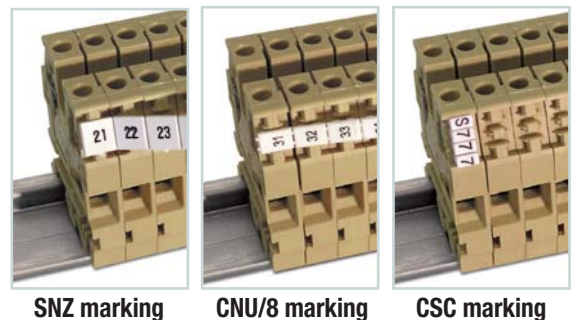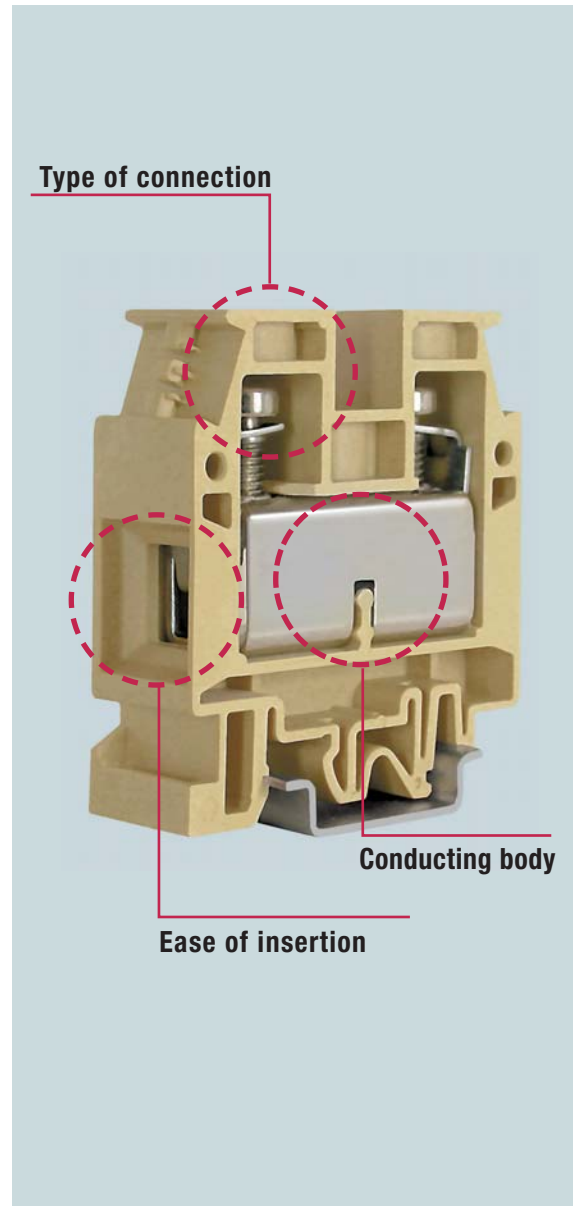

# CBD Series


## Screw-clamp feed-through terminal blocks with polyamide insulating body

- UL94V-0 flame behaviour
- universal mounting onto PR/DIN and PR/3 type rails according to IEC 60715 Std.
- **CESI 01 ATEX 090 U** Ex e  $\text{\textcircled{Ex}}$  certificate I M2 / II 2 G D operating temperature range:  $-40 \div +80 \text{ }^\circ\text{C}$
- **CoC IEC Ex CES 09.0009U** Ex e II
- available in standard (beige RAL 1001 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions

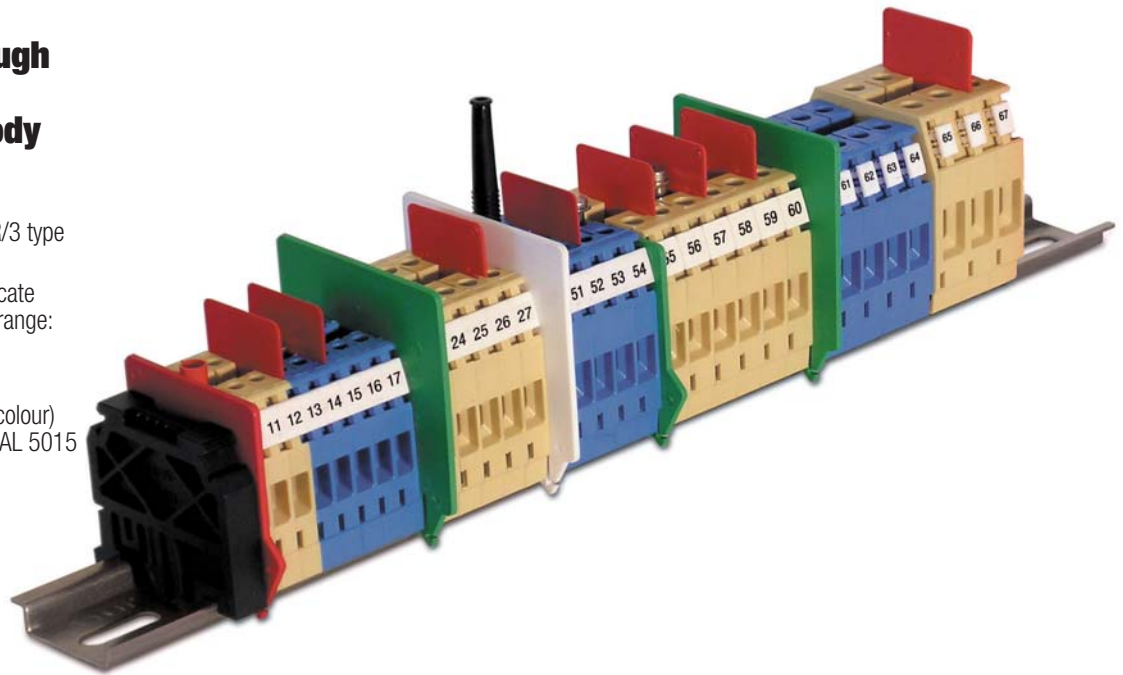

## Accessories

- 1 End section
- 2 Permanent cross connection
- 3 Pre-assembled cross connection
- 4 Switchable cross connection
- 5 Multiple cross connection
- 6 Shunting screw and sleeve
- 7 Coloured partition
- 8 Cross connection barrier
- 9 Test plug socket
- 10 Test plug
- 11 Modular test plug
- 12 Warning plate
- 13 Cross connection cover
- 14 Marking tag
- 15 End bracket
- 16 Mounting rail
- 17 Numbering strip
- 18 Tag adapter

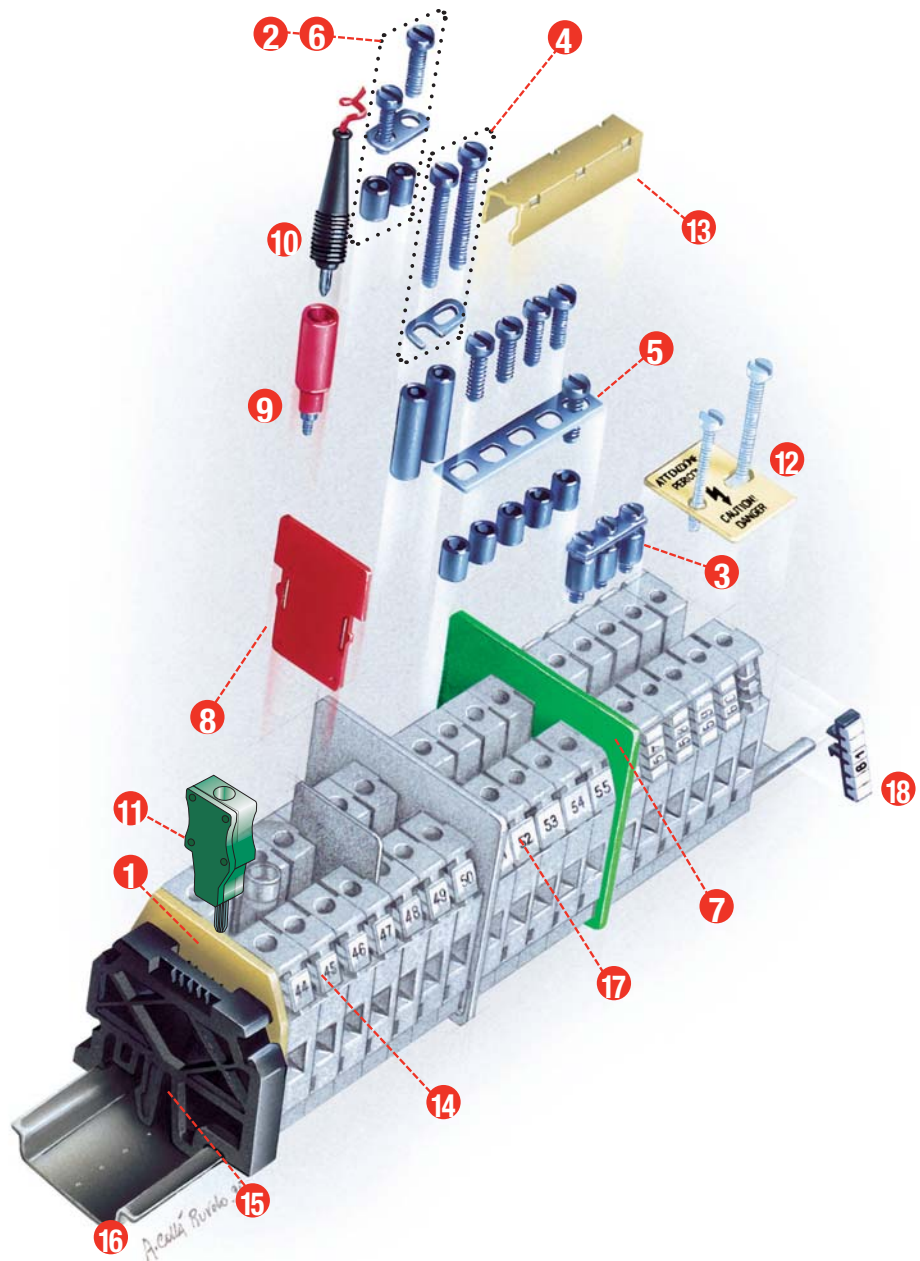

Various accessories (the picture shows those specific to the CBD series, some of which are also used for other models)

# CBD Series

with **UL94V-0 polyamide insulating body**

- UL94V-0
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- **CESI 01 ATEX 090 U** Ex e certificate I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C
- **CoC IEC Ex CES 09.0009U** Ex e II
- when rail assemblies are to be manufactured for potentially explosive environments (Ex e) please refer to the instructions given on page A14
- available in standard (beige RAL 1001 colour) or (Ex) i "intrinsic safety" circuits (blue RAL 5015 colour) versions



(\*): 25 A factory wiring only

(\*\*): 32 A factory wiring only

(\*\*\*) if shielded cables are to be connected, when using CB/SH screening lug, the rated voltage is reduced to 200 V

beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

## APPROVALS

CBD.2	Cat. No.	CB110
CBD.2 (Ex)i	Cat. No.	CBX12
feed-through		
2,5		
0,5 ÷ 4		
0,5 ÷ 4		
2,5 - WP25/14		
800 V / 24 A / A3		
600 V / 20 A (*) / 20-12 AWG / 5,5 lb.in		
500 V / 630 V		
8 KV / 3		
13		
0,4 / 0,8		
47 / 40,5 / 5,5		
55 / 40,5 / 5,5		
51 / 40,5 / 5,5		

CBD.4	Cat. No.	CB240
CBD.4 (Ex)i	Cat. No.	CBX24
feed-through		
4		
0,5 ÷ 6		
0,5 ÷ 6		
4 - WP40/16		
800 V / 32 A / A4		
600 V / 30 A (**) / 20-10 AWG / 8,9 lb.in		
500 V / 630 V		
8 KV / 3		
14		
0,5 / 1,2		
52 / 44 / 6,5		
60 / 44 / 6,5		
56 / 44 / 6,5		

CBD.6	Cat. No.	CB340
CBD.6 (Ex)i	Cat. No.	CBX34
feed-through		
6		
0,5 ÷ 10		
0,5 ÷ 10		
6 - WP60/20		
800 V / 41 A / A5		
600 V / 50 A / 20-8 AWG / 13,3 lb.in		
500 V / 630 V		
8 KV / 3		
14		
0,8 / 1,4		
52 / 44 / 8		
60 / 44 / 8		
56 / 44 / 8		

ACCESSORIES	
End sections	beige blue
Permanent cross connection	
Rated current carrying capacity of jumper (same, Ex e version)	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	
Screening lug	

Type	Cat. No.
CB2/PT	CB111
CB2/PT (Ex)i	CBX13
PM/20/2 poles (pre-assembled)	PM202
PM/20/3 poles (pre-assembled)	PM203
PM/20/5 poles (pre-assembled)	PM205
PM/20/10 poles (pre-assembled)	PM210
24 / (24)	
POS/11	POS11
PMP/01	PMP01
CPM/21 (CPX/21)	CPM21 (CPX21)
DFU/1	DU01..
DFM/600	DF600
PSD/D	PD004
SDD/1	DD001
SDD/5	DD005
SD5/PT	DD501
-	-
TQM/02 su 4	TQM02
-	-
PRP/6	PRP06
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005
CBD/SH (*)	CB009

Type	Cat. No.
CB4/6/PT	CB241
CB4/6/PT (Ex)i	CBX25
PM/40/2 poles (pre-assembled)	PM402
PM/40/3 poles (pre-assembled)	PM403
PM/40/5 poles (pre-assembled)	PM405
PM/40/10 poles (pre-assembled)	PM400
32 / (32)	
POS/42	POS42
PMP/42	PMP42
CPM/12 (CPX/12)	CPM12 (CPX12)
DFU/4	DU04..
DFM/600	DF600
PSD/A	PD001
SDD/1	DD001
SDD/6	DD006
SD6/PT	DD601
-	-
TQM/12 su 3 e su 4	TTM12
-	-
PRP/6	PRP06
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005
CBD/SH (*)	CB009

Type	Cat. No.
CB4/6/PT	CB241
CB4/6/PT (Ex)i	CBX25
PM/60/2 poles (pre-assembled)	PM602
PM/60/3 poles (pre-assembled)	PM603
PM/60/5 poles (pre-assembled)	PM605
PM/60/10 poles (pre-assembled)	PM610
41 / (41)	
POS/93	POS93
PMP/13	PMP13
CPM/83 (CPX/83)	CPM83 (CPX83)
DFU/4	DU04..
DFM/600	DF600
PSD/N	PD013
SDD/1	DD001
-	-
-	-
TTM/15 su 3	TTM15
TQM/15 su 4	TQM15
PRP/7	PRP07
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005
CBD/SH (*)	CB009

# CBD Series

with UL94V-0 polyamide insulating body

- UL94V-0
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- **CESI 01 ATEX 090 U** Ex e certificate I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C
- **CoC IEC Ex CES 09.0009U** Ex e II
- when rail assemblies are to be manufactured for potentially explosive environments (Ex e) please refer to the instructions given on page A14
- available in standard (beige RAL 1001 colour) or (Ex) i "intrinsic safety" circuits (blue RAL 5015 colour)



(\* if shielded cables are to be connected when using CB/SH screening lug, the rated voltage is reduced to 250 V

beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

## APPROVALS

<b>CBD.10</b>	Cat. No. <b>CB440</b>
<b>CBD.10 (Ex)i</b>	Cat. No. <b>CBX45</b>
feed-through	10
0,5 ÷ 16	0,5 ÷ 16
10 - WP100/21	800 V / 57 A / B6
800 V / 60 A / 20-6 AWG / 13,3 lb.in	600 V / 60 A / 20-6 AWG / 13,3 lb.in
500 V / 630 V	500 V / 630 V
8 KV / 3	8 KV / 3
14	14
1,2 / 1,9	1,2 / 1,9
55 / 44 / 10	55 / 44 / 10
63 / 44 / 10	63 / 44 / 10
59 / 44 / 10	59 / 44 / 10
IEC Ex pending	

<b>CBD.16</b>	Cat. No. <b>CB510</b>
<b>CBD.16 (Ex)i</b>	Cat. No. <b>CBX52</b>
feed-through	16
0,5 ÷ 25	0,5 ÷ 25
16 - WP160/22	800 V / 76 A / B7
800 V / 100 A / 20-3 AWG / 19,9 lb.in	600 V / 100 A / 20-3 AWG / 19,9 lb.in
630 V / 630 V	630 V / 630 V
8 KV / 3	8 KV / 3
18	18
1,8 / 3	1,8 / 3
57 / 47 / 12	57 / 47 / 12
65 / 47 / 12	65 / 47 / 12
61 / 47 / 12	61 / 47 / 12
IEC Ex pending	

<b>CBD.35</b>	Cat. No. <b>CB610</b>
<b>CBD.35 (Ex)i</b>	Cat. No. <b>CBX62</b>
feed-through	35
0,5 ÷ 35	0,5 ÷ 50
35 - WP350/30	800 V / 125 A / B8
800 V / 125 A / 16 ÷ 1 AWG / 22,1 lb.in	600 V / 125 A / 16 ÷ 1 AWG / 22,1 lb.in
630 V / 630 V	630 V / 630 V
8 KV / 3	8 KV / 3
20	20
2 / 3,5	2 / 3,5
60 / 52 / 16	60 / 52 / 16
68 / 52 / 16	68 / 52 / 16
64 / 52 / 16	64 / 52 / 16
IEC Ex pending	

## ACCESSORIES

End sections	beige blue
Permanent cross connection	
Rated current carrying capacity of jumper (same, Ex e version)	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	
Screening lug	

Type	Cat. No.
<b>CB10/PT</b>	CB431
<b>CB10/PT (Ex)i</b>	CBX44
<b>PM/10/2</b> poles (pre-assembled)	PM102
<b>PM/10/3</b> poles (pre-assembled)	PM103
<b>PM/10/5</b> poles (pre-assembled)	PM105
<b>PM/10/10</b> poles (pre-assembled)	PM100
<b>57 / (57)</b>	
<b>POS/44</b>	POS44
<b>PMP/04</b>	PMP04
<b>CPM/03 (CPX/03)</b>	CPM03 (CPX03)
<b>DFU/4</b>	DU04..
<b>DFM/700</b>	DF700
<b>PSD/B</b>	PD002
<b>SDD/2</b>	DD002
-	-
-	-
-	-
<b>TTM/04</b> on 3	TTM04
<b>TQM/04</b> on 4	TQM04
<b>PRP/7</b>	PRP07
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005
<b>CBD/SH</b> (*)	CB009


Type	Cat. No.
<b>CB16/PT</b>	CB511
<b>CB16/PT (Ex)i</b>	CBX53
<b>POF/44 (PFX/44)</b>	POF44 (PFX44)
(same, Ex e version)	
<b>76 / (76)</b>	
<b>POS/44</b>	POS44
<b>PMP/05</b>	PMP05
<b>CPM/44 (CPX/44)</b>	CPM44 (CPX44)
<b>DFU/4</b>	DU04..
<b>DFM/700</b>	DF700
<b>PSD/B</b>	PD002
<b>SDD/2</b>	DD002
-	-
-	-
-	-
<b>TUM/05</b> on 3 and on 4	TUM05
<b>PRP/7</b>	PRP07
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005
-	-

Type	Cat. No.
<b>CB35/PT</b>	CB611
<b>CB35/PT (Ex)i</b>	CBX63
<b>POF/06 (PFX/06)</b>	POF06 (PFX06)
(same, Ex e version)	
<b>125 / (125)</b>	
<b>POS/66</b>	POS66
<b>PMP/06</b>	PMP06
<b>CPM/06 (CPX/06)</b>	CPM06 (CPX06)
<b>DFU/5</b>	DU05..
<b>DFM/700</b>	DF700
<b>PSD/B</b>	PD002
<b>SDD/2</b>	DD002
-	-
-	-
-	-
<b>TUM/06</b> on 3 and on 4	TUM06
<b>PRP/8</b>	PRP08
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005
-	-

# CBD Series

with UL94V-0 polyamide insulating body

- UL94V-0
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- **CESI 01 ATEX 090 U** Ex e certificate I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C
- **CoC IEC Ex CES 09.0009U** Ex e II
- when rail assemblies are to be manufactured for potentially explosive environments (Ex e) please refer to the instructions given on page A14
- available in standard (beige RAL 1001 colour) or (Ex) i "intrinsic safety" circuits (blue RAL 5015 colour)

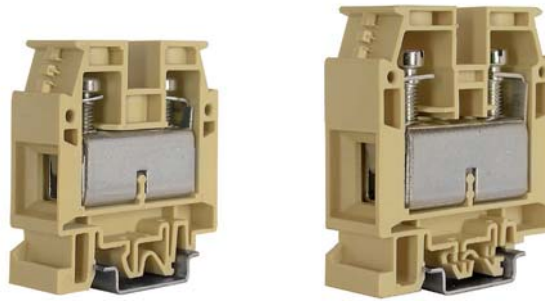

(\*): 150 A factory wiring only

beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

CBD.50	
Cat. No.	<b>CB710</b>
CBD.50 (Ex)i	
Cat. No.	<b>CBX72</b>
feed-through	50
1,5 ÷ 50	
1 ÷ 70	
50 - WP500/40	
800 V / 150 A / B9	
600 V / 130 A (*) / 16-1 AWG / 33,2 lb.in.	
630 V / 630 V	
8 KV / 3	
22	
2,5 / 5	
62 / 57 / 18	
70 / 57 / 18	
66 / 57 / 18	

CBD.70	
Cat. No.	<b>CB810</b>
CBD.70 (Ex)i	
Cat. No.	<b>CBX82</b>
feed-through	70
1,5 ÷ 95	
1 ÷ 95	
-	
800 V / 192 A / B11	
600 V / 220 A / 12 - 4/0 AWG / 50 lb. in.	
630 V / 630 V	
8 KV / 3	
26	
3 / 8	
71 / 62 / 20,5	
79 / 62 / 20,5	
75 / 62 / 20,5	



## APPROVALS

ACCESSORIES	
End sections	beige blue
Permanent cross connection (same, Ex e version)	
Rated current carrying capacity of jumper (same, Ex e version)	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	
Screening lug	

Type	Cat. No.
<b>CB50/PT</b>	CB711
<b>CB50/PT (Ex)i</b>	CBX73
<b>POF/07 (PFX/07)</b>	POF07 (PFX07)
<b>150 / (150)</b>	
<b>POS/77</b>	POS77
<b>PMP/07</b>	PMP07
<b>CPM/07 (CPX/07)</b>	CPM07 (CPX07)
<b>DFU/5</b>	DU05..
<b>DFM/700</b>	DF700
<b>PSD/C</b>	PD003
<b>SDD/2</b>	DD002
-	-
-	-
-	-
<b>TUM/07</b> on 3 and on 4	TUM07
<b>PRP/8</b>	PRP08
<b>CNU/8/51</b>	NU0851
<b>CSC</b>	CS...
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005
-	-

Type	Cat. No.
<b>CB70/PT</b>	CB811
<b>CB70/PT (Ex)i</b>	CBX83
<b>POF/08 (PFX/08)</b>	POF08 (PFX08)
<b>192 / (155)</b>	
<b>POS/08</b>	POS08
<b>PMP/08</b>	PMP08
<b>CPM/08 (CPX/08)</b>	CPM08 (CPX08)
<b>DFU/6</b>	DU06..
<b>DFM/700</b>	DF700
<b>PSD/C</b>	PD003
<b>SDD/2</b>	DD002
-	-
-	-
-	-
<b>TUM/08</b> on 3 and on 4	TUM08
<b>PRP/8</b>	PRP08
<b>CNU/8/51</b>	NU0851
<b>CSC</b>	CS...
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005
-	-

# GPM Series high current terminal blocks

with UL94V-0 polyamide  
insulating body

- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- panel mount version available
- possibility to perform cross-connections
- available in /BB (bar-bar), /BC (bar-cable), /CC (cable-cable) versions
- available in beige RAL 1001 colour



**tightening reliability:** the reliability of the connection (cable-lugs or bars) is guaranteed by screw and nut clamping, with one flat and one spring washer, having the function of counteracting the effects of high dynamic stress. In the versions designed for the connection of conductors without special preparation, the reliability of the connection is assured by the special wrapping shape of the pressure plate. The spring reaction to the pressing force of the conductor works as a block under the head of the tightening screw, avoiding unloosening, even in presence of vibrations.

The conducting bar is also manufactured with an equivalent concave housing as to increase the clamping effectiveness on the conductors. In addition, the contact surfaces of both the pressure plate and the concave housing of the conducting busbar are provided, on their whole length, with cross grooving which improves the connection characteristics. The mechanical retention of the conductors guarantees low resistance of the resulting electrical contact.

**warning protection:** all the versions are contained in particularly articulated insulating bodies which guarantee an **IPXXB** degree of protection, without the need of any further accessory. Every insulating body, made in thermoplastic material, is manufactured in two specular half-shells which fit into each other by means of centring pins. In addition on the lower and internal part of the terminal block, eight embedding tabs give added safety to the terminal block itself. The side walls of the half-shells are stiffened and box like; this not only improves the aesthetic aspect of these large terminal blocks, but also guarantees improved stability and linearity to the entire installation. The different versions, obviously, have different but always innovative and original solutions to the problem of guaranteeing the IPXXB protection degree. In fact in appropriate seats inside the side walls of the half-shells the following may be inserted:


- **protection for the "bar" versions:** this protection, which in normal installation conditions is in a longitudinal position in respect to the axis of the terminal block, can be easily rotated with the simple aid of a screwdriver (as mentioned in the safety regulations). In this way, access can be guaranteed into the connection unit and for all the cable lugs or bars for tightening and loosening operations,
- **protection for the "cable" versions:** in this case the protection is fixed and has a click insertion. It is orthogonal to the axis of the terminal block and it protects the wire clamping collar, the pressure plate and the tightening screw.

This type of protection is provided with a "sliding gate" device, which is vertical to the terminal block protection and in line with the conductors insertion hole; it allows, with manual action with the best safety conditions, to close partially or totally the hole itself and to protect the live parts, when using conductors having a cross-section much lower than the rated one or when wiring the terminal block only on one side.

**mounting:** due to their large dimensions and as they bear high strain caused by the stress generated by the conductors, a new rail mounting system has been researched into and designed for them. These terminal blocks can be mounted on different types of rails (conf. to IEC 60715). The dismantling from the rail of the terminal block can take place with the aid of a simple screwdriver, inserted in the vent-hole of the mounting system itself (yellow part). If the rails themselves are to be installed on a straight wall, the size of GPM terminal blocks make the use of flat rail supports indispensable so that the terminals can be adequately distanced from the surface. For each terminal block, a /FIX version for the direct panel-mount is available.

**marking:** identification on both sides can be made on all the terminal blocks of GPM series, despite the size, with either CNU/8 type (2 elements) or CSC (up to 5 elements) marking tags. It is not necessary to use one or the other type: they can be used together.

**cross-connection:** with this series of products it is also possible to create a cross connection between two or three adjoining terminal blocks by using the appropriate jumper. The pre-cut diaphragm on the side wall of the insulating body must be removed before the insertion of this accessory. Even when the cross-connection is in place, the assembled terminal board provided with these accessories guarantees an IPXXB protection degree, without the need of any further cover.

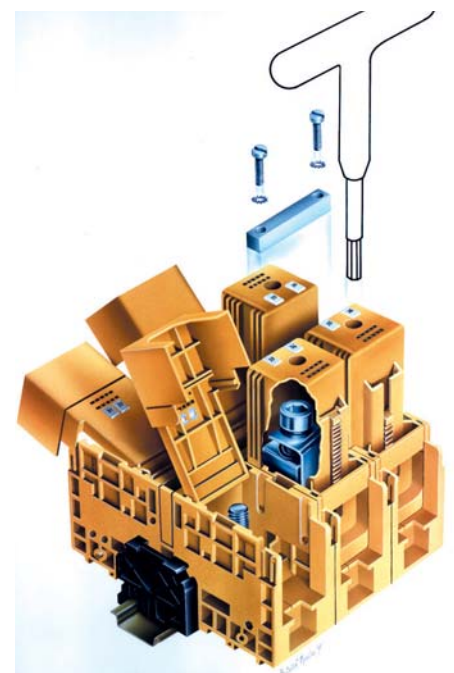

# GPM Series high current terminal blocks

with UL94V-0 polyamide  
insulating body

- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- panel-mount version available - M6 screw (screw with groove for screwdriver and washer recommended)
- possibility to perform parallel cross-connections
- available in beige RAL 1001 colour



standard version



panel-mount version

(\* distance between the cable lug fixing screw axis and the conducting body: 10 mm

(\* distance between the cable lug fixing screw axis and the conducting body: 12 mm

(\* distance between the cable lug fixing screw axis and the conducting body: 15 mm

standard version	
panel-mount version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
bars and/or cable lugs	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value –bar (test / recommended)	(Nm)
tightening torque value –cable (test / recommended)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32
height / width (fixing distance between centres) / thickness (panel-mount)	

GPM.95/BB		GPM.150/BB		GPM.240/BB	
Cat. No.	GP100	Cat. No.	GP400	Cat. No.	GP700
GPM.95/BB/FIX		GPM.150/BB/FIX		GPM.240/BB/FIX	
Cat. No.	GP110	Cat. No.	GP410	Cat. No.	GP710
feed-through	95	feed-through	150	feed-through	240
	-		-		-
	-		-		-
22 mm maximum width (M8 bolt) (*)		32 mm maximum width (M10 bolt) (*)		40 mm maximum width (M12 bolt) (*)	
1000 V / 269 A / -		1000 V / 353 A / -		1000 V / 452 A / -	
	-		-		-
12 KV / 3		12 KV / 3		12 KV / 3	
	-		-		-
6 / 9 (13 mm wrench)		10 / 15 (17 mm wrench)		14 / 21 (19 mm wrench)	
	-		-		-
81 / 176 / 32		81 / 200 / 42		89 / 250 / 52	
88 / 176 / 32		88 / 200 / 42		96 / 250 / 52	
85 / 176 / 32		85 / 200 / 42		93 / 250 / 52	
76 / 176 (158) / 32		76 / 200 (158) / 42		84 / 250 (172) / 52	

GPM.150/BB		GPM.240/BB	
Cat. No.	GP400	Cat. No.	GP700
GPM.150/BB/FIX		GPM.240/BB/FIX	
Cat. No.	GP410	Cat. No.	GP710
feed-through	150	feed-through	240
	-		-
	-		-
32 mm maximum width (M10 bolt) (*)		40 mm maximum width (M12 bolt) (*)	
1000 V / 353 A / -		1000 V / 452 A / -	
	-		-
12 KV / 3		12 KV / 3	
	-		-
10 / 15 (17 mm wrench)		14 / 21 (19 mm wrench)	
	-		-
81 / 200 / 42		89 / 250 / 52	
88 / 200 / 42		96 / 250 / 52	
85 / 200 / 42		93 / 250 / 52	
76 / 200 (158) / 42		84 / 250 (172) / 52	

GPM.240/BB		GPM.240/BB/FIX	
Cat. No.	GP700	Cat. No.	GP710
feed-through	240	feed-through	240
	-		-
	-		-
40 mm maximum width (M12 bolt) (*)		40 mm maximum width (M12 bolt) (*)	
1000 V / 452 A / -		1000 V / 452 A / -	
	-		-
12 KV / 3		12 KV / 3	
	-		-
14 / 21 (19 mm wrench)		14 / 21 (19 mm wrench)	
	-		-
89 / 250 / 52		89 / 250 / 52	
96 / 250 / 52		96 / 250 / 52	
93 / 250 / 52		93 / 250 / 52	
84 / 250 (172) / 52		84 / 250 (172) / 52	

## APPROVALS



UL, cUL, ATEX and IEC Ex pending



UL, cUL, ATEX and IEC Ex pending



UL, cUL, ATEX and IEC Ex pending

## ACCESSORIES

End sections	beige
Permanent cross connection	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Cover for cross-connection	
Mounting rail support	flat for PR/DIN and PR/3 inclined for PR/DIN and PR/3
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
-	-
POF/95/2 poles	P0952
POF/95/3 poles	P0953
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
ACI121213	Z121213
ACI121024	Z121024
CNU/8/51	NU0851
CSC	CS...
BTU for PR/DIN and PR/3	BT005
CDA/BT for PR/DIN only	CD003
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005


Type	Cat. No.
-	-
POF/150/2 poles	P0152
POF/150/3 poles	P0153
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
ACI121213	Z121213
ACI121024	Z121024
CNU/8/51	NU0851
CSC	CS...
BTU for PR/DIN and PR/3	BT005
CDA/BT for PR/DIN only	CD003
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
-	-
POF/240/2 poles	P0242
POF/240/3 poles	P0243
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
ACI121213	Z121213
ACI121024	Z121024
CNU/8/51	NU0851
CSC	CS...
BTU for PR/DIN and PR/3	BT005
CDA/BT for PR/DIN only	CD003
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

# GPM Series high current terminal blocks

with UL94V-0 polyamide  
insulating body

- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- panel-mount version available - M6 screw (screw with groove for screwdriver and washer recommended)
- possibility to perform parallel cross-connections
- available in beige RAL 1001 colour

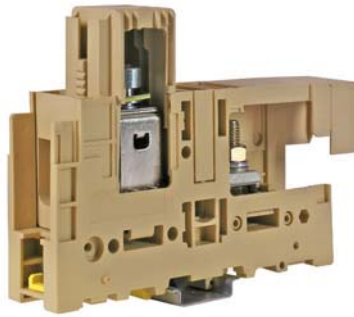

standard version



panel-mount version

standard version	GPM.95/BC Cat. No. GP200	GPM.150/BC Cat. No. GP500	GPM.240/BC Cat. No. GP800
panel-mount version	GPM.95/BC/FIX Cat. No. GP210	GPM.150/BC/FIX Cat. No. GP510	GPM.240/BC/FIX Cat. No. GP810
TECHNICAL CHARACTERISTICS			
function / type	feed-through	feed-through	feed-through
rated cross-section (mm <sup>2</sup> )	95	150	240
connecting capacity			
flexible (mm <sup>2</sup> )	35 ÷ 120	50 ÷ 185	95 ÷ 300
rigid (mm <sup>2</sup> )	25 ÷ 120	35 ÷ 185	95 ÷ 300
bars and/or cable lugs	22 mm maximum width (M8 bolt)	32 mm maximum width (M10 bolt)	40 mm maximum width (M12 bolt)
rated voltage / rated current / gauge	1000 V / 269 A / B12	1000 V / 353 A / B14	1000 V / 452 A / B16
rated voltage / rated current / AWG	-	-	-
rated impulse withstand voltage / pollution degree	12 KV / 3	12 KV / 3	12 KV / 3
insulation stripping length (mm)	35	35	43
tightening torque value –bar (test / recommended) (Nm)	6 / 9 (13 mm wrench)	10 / 15 (17 mm wrench)	14 / 21 (19 mm wrench)
tightening torque value –cable (test / recommended) (Nm)	6 / 9 (Allen screw, 6 mm wrench)	10 / 15 (Allen screw, 8 mm wrench)	14 / 21 (Allen screw, 8 mm wrench)
height / width / thickness TH/35 7,5 mm	113 / 158 / 32	134 / 170 / 42	150 / 202 / 52
height / width / thickness TH/35 15 mm	120 / 158 / 32	141 / 170 / 42	157 / 202 / 52
height / width / thickness G32	117 / 158 / 32	138 / 170 / 42	154 / 202 / 52
height / width (fixing distance between centres) / thickness (panel-mount)	108 / 175 (158) / 32	129 / 187 (158) / 42	144 / 219 (172) / 52
UL, cUL, ATEX and IEC Ex pending			
APPROVALS			
ACCESSORIES			
End sections	beige	-	-
Permanent cross connection	POF/95/2 poles P0952 POF/95/3 poles P0953	POF/150/2 poles P0152 POF/150/3 poles P0153	POF/240/2 poles P0242 POF/240/3 poles P0243
Switchable cross connection	-	-	-
Multiple common bar	250 mm	-	-
Shunting screw and sleeve	-	-	-
Coloured partition	red, green, white	-	-
Cross connection barrier	red	-	-
Test plug socket	-	-	-
Test plug	-	-	-
Numbering strip	-	-	-
Cover for cross-connection	-	-	-
Mounting rail support	flat for PR/DIN and PR/3 inclined for PR/DIN and PR/3	ACI121213 Z121213 ACI121024 Z121024	ACI121213 Z121213 ACI121024 Z121024
Marking tag	CNU/8/51 NU0851 CSC CS...	CNU/8/51 NU0851 CSC CS...	CNU/8/51 NU0851 CSC CS...
End bracket	BTU for PR/DIN and PR/3 BT005 CDA/BT for PR/DIN only CD003 BT/3-BTO for PR/3 only BT003-BT007	BTU for PR/DIN and PR/3 BT005 CDA/BT for PR/DIN only CD003 BT/3-BTO for PR/3 only BT003-BT007	BTU for PR/DIN and PR/3 BT005 CDA/BT for PR/DIN only CD003 BT/3-BTO for PR/3 only BT003-BT007
Mounting rail according to IEC 60715 Std.	PR/DIN/AC of steel PR001 PR/DIN/AS same with slots PR004 PR/DIN/AL of aluminium PR002 PR/3/AC of steel PR003 PR/3/AS same with slots PR005	PR/DIN/AC of steel PR001 PR/DIN/AS same with slots PR004 PR/DIN/AL of aluminium PR002 PR/3/AC of steel PR003 PR/3/AS same with slots PR005	PR/DIN/AC of steel PR001 PR/DIN/AS same with slots PR004 PR/DIN/AL of aluminium PR002 PR/3/AC of steel PR003 PR/3/AS same with slots PR005




# GPM Series high current terminal blocks

with UL94V-0 polyamide  
insulating body

- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- panel-mount version available - M6 screw (screw with groove for screwdriver and washer recommended)
- possibility to perform parallel cross-connections
- available in beige RAL 1001 colour




standard version

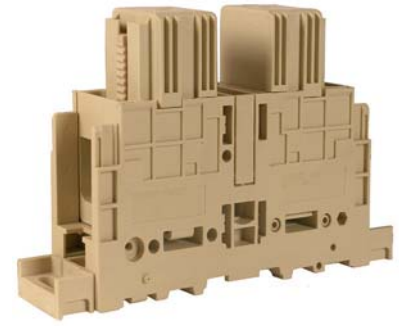

panel-mount version

standard version	GPM.95/CC Cat. No. GP300	GPM.150/CC Cat. No. GP600	GPM.240/CC Cat. No. GP900			
panel-mount version	GPM.95/CC/FIX Cat. No. GP310	GPM.150/CC/FIX Cat. No. GP610	GPM.240/CC/FIX Cat. No. GP910			
TECHNICAL CHARACTERISTICS						
function / type	feed-through	feed-through	feed-through			
rated cross-section (mm <sup>2</sup> )	95	150	240			
connecting capacity						
flexible (mm <sup>2</sup> )	35 ÷ 120	50 ÷ 185	95 ÷ 300			
rigid (mm <sup>2</sup> )	25 ÷ 120	35 ÷ 185	95 ÷ 300			
bars and/or cable lugs	22 mm maximum width (M8 bolt)	32 mm maximum width (M10 bolt)	40 mm maximum width (M12 bolt)			
rated voltage / rated current / gauge	1000 V / 269 A / B12	1000 V / 353 A / B14	1000 V / 452 A / B16			
rated voltage / rated current / AWG	-	-	-			
rated impulse withstand voltage / pollution degree	12 KV / 3	12 KV / 3	12 KV / 3			
insulation stripping length (mm)	-	-	-			
tightening torque value –bar (test / recommended) (Nm)	-	-	-			
tightening torque value –cable (test / recommended) (Nm)	6 / 9 (Allen screw, 6 mm wrench)	10 / 15 (Allen screw, 8 mm wrench)	14 / 21 (Allen screw, 8 mm wrench)			
height / width / thickness	113 / 140 / 32	134 / 140 / 42	150 / 154 / 52			
height / width / thickness	120 / 140 / 32	141 / 140 / 42	157 / 154 / 52			
height / width / thickness	117 / 140 / 32	138 / 140 / 42	154 / 154 / 52			
height / width (fixing distance between centres) / thickness (panel-mount)	108 / 173 (158) / 32	129 / 173 (158) / 42	144 / 187 (172) / 52			
UL, cUL, ATEX and IEC Ex pending						
APPROVALS	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
End sections	-	-	-	-	-	-
Permanent cross connection	POF/95/2 poles P0952 POF/95/3 poles P0953		POF/150/2 poles P0152 POF/150/3 poles P0153		POF/240/2 poles P0242 POF/240/3 poles P0243	
Switchable cross connection	-	-	-	-	-	-
Multiple common bar	-	-	-	-	-	-
Shunting screw and sleeve	-	-	-	-	-	-
Coloured partition	-	-	-	-	-	-
Cross connection barrier	-	-	-	-	-	-
Test plug socket	-	-	-	-	-	-
Test plug	-	-	-	-	-	-
Numbering strip	-	-	-	-	-	-
Cover for cross-connection	-	-	-	-	-	-
Mounting rail support	ACI121213 Z121213 ACI121024 Z121024		ACI121213 Z121213 ACI121024 Z121024		ACI121213 Z121213 ACI121024 Z121024	
Marking tag	CNU/8/51 NU0851 CSC CS...		CNU/8/51 NU0851 CSC CS...		CNU/8/51 NU0851 CSC CS...	
End bracket	BTU for PR/DIN and PR/3 BT005 CDA/BT for PR/DIN only CD003 BT/3-BTO for PR/3 only BT003-BT007		BTU for PR/DIN and PR/3 BT005 CDA/BT for PR/DIN only CD003 BT/3-BTO for PR/3 only BT003-BT007		BTU for PR/DIN and PR/3 BT005 CDA/BT for PR/DIN only CD003 BT/3-BTO for PR/3 only BT003-BT007	
Mounting rail according to IEC 60715 Std.	PR/DIN/AC of steel PR001 PR/DIN/AS same with slots PR004 PR/DIN/AL of aluminium PR002 PR/3/AC of steel PR003 PR/3/AS same with slots PR005		PR/DIN/AC of steel PR001 PR/DIN/AS same with slots PR004 PR/DIN/AL of aluminium PR002 PR/3/AC of steel PR003 PR/3/AS same with slots PR005		PR/DIN/AC of steel PR001 PR/DIN/AS same with slots PR004 PR/DIN/AL of aluminium PR002 PR/3/AC of steel PR003 PR/3/AS same with slots PR005	

# ACB Series high current terminal blocks with UL94V-0 polyamide insulating body

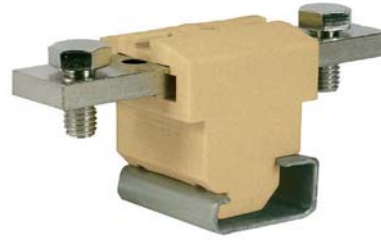

- to be mounted onto PR/DIN type rails according to IEC 60715 Std., "G32" type
- available in beige RAL 1001 colour

(\*) referred to version equipped with wire clamping collar  
(\*\*) tightening with screwdriver / wrench

When using bars or lugs having a width exceeding the indicated value (up to a maximum of 34 mm) the use of SPS separating diaphragms is necessary in order to guarantee the appropriate insulation.

beige version	ACB.70/BB Cat. No. AC100	ACB.120/BB Cat. No. AC400	ACB.185/BB Cat. No. AC700
(Ex)i version			
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	feed-through	feed-through	feed-through
rated cross-section (mm <sup>2</sup> )	70	120	185
connecting capacity (*)			
flexible (mm <sup>2</sup> )	10 ÷ 120	25 ÷ 185	25 ÷ 185
rigid (mm <sup>2</sup> )	6 ÷ 120	25 ÷ 185	25 ÷ 185
bars and/or cable lugs	25 mm maximum width (M6 bolt)	25 mm maximum width (M8 bolt)	25 mm maximum width (M12 bolt)
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 192 A / -	800 V / 269 A / -	800 V / 353 A / -
rated voltage / rated current / AWG	-	-	-
rated impulse withstand voltage / pollution degree	8 KV / 3	8 KV / 3	8 KV / 3
insulation stripping length (mm)	-	-	-
tightening torque value / bar (Nm)	- / 3 (10 mm wrench)	- / 6 (13 mm wrench)	- / 14 (19 mm wrench)
tightening torque value / cable (**) (Nm)	-	-	-
height / width / thickness	45 / 90 / 35	46 / 100 / 35	47 / 120 / 35
	Referred to the versions equipped with clamping collar on both sides	Referred to the versions equipped with clamping collar on both sides	Referred to the versions equipped with clamping collar on both sides
<b>APPROVALS</b>			
<b>ACCESSORIES</b>			
Spare clamping collar (to allow the connection of non pre-assembled cables)	<b>ACB.70/CO</b> AC104	<b>ACB.120/CO</b> AC404	<b>ACB.185/CO</b> AC705
Safety cover	<b>PRT/P</b> PRT01	<b>PRT/P</b> PRT01	<b>PRT/P</b> PRT01
Cover support	<b>PRT/G</b> PRT03	<b>PRT/G</b> PRT03	<b>PRT/G</b> PRT03
Marking tag printed or blank	<b>SPS/1</b> SPS01	<b>SPS/1</b> SPS01	<b>SPS/3</b> SPS03
End bracket	<b>CNU/8/51</b> NU0851	<b>CNU/8/51</b> NU0851	<b>CNU/8/51</b> NU0851
	<b>CSC</b> (with ADR adapter) CS...	<b>CSC</b> (with ADR adapter) CS...	<b>CSC</b> (with ADR adapter) CS...
	<b>BTU</b> for PR/DIN and PR/3 BT005	<b>BTU</b> for PR/DIN and PR/3 BT005	<b>BTU</b> for PR/DIN and PR/3 BT005
	<b>CDA/BT</b> for PR/DIN only CD003	<b>CDA/BT</b> for PR/DIN only CD003	<b>CDA/BT</b> for PR/DIN only CD003
Mounting rail according to IEC 60715 Std.	<b>PR/DIN/AC</b> of steel PR001	<b>PR/DIN/AC</b> of steel PR001	<b>PR/DIN/AC</b> of steel PR001
	<b>PR/DIN/AS</b> same with slots PR004	<b>PR/DIN/AS</b> same with slots PR004	<b>PR/DIN/AS</b> same with slots PR004
	<b>PR/DIN/AL</b> of aluminium PR002	<b>PR/DIN/AL</b> of aluminium PR002	<b>PR/DIN/AL</b> of aluminium PR002

**protection:** ACB terminal blocks can be protected against direct and/or accidental contact by means of proper **PRT** type covers of different sizes: small, medium or big in self-extinguishing transparent material. These covers are supplied in standard length of 200 mm (corresponding to the total width of 4 adjoining blocks) and must be inserted on **SPS** supports, also in self-extinguishing material. PRT covers allow the protection of one side of the terminal block; the complete protection of the terminal board is obtained by two covers, which overlap.

### PRT/P+SPS/1

- for ACB.70/BB and ACB.120/BB

### PRT/M+SPS/5

- for ACB.70 and ACB.120 with clamping collar mounted


### PRT/P+SPS/3

- for ACB.185/BB

### PRT/M+SPS/7


- for ACB.185 with clamping collar mounted

**PRT/G** type must be used when the conductors come from the back of the board or, otherwise, when one or more connection points, not used, must be nevertheless protected.



# MBL Series stud-type terminal blocks with UL94V-0 polyamide insulating body

- stud connection, for cable lugs
- to be mounted onto PR/DIN type rails according to IEC 60715 Std., "G32" type
- available in beige RAL 1001 colour

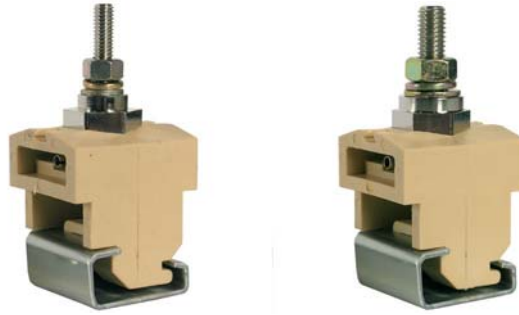

beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
stud diameter / key / locking bolt wrench	
max lug overlapping connection height	(mm)
torque value	
rated voltage / rated current	sec. IEC 60947-7-1
rated voltage / rated current / AWG	UL
rated impulse withstand voltage / pollution degree	
maximum connectable width	(mm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

## APPROVALS



ACCESSORIES	
Partition	
Cover support	
Safety cover	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

MBL.50/6	
Cat. No.	MB100
for cable lugs	
50	
30 ÷ 50	
30 ÷ 70	
M 6 / M 10 / M 19	
15,3	
3	
800 V / 150 A	
600 V / 150 A / -	
8 kV / 3	
30	
-	
79 / 39 / 35	

Type	Cat. No.
DUS/1	DUS01
SPS/5	SPS05
PRT/P	PRT01
CNU/8/51	NU0851
-	-
CDA/BT	CD003
-	-
-	-
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	-
-	-

MBL.95/8	
Cat. No.	MB200
for cable lugs	
95	
30 ÷ 95	
30 ÷ 120	
M 8 / M 13 / M 19	
13	
6	
800 V / 232 A	
600 V / 200 A / -	
8 kV / 3	
30	
-	
79 / 39 / 35	

Type	Cat. No.
DUS/1	DUS01
SPS/5	SPS05
PRT/P	PRT01
CNU/8/51	NU0851
-	-
CDA/BT	CD003
-	-
-	-
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	-
-	-

Stud terminal blocks suitable for the connection of bars or cable lugs, 30 mm max. width, to be mounted on PR/DIN type rails. **DUS/1** and **DUS/3** type barriers are provided to ensure the correct insulation distance between the different phases.


Whenever a safety cover is needed, the insulation function is guaranteed by the **SPS/5** support of the cover itself.



# MBL Series stud-type terminal blocks

with UL94V-0 polyamide insulating body

- stud connection, for cable lugs
- to be mounted onto PR/DIN type rails according to IEC 60715 Std., "G32" type
- available in beige RAL 1001 colour

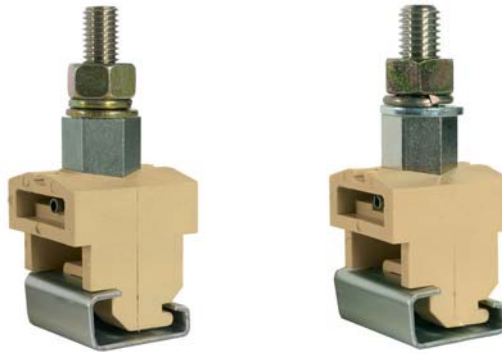

beige version	MBL.120/10 Cat. No. MB300	MBL.150/12 Cat. No. MB400
(Ex)i version		
<b>TECHNICAL CHARACTERISTICS</b>		
function / type	for cable lugs	for cable lugs
rated cross-section (mm <sup>2</sup> )	120	150
connecting capacity		
flexible (mm <sup>2</sup> )	30 ÷ 120	30 ÷ 150
rigid (mm <sup>2</sup> )	30 ÷ 150	30 ÷ 185
stud diameter / key / locking bolt wrench	M 10 / M 13 / M 19	M 12 / M 19 / M 19
max lug overlapping connection height (mm)	13	15,8
torque value	10	14
rated voltage / rated current sec. IEC 60947-7-1	800 V / 269 A	800 V / 309 A
rated voltage / rated current / AWG UL	600 V / 230 A / -	600 V / 285 A / -
rated impulse withstand voltage / pollution degree	8 kV / 3	8 kV / 3
maximum connectable width (mm)	30	30
height / width / thickness	-	-
height / width / thickness	-	-
height / width / thickness	90 / 39 / 35	90 / 39 / 35
<b>APPROVALS</b>		
<b>ACCESSORIES</b>	<b>Type</b> <b>Cat. No.</b>	<b>Type</b> <b>Cat. No.</b>
Partition	<b>DUS/3</b> DUS03	<b>DUS/3</b> DUS03
Cover support	<b>SPS/5</b> SPS05	<b>SPS/5</b> SPS05
Safety cover	<b>PRT/P</b> PRT01	<b>PRT/P</b> PRT01
Marking tag      printed or blank	<b>CNU/8/51</b> NU0851	<b>CNU/8/51</b> NU0851
End bracket	<b>CDA/BT</b> CD003	<b>CDA/BT</b> CD003
Mounting rail according to IEC 60715 Std.	<b>PR/DIN/AC</b> of steel      PR001	<b>PR/DIN/AC</b> of steel      PR001
	<b>PR/DIN/AS</b> same with slots      PR004	<b>PR/DIN/AS</b> same with slots      PR004
	<b>PR/DIN/AL</b> of aluminium      PR002	<b>PR/DIN/AL</b> of aluminium      PR002
	-	-
	-	-

# Earth terminal blocks

with **UL94V-0 polyamide insulating body**

- to be mounted onto PR/DIN type rails according to IEC 60715 Std., TH/35 and "G32" types
- in a single green / yellow insulating case
- **CESI 02 ATEX 061 U** Ex e certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +80 °C
- **CoC IEC Ex CES 09.0009U** Ex e II



Version to be mounted onto PR/3 and PR/DIN rails according to IEC 60715 Std.

(\*) with reference to upper and lower clamping units respectively

version to be mounted onto PR/3 rail	TE0.2	CBE.2	TE0.4			
	Cat. No. <b>T0910</b>	Cat. No. <b>CE110</b>	Cat. No. <b>T0430</b>			
version to be mounted onto PR/DIN rail						
TECHNICAL CHARACTERISTICS						
function / type	earth	earth (2 inputs / 2 outputs)	earth			
rated cross-section (mm <sup>2</sup> )	2,5	2,5	4			
connecting capacity						
flexible (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4	0,2 ÷ 6			
rigid (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4	0,2 ÷ 6			
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14	2,5 - WP25/14	4 - WP40/16			
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / - / A3	- / - / A3	- / - / A4			
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	- / - / 20-14 AWG / 5,5 lb.in.	- / 15 A / 20 ÷ 14 AWG / 5,5 lb.in.	- / - / 20 ÷ 12 AWG / 5,5 lb.in.			
rated impulse withstand voltage / pollution degree	8 KV / 3	8 KV / 3	8 KV / 3			
insulation stripping length (mm)	12	8 - 14,5 (*)	14			
tightening torque value (test / max) (Nm)	0,4 / 0,8	0,4 / 0,8	0,5 / 1,2			
height / width / thickness TH/35 7,5 mm	47 / 50 / 5,5	52 / 50 / 5	52 / 50 / 6,5			
height / width / thickness TH/35 15 mm	55 / 50 / 5,5	60 / 50 / 5	60 / 50 / 6,5			
height / width / thickness G32	-	56 / 50 / 5	-			
<b>APPROVALS</b>						
ACCESSORIES	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
End sections	<b>TE0.2/PT</b>	T0911	<b>CBR/PT</b>	CR111	<b>TE0.4/PT</b>	T0431
Marking tag	<b>CNU/8/51</b>	NU0851	<b>CNU/8/51</b>	NU0851	<b>CNU/8/51</b>	NU0851
Numbering strip	<b>CSC</b>	CS...	<b>CSC</b>	CS...	<b>CSC</b>	CS...
End bracket	-		<b>CNU/8/51</b>	NU0851	-	
Mounting rail according to IEC 60715 Std.	<b>BTU</b> for PR/DIN and PR/3	BT005	<b>BTU</b> for PR/DIN and PR/3	BT005	<b>BTU</b> for PR/DIN and PR/3	BT005
	<b>BT/3-BTO</b> for PR/3 only	BT003-BT007	<b>BT/3-BTO</b> for PR/3 only	BT003-BT007	<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
	<b>BT/DIN/PO</b> for PR/DIN only	BT001	<b>BT/DIN/PO</b> for PR/DIN only	BT001		
	<b>PR/DIN/AS</b> of steel	PR001	<b>PR/DIN/AS</b> of steel	PR001		
	<b>PR/DIN/AS</b> same with slots	PR004	<b>PR/DIN/AS</b> same with slots	PR004		
	<b>PR/DIN/AL</b> of aluminium	PR002	<b>PR/DIN/AL</b> of aluminium	PR002		
	<b>PR/3/AC</b> of steel	PR003	<b>PR/3/AC</b> of steel	PR003	<b>PR/3/AC</b> of steel	PR003
	<b>PR/3/AS</b> same with slots	PR005	<b>PR/3/AS</b> same with slots	PR005	<b>PR/3/AS</b> same with slots	PR005

MAXIMUM SHORT-TIME WITHSTAND CURRENTS ALLOCATED TO THE RAIL PROFILE				
Rail profile	Material	Equivalent E-cu cross-section mm <sup>2</sup>	Short-time withstand current 1 s kA	Thermal rated current of a PEN busbar A
"Top hat" rail IEC 60715/TH 15 - 5,5	Steel	10	1,2	-
	Copper	25	3	101
	Aluminium	16	1,92	76
G32-type rail IEC 60715/G32	Steel	35	4,2	-
	Copper	120	14,4	269
	Aluminium	70	8,4	192
"Top hat" rail IEC 60715/TH 35 - 7,5	Steel	16	1,92	-
	Copper	50	6	150
	Aluminium	35	4,2	125
"Top hat" rail IEC 60715/TH 35 - 15	Steel	50	6	-
	Copper	150	18	309
	Aluminium	95	11,4	232

Taken from CEI EN 60947-7-2 standard

# Earth terminal blocks

with UL94V-0 polyamide insulating body

- to be mounted onto PR/3 type rails according to IEC 60715 Std., TH/35 type
- to be mounted onto PR/DIN type rails according to IEC 60715 Std., "G32" type
- in 2 green / yellow insulating cases
- **CESI 02 ATEX 061 U** Ex e (Ex) certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +80 °C
- **CoC IEC Ex CES 09.0009U** Ex e II



**version to be mounted onto PR/3 rail**

**version to be mounted onto PR/DIN rail**

TECHNICAL CHARACTERISTICS	
function / type	earth
rated cross-section (mm <sup>2</sup> )	4
connecting capacity	
flexible (mm <sup>2</sup> )	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / - / A4
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	- / - / 20-12 AWG / 5,5 lb.in.
rated impulse withstand voltage / pollution degree	-
insulation stripping length (mm)	8 KV / 3
tightening torque value (test / max) (Nm)	10
height / width / thickness TH/35 7,5 mm	0,5 / 1,2
height / width / thickness TH/35 15 mm	-
height / width / thickness G32	56 / 50 / 6,5

TED.4	
Cat. No.	TE400

TE.6/0	
Cat. No.	T0110
Cat. No.	TE110



TE.6/0	
Cat. No.	T0110
Cat. No.	TE110

TE.6/D	
Cat. No.	T0110
Cat. No.	TE110



TE.10/0	
Cat. No.	T0500
Cat. No.	TE500

TE.10/D	
Cat. No.	T0500
Cat. No.	TE500



## APPROVALS

ACCESSORIES	
End sections	verde
Marking tag	printed or blank
Numbering strip	
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
TEO.4/PT	T0431
CNU/8/51	NU0851
CSC	CS...
BTU for PR/DIN and PR/3	BT005
BT/3-BTO for PR/3 only	BT003-BT007
BT/DIN/PO for PR/DIN only	BT001
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002

Type	Cat. No.
-	-
CNU/8/51	NU0851
CSC	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
-	-
CNU/8/51	NU0851
CSC	CS...
BTU for PR/DIN and PR/3	BT005
BT/3-BTO for PR/3 only	BT003-BT007
BT/DIN/PO for PR/DIN only	BT001
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

## MAXIMUM SHORT-TIME WITHSTAND CURRENTS ALLOCATED TO THE RAIL PROFILE


Rail profile	Material	Equivalent E-cu cross-section mm <sup>2</sup>	Short-time withstand current 1 s kA	Thermal rated current of a PEN busbar A
"Top hat" rail IEC 60715/TH 15 - 5,5	Steel	10	1,2	-
	Copper	25	3	101
	Aluminium	16	1,92	76
G32-type rail IEC 60715/G32	Steel	35	4,2	-
	Copper	120	14,4	269
	Aluminium	70	8,4	192
"Top hat" rail IEC 60715/TH 35 - 7,5	Steel	16	1,92	-
	Copper	50	6	150
	Aluminium	35	4,2	125
"Top hat" rail IEC 60715/TH 35 - 15	Steel	50	6	-
	Copper	150	18	309
	Aluminium	95	11,4	232

Taken from  
CEI EN 60947-2  
standard

# Earth terminal blocks

with UL94V-0 polyamide insulating body

- to be mounted onto PR/3 type rails according to IEC 60715 Std., TH/35 type
- to be mounted onto PR/DIN type rails according to IEC 60715 Std., "G32" type
- in 2 green / yellow insulating cases
- **CESI 02 ATEX 061 U** Ex e (Ex) certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +80 °C
- **CoC IEC Ex CES 09.0009U** Ex e II

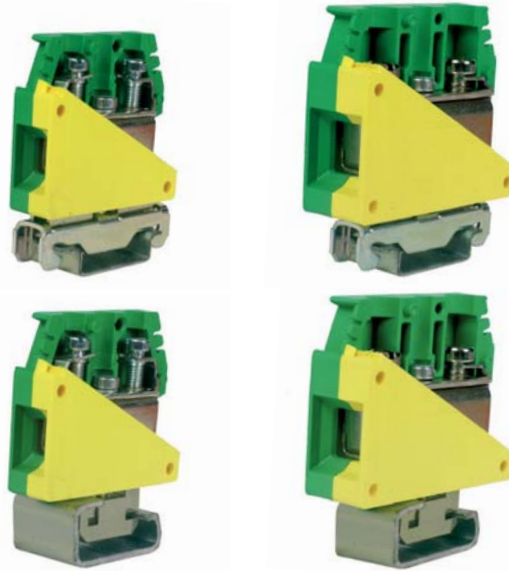

Without green / yellow insulating case



**version to be mounted onto PR/3 rail**

**version to be mounted onto PR/DIN rail**

TECHNICAL CHARACTERISTICS	
function / type	earth
rated cross-section (mm <sup>2</sup> )	16
connecting capacity	
flexible (mm <sup>2</sup> )	0,5 ÷ 25
rigid (mm <sup>2</sup> )	0,5 ÷ 25
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	16 - WP160/22
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / 76 A / B7
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	- / - / 20-3 AWG / 13,3 lb.in
rated impulse withstand voltage / pollution degree	8 kV / 3
insulation stripping length (mm)	13
tightening torque value (test / max) (Nm)	1,8 / 3
height / width / thickness TH/35 7,5 mm	56 / 47 / 12
height / width / thickness TH/35 15 mm	64 / 47 / 12
height / width / thickness G32	57,5 / 46,5 / 12

**TE.16/O** Cat. No. **T0210**

**TE.16/D** Cat. No. **TE210**

earth	50
connecting capacity	
flexible (mm <sup>2</sup> )	1,5 ÷ 50
rigid (mm <sup>2</sup> )	1 ÷ 70
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	50 - WP500/40
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / 125 A / B9
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	- / - / 16-1 AWG / 33,2 lb.in
rated impulse withstand voltage / pollution degree	8 kV / 3
insulation stripping length (mm)	17
tightening torque value (test / max) (Nm)	2,5 / 5
height / width / thickness TH/35 7,5 mm	62 / 57 / 18
height / width / thickness TH/35 15 mm	70 / 57 / 18
height / width / thickness G32	63 / 57 / 18

**TE.50/O** Cat. No. **T0310**

**TE.50/D** Cat. No. **TE310**

earth	35
connecting capacity	
flexible (mm <sup>2</sup> )	1,5 ÷ 50
rigid (mm <sup>2</sup> )	1 ÷ 70
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	35 - WP350/30
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / 125 A / B9
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	- / - / -
rated impulse withstand voltage / pollution degree	- / 3
insulation stripping length (mm)	15
tightening torque value (test / max) (Nm)	2,5 / 5
height / width / thickness TH/35 7,5 mm	-
height / width / thickness TH/35 15 mm	-
height / width / thickness G32	60 + D / 58 / 11

**TTN.35** Cat. No. **TT300**

earth	35
connecting capacity	
flexible (mm <sup>2</sup> )	1,5 ÷ 50
rigid (mm <sup>2</sup> )	1 ÷ 70
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	35 - WP350/30
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / 125 A / B9
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	- / - / -
rated impulse withstand voltage / pollution degree	- / 3
insulation stripping length (mm)	15
tightening torque value (test / max) (Nm)	2,5 / 5
height / width / thickness TH/35 7,5 mm	-
height / width / thickness TH/35 15 mm	-
height / width / thickness G32	60 + D / 58 / 11

## APPROVALS



## ACCESSORIES

End sections	verde
Marking tag	printed or blank
Numbering strip	
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
CNU/8/51	NU0851
CSC	CS...
BTU for PR/DIN and PR/3	BT005
BT/3-BTO for PR/3 only	BT003-BT007
BT/DIN/PO for PR/DIN only	BT001
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002

Type	Cat. No.
CNU/8/51	NU0851
CSC	CS...
BTU for PR/DIN and PR/3	BT005
BT/3-BTO for PR/3 only	BT003-BT007
BT/DIN/PO for PR/DIN only	BT001
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
CNU/8/51	NU0851
CSC	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002

## MAXIMUM SHORT-TIME WITHSTAND CURRENTS ALLOCATED TO THE RAIL PROFILE

Rail profile	Material	Equivalent E-cu cross-section mm <sup>2</sup>	Short-time withstand current 1 s kA	Thermal rated current of a PEN busbar A
"Top hat" rail IEC 60715/TH 15 - 5,5	Steel	10	1,2	-
	Copper	25	3	101
	Aluminium	16	1,92	76
G32-type rail IEC 60715/G32	Steel	35	4,2	-
	Copper	120	14,4	269
	Aluminium	70	8,4	192
"Top hat" rail IEC 60715/TH 35 - 7,5	Steel	16	1,92	-
	Copper	50	6	150
	Aluminium	35	4,2	125
"Top hat" rail IEC 60715/TH 35 - 15	Steel	50	6	-
	Copper	150	18	309
	Aluminium	95	11,4	232

Taken from  
CEI EN 60947-7-2  
standard

# On two levels

## with UL94V-0 polyamide insulating body

- feed-through
- feed-through, equipped with internal cross-connection
- available in standard (grey RAL 7042 and beige RAL 1001 colours) or (Ex)i “intrinsic safety” circuits (blue RAL 5015 colour) versions
- to be mounted onto PR/3 according to IEC 60715 Std., “TH/35” type



PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING
Insulation voltage in the above configurations (V)					
630	500	250 V (*) 630 V (**)	500	500	

(\*) between lower levels (with partition)  
 (\*\*) between upper levels (with partition)  
 (\*\*\*) value referred to the characteristics of the terminal block alone, within the temperature range according to IEC 60947-7-1 Std.

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
max current (***)	
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm

<b>DBC.2/GR</b>	Cat. No. <b>DB100GR</b>
<b>DBC.2</b>	Cat. No. <b>DB100</b>
<b>DBC.2 (Ex)i</b>	Cat. No. <b>DB200</b>
2 level feed-through	2 level feed-through with internal cross-connection
2,5	2,5
0,2 ÷ 4	0,2 ÷ 4
0,2 ÷ 4	0,2 ÷ 4
2,5 - WP25/14	2,5 - WP25/14
630 V / 24 A / A3	630 V / 24 A / A3
600 V / 20 A / 28-12 AWG / 8 lb.in	600 V / 20 A / 28-12 AWG / 8 lb.in
27 A (2,5 mm <sup>2</sup> ) / 34 A (4 mm <sup>2</sup> )	27 A (2,5 mm <sup>2</sup> ) / 34 A (4 mm <sup>2</sup> )
-	-
8 KV / 3	8 KV / 3
9	9
0,4 / 0,8	0,4 / 0,8
66 / 70 / 5	66 / 70 / 5
74 / 70 / 5	74 / 70 / 5

<b>DBC.2/CI/GR</b>	Cat. No. <b>DB117GR</b>
<b>DBC.2/CI</b>	Cat. No. <b>DB117</b>
2 level feed-through with internal cross-connection	2 level feed-through with internal cross-connection
2,5	2,5
0,2 ÷ 4	0,2 ÷ 4
0,2 ÷ 4	0,2 ÷ 4
2,5 - WP25/14	2,5 - WP25/14
630 V / 24 A / A3	630 V / 24 A / A3
600 V / 20 A / 28-12 AWG / 8 lb.in	600 V / 20 A / 28-12 AWG / 8 lb.in
27 A (2,5 mm <sup>2</sup> ) / 34 A (4 mm <sup>2</sup> )	27 A (2,5 mm <sup>2</sup> ) / 34 A (4 mm <sup>2</sup> )
-	-
8 KV / 3	8 KV / 3
9	9
0,4 / 0,8	0,4 / 0,8
66 / 70 / 5	66 / 70 / 5
74 / 70 / 5	74 / 70 / 5

### APPROVALS



### ACCESSORIES

End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier (upper level)	red
Cross connection barrier (lower level)	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>DBC/PT/GR</b>	DB101GR
<b>DBC/PT</b>	DB101
<b>DBC/PT (Ex)i</b>	DB201
<b>PTC/2/02</b> poles	PTC0202
<b>PTC/2/03</b> poles	PTC0203
<b>PTC/2/05</b> poles	PTC0205
<b>PTC/2/10</b> poles	PTC0210
<b>PTC/2/00</b> (50 poles)	PTC0200
<b>24</b>	
<b>PTC/SP</b>	PTC0990
-	-
<b>DFU/7</b>	DU07..
<b>DFM/800 - DFM/900</b>	DF800-900
<b>DFM/500</b>	DF500
-	-
<b>CNU/8/51</b>	NU0851
-	-
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
-	-
<b>PR/3/AC</b> for PR/DIN and PR/3	PRO03
<b>PR/3/AS</b> same with slots	PRO05

Type	Cat. No.
<b>DBC/PT/GR</b>	DB101GR
<b>DBC/PT</b>	DB101
<b>DBC/PT (Ex)i</b>	DB201
<b>PTC/2/02</b> poles	PTC0202
<b>PTC/2/03</b> poles	PTC0203
<b>PTC/2/05</b> poles	PTC0205
<b>PTC/2/10</b> poles	PTC0210
<b>PTC/2/00</b> (50 poles)	PTC0200
<b>24</b>	
<b>PTC/SP</b>	PTC0990
-	-
<b>DFU/7</b>	DU07..
<b>DFM/800 - DFM/900</b>	DF800-900
<b>DFM/500</b>	DF500
-	-
<b>CNU/8/51</b>	NU0851
-	-
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
-	-
<b>PR/3/AC</b> for PR/DIN and PR/3	PRO03
<b>PR/3/AS</b> same with slots	PRO05



# On two levels

## with UL94V-0 polyamide insulating body



- feed-through
- feed-through, equipped with internal cross-connection
- available in standard (grey RAL 7042 and beige RAL 1001 colours) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions
- universal mounting onto IEC 60715 rails
- DAS.4 terminal block **CESI 03 ATEX 162 U Ex e** certificate I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C

- when rail assemblies are to be manufactured for potentially explosive environments (Ex e) please refer to the indications given on page A14

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>DAS.4/GR</b>	Cat. No. <b>DS100GR</b>
<b>DAS.4</b>	Cat. No. <b>DS100</b>
<b>DAS.4 (Ex)i</b>	Cat. No. <b>DS200</b>
<b>TECHNICAL CHARACTERISTICS</b>	
2 level feed-through	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
630 V / 32 A / A4	
600 V / 20 A / 20-12 AWG / 8,9 lb.in	
400 / 400	
8 KV / 3	
9	
0,5 / 1,2	
62 / 64 / 6	
70 / 64 / 6	
66 / 64 / 6	

<b>DAS.4/CI/GR</b>	Cat. No. <b>DS117GR</b>
<b>DAS.4/CI</b>	Cat. No. <b>DS117</b>
<b>DAS.4/CI (Ex)i</b>	Cat. No. <b>DS217</b>
<b>TECHNICAL CHARACTERISTICS</b>	
feed-through equipped with internal cross-connection	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
630 V / 32 A / A4	
-	
8 KV / 3	
9	
0,5 / 1,2	
62 / 64 / 6	
70 / 64 / 6	
66 / 64 / 6	

### APPROVALS



Approvals referred to terminal block type DAS.4

### ACCESSORIES

End sections	grey beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Shunting screw and sleeve	
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>DAS/PT/GR</b>	DS101GR
<b>DAS/PT</b>	DS101
<b>DAS/PT (Ex)i</b>	DS201
<b>PM/41/2</b> poles	PM412
<b>PM/51/3</b> poles	PM513
<b>PM/51/5</b> poles	PM515
<b>PM/51/10</b> poles	PM510
<b>32</b>	
-	
<b>POS/43</b>	POS43
<b>PMP/58</b>	PMP58
<b>CPM/01 (CPX/01)</b>	CPM01 (CPX01)
<b>DFU/7</b>	DU07..
-	
<b>PSD/A</b>	PD001
<b>SDD/1</b>	DD001
-	
-	
<b>CNU/8/61</b>	NU0861
<b>DAS/VCI</b>	DS107
<b>DAS/VCE</b>	DS108
<b>PRP/5</b>	PRP05
<b>CNU/8/61</b>	NU0861
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>DAS/PT/GR</b>	DS101GR
<b>DAS/PT</b>	DS101
<b>DAS/PT (Ex)i</b>	DS201
<b>PM/41/2</b> poles	PM412
<b>PM/51/3</b> poles	PM513
<b>PM/51/5</b> poles	PM515
<b>PM/51/10</b> poles	PM510
<b>32</b>	
-	
<b>POS/43</b>	POS43
<b>PMP/58</b>	PMP58
<b>CPM/01 (CPX/01)</b>	CPM01 (CPX01)
<b>DFU/7</b>	DU07..
-	
<b>PSD/A</b>	PD001
<b>SDD/1</b>	DD001
-	
-	
<b>CNU/8/61</b>	NU0861
-	
<b>DAS/VCE</b>	DS108
<b>PRP/5</b>	PRP05
<b>CNU/8/61</b>	NU0861
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

# On two levels

## with UL94V-0 polyamide insulating body

- feed-through with solder lugs
- with upper disconnect lever
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours



with 2.8 x 0.8 mm staggered solder lugs



Please, see page 136 (table) to determine the insulation voltage of the different PTC connection diagrams


The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

(\*) value referred to the staggered position of solder lugs  
 (\*\*\*) referring respectively to upper and lower levels  
 (\*\*\*) max. on lug

<b>DAS.4/SS/GR</b>	Cat. No. <b>DS110GR</b>
<b>DAS.4/SS</b>	Cat. No. <b>DS110</b>
<b>TECHNICAL CHARACTERISTICS</b>	
feed-through with solder lugs	
4	
flexible	0,2 ÷ 6
rigid	0,2 ÷ 6
4 - WP40/16	
320 V - 500 V (*) / 20 A (***) / A4	
-	
4 kV / 3	
9	
0,5 / 1,2	
62 / 80 / 6	
70 / 80 / 6	
66 / 80 / 6	

<b>DSS.4/GR</b>	Cat. No. <b>DS400GR</b>
<b>DSS.4</b>	Cat. No. <b>DS400</b>
<b>TECHNICAL CHARACTERISTICS</b>	
with upper disconnect level	
4	
flexible	0,2 ÷ 6
rigid	0,2 ÷ 6
4 - WP40/16	
400 V / 24-32 (***) / A4	
300 V / 24-32 A / 26-10 AWG / 4,4 lb.in	
-	
6 kV / 3	
9	
0,5 / 1,2	
62 / 78 / 6	
70 / 78 / 6	
66 / 78 / 6	

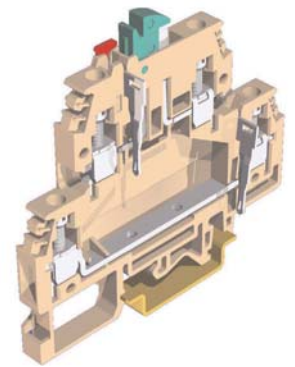

terminal block type DSS.4 with lever up and PTC/4 cross connections inserted on both levels.

### APPROVALS

Approvals referred to terminal block type DAS.4



<b>ACCESSORIES</b>	
End sections	grey beige blue
Permanent cross connection (* intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Fuse	
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>DAS/PT/GR</b>	DS101GR
<b>DAS/PT</b>	DS101
<b>PM/41/2</b> poles	PM412
<b>PM/51/3</b> poles	PM513
<b>PM/51/5</b> poles	PM515
<b>PM/51/10</b> poles	PM510
<b>32</b>	
-	
<b>POS/43</b>	POS43
<b>PMP/58</b>	PMP58
<b>CPM/01 (CPX/01)</b>	CPM01 (CPX01)
<b>DFU/7</b>	DU07..
-	
<b>PSD/A</b>	PD001
<b>SDD/1</b>	DD001
-	
-	
<b>CNU/8/61</b>	NU0861
-	
<b>PRP/5</b>	PRP05
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3</b> for PR/3 only	BT003
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>DSS/PT/GR</b>	DS301GR
<b>DSS/PT</b>	DS301
<b>PTC/4/02</b> poles (*)	PTC0402
<b>PTC/4/03</b> poles (*)	PTC0403
<b>PTC/4/05</b> poles (*)	PTC0405
<b>PTC/4/10</b> poles (*)	PTC0410
<b>PTC/4/00</b> (42 poles) (*)	PTC0400
<b>32</b>	
<b>PTC/SP</b>	PTC0990
-	
-	
-	
<b>DFU/7</b>	DU07..
<b>DFM/500</b>	DF500
-	
-	
-	
<b>CNU/8/61</b>	NU0861
-	
-	
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

# On two levels

## with UL94V-0 polyamide insulating body

- with push-on tab connections
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours



6,3 x 0,8 mm or  
2,8 x 0,8 mm, push-on  
connections conf. to IEC  
60760



**FVS/VCI - Cat. No. FV107**  
Shunting screws and sleeves for internal connection between the front and rear conducting bodies of terminal block type FVS.4



**FVS/VCE - Cat. No. FV108**  
Screw and sleeve that, in addition to internal connection, allows to perform with the addition of PMP bar, adjoining cross-connections

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>FVS.4/GR</b>	Cat. No. <b>FV100GR</b>
<b>FVS.4</b>	Cat. No. <b>FV100</b>
<b>TECHNICAL CHARACTERISTICS</b>	
for overlapped circuits	4
connecting capacity	
flexible	0,2 ÷ 6
rigid	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge	320 V / 20 A / A4
rated voltage / rated current / AWG / tightening torque value	600 V / 20 A / 20-10 AWG / 8,9 lb.in.
rated impulse withstand voltage / pollution degree	6 kV / 3
insulation stripping length	12
tightening torque value (test / max)	0,8 / 1,2
height / width / thickness	69 / 64 / 6,5
height / width / thickness	77 / 64 / 6,5
height / width / thickness	73 / 64 / 6,5

<b>FFS.4/GR</b>	Cat. No. <b>FF100GR</b>
<b>FFS.4</b>	Cat. No. <b>FF100</b>
<b>TECHNICAL CHARACTERISTICS</b>	
for overlapped circuits in staggered position	4
connecting capacity	
flexible	0,2 ÷ 6
rigid	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge	320 V / 20 A / A4
rated voltage / rated current / AWG / tightening torque value	600 V / 20 A / 20-10 AWG / 8,9 lb.in.
rated impulse withstand voltage / pollution degree	6 kV / 3
insulation stripping length	12
tightening torque value (test / max)	0,8 / 1,2
height / width / thickness	69 / 64 / 6,5
height / width / thickness	77 / 64 / 6,5
height / width / thickness	73 / 64 / 6,5

### APPROVALS




### ACCESSORIES

End sections	grey beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Shunting screw and sleeve	
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>FVS/PT/GR</b>	FV101GR
<b>FVS/PT</b>	FV101
<b>32</b>	
<b>POS/72</b>	POS72
<b>PMP/42</b>	PMP42
<b>CPM/01 (CPX/01)</b>	CPM01 (CPX01)
<b>DFU/6</b>	DU06..
<b>PSD/A</b>	PD001
<b>SDD/1</b>	DD001
-	-
-	-
-	-
<b>FVS/VCI</b>	FV107
<b>FVS/VCE</b>	FV108
<b>PRP/6</b>	PRP06
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005


Type	Cat. No.
<b>FFS/PT/GR</b>	FF101GR
<b>FFS/PT</b>	FF101
<b>32</b>	
<b>POS/72</b>	POS72
<b>PMP/42</b>	PMP42
<b>CPM/01 (CPX/01)</b>	CPM01 (CPX01)
-	-
-	-
<b>PSD/A</b>	PD001
<b>SDD/1</b>	DD001
-	-
-	-
-	-
<b>PRP/6</b>	PRP06
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005



### VCI

internal cross connection


PMP bar  
(to be added to VCE)



### VCE

internal

+  
front adjoining cross-connection



### VCI + PM


parallelo interno

+  
contiguo posteriore


# On two levels

## with UL94V-0 polyamide insulating body


- three level - for sensors
- with LOCK system
- suited for LED indication
- to be mounted onto PR/3 type rails - according to IEC 60715 Std., "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours



TLS.2/T



TLS.2/U

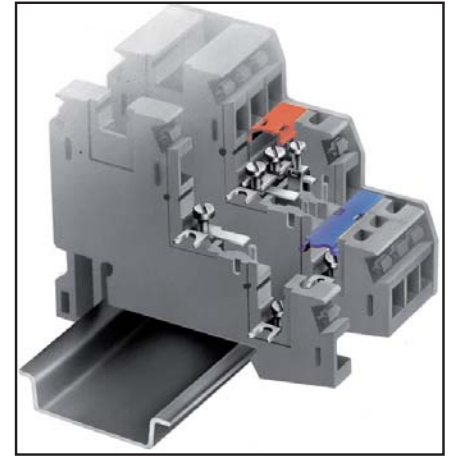

LOCK system

TLS.2/T Cat. No. TL120 (with green LED between upper and intermediate levels)

TLS.2/U Cat. No. TL110 (with green LED between upper and lower levels)

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS

<b>TLS.2/GR</b>	
Cat. No.	TL100GR
<b>TLS.2</b>	
Cat. No.	TL100
<b>TECHNICAL CHARACTERISTICS</b>	
three level - for sensors	
2,5	
0,2 ÷ 4	
0,2 ÷ 4	
2,5 - WP25/14	
250 V / 24 A / A3	
600 V / 15 A / 20-12 AWG / 3,5 lb.in	
-	
4 kV / 3	
8	
0,4 / 0,8	
52 / 62,5 / 6,2	
60 / 62,5 / 6,2	
-	

For the installation on limited longitudinal space where high density wiring is needed together with reliable insulation, special feed-through two/three level terminal blocks are available. The three level terminal blocks are suitable for circuits which are to be used and connected with specific equipment, as for example proximity sensors. In fact with the combined use of TLS.2 and TLD.2 terminal block, both the feeding and the signal carrying conductors of the proximity sensors can be economically and efficiently connected.

Particularly in the **TLS.2** terminal block, the intermediate and lower levels can be used to feed the sensors in d.c.; the feeding is distributed on the adjoining elements of the terminal board by means of a special **LOCK** connection system.

The above mentioned conducting bodies have a fork, pointed towards the exterior of the terminal block, which connects to the homologous element of the adjoining terminal block. The tightening of the resulting electrical contact is by means of a screw, already inserted in the threaded hole of the conducting bodies.

**The LOCK system, above described, allows the connection of positive and negative poles, without the use of any other parallel cross connection.** The conductors carrying the return signal from the sensor is connected to the upper feed-through level; the insertion, in the appropriate grooving of **PRP/5** coloured covers avoids any possible contact with the live parts, and allows an immediate identification of the polarity (Red for +, Blue for -).

**TLD.2** terminal block is perfectly compatible with the **TLS.2** for the connection of proximity sensors, as it has the same electrical and mechanical characteristics. Two of six tightening units can be connected to the sensor feeding cables and distribute the power supply to the other sensors.

**The cross-connection between the intermediate and lower levels of these terminal blocks to the contiguous ones of the TLS.2 can be performed by means of the two screws provided in the fork type conducting bodies of the TLS.2 – the first of the series – free from whatever connection; between the TLD.2 and TLS.2 terminal blocks a TLD/PI intermediate end section must be interposed, to ensure electric insulation of the TLD.2 terminal block conducting parts, which otherwise would be uncovered.**

TLD.2 terminal block can also be used for other connecting applications, in other types of circuits.

<b>ACCESSORIES</b>	
End sections	grey beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

<b>Type</b>		<b>Cat. No.</b>	
TLS/PT/GR		TL101GR	
TLS/PT		TL101	
PM/20/2 poles		PM202	
PM/30/3 poles		PM303	
PM/30/5 poles		PM305	
PM/30/10 poles		PM310	
24			
POS/41		POS41	
PMP/02		PMP02	
CPM/21		CPM21	
DFU/3		DU03..	
DFM/400		DF400	
PSD/D		PD004	
SDD/1		DD001	
-			
-			
-			
-			
PRP/5		PRP05	
CNU/8/51		NU0851	
BTU for PR/DIN and PR/3		BT005	
BTO for PR/3 only		BT007	
BT/3 for PR/3 only		BT003	
PR/3/AC for PR/DIN and PR/3		PR003	
PR/3/AS same with slots		PR005	

# On two levels

## with UL94V-0 polyamide insulating body

- 3 feed-through levels
- 3 levels + earth connection
- to be mounted onto TH 35-7,5 and TH 35-15 type rails - according to IEC 60715 Std.
- available in grey RAL 7042 and beige RAL 1001 colours



with earth connection on lower level



with earth connection on lower level and feed-through on intermediate and upper levels

The **/GR** tag indicates the grey colour version.

(\*): 24 A factory wiring only

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>TLE.2/GR</b>	Cat. No. <b>TL400GR</b>
<b>TLE.2</b>	Cat. No. <b>TL400</b>
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>TLD.2/GR</b>	Cat. No. <b>TL200GR</b>
<b>TLD.2</b>	Cat. No. <b>TL200</b>
<b>TLD.2 (Ex)i</b>	Cat. No. <b>TL300</b>
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>TDE.2/GR</b>	Cat. No. <b>TL500GR</b>
<b>TDE.2</b>	Cat. No. <b>TL500</b>
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS



### ACCESSORIES

End sections	grey beige intermedio
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

Type	Cat. No.
<b>TLS/PT/GR</b>	TL101GR
<b>TLS/PT</b>	TL101
<b>PM/20/2</b> poles	PM202
<b>PM/30/3</b> poles	PM303
<b>PM/30/5</b> poles	PM305
<b>PM/30/10</b> poles	PM310
<b>24</b>	
<b>POS/41</b>	POS41
<b>PMP/02</b>	PMP02
<b>CPM/21</b>	CPM21
<b>DFU/3</b>	DU03..
<b>DFM/400</b>	DF400
<b>PSD/D</b>	PD004
<b>SDD/1</b>	DD001
-	-
-	-
-	-
<b>PRP/5</b>	PRP05
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
<b>BT/3</b> for PR/3 only	BT003
-	-
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>TLD/PT/GR</b>	TL201GR
<b>TLD/PT</b>	TL201
<b>TLD/PI</b>	TL202
<b>PM/20/2</b> poles	PM202
<b>PM/30/3</b> poles	PM303
<b>PM/30/5</b> poles	PM305
<b>PM/30/10</b> poles	PM310
<b>24</b>	
<b>POS/41</b>	POS41
<b>PMP/02</b>	PMP02
<b>CPM/21</b>	CPM21
<b>DFU/3</b>	DU03..
<b>DFM/400</b>	DF400
<b>PSD/D</b>	PD004
<b>SDD/1</b>	DD001
-	-
-	-
<b>CNU/8/51</b>	NU0851
-	-
<b>PRP/5</b>	PRP05
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
<b>BT/3</b> for PR/3 only	BT003
-	-
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005


Type	Cat. No.
<b>TLD/PT/GR</b>	TL201GR
<b>TLD/PT</b>	TL201
<b>PM/20/2</b> poles	PM202
<b>PM/30/3</b> poles	PM303
<b>PM/30/5</b> poles	PM305
<b>PM/30/10</b> poles	PM310
<b>24</b>	
<b>POS/41</b>	POS41
<b>PMP/02</b>	PMP02
<b>CPM/21</b>	CPM21
<b>DFU/3</b>	DU03..
<b>DFM/400</b>	DF400
<b>PSD/D</b>	PD004
<b>SDD/1</b>	DD001
-	-
-	-
<b>CNU/8/51</b>	NU0851
-	-
<b>PRP/5</b>	PRP05
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b> for PR/3 only	BT007
<b>BT/3</b> for PR/3 only	BT003
-	-
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

# Fuse-holders

## with UL94V-0 polyamide insulating body

- for  $\varnothing 5 \times 20$  mm fuses, with possibility to detect the fuse blow-out status, by means of a LED micro-circuit (CIL...)
- available in (grey RAL 7042 and beige RAL 1001 colours)
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types

Please, see page 136 (table) to determine the insulation voltage of the different PTC connection diagrams

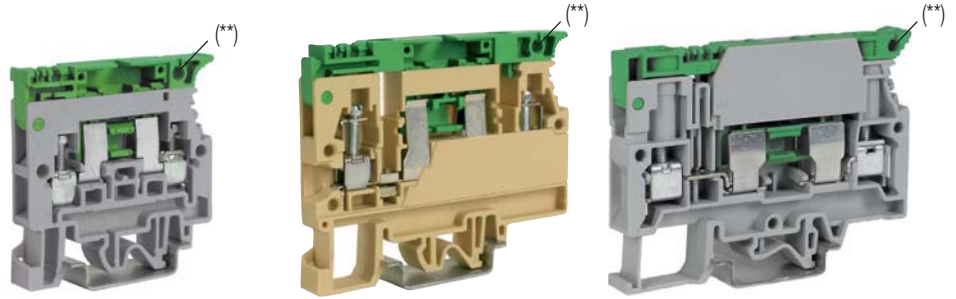

with possibility to perform cross connections both upstream and downstream the disconnection point

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  -  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS

<b>ACCESSORIES</b>	
End sections	grey beige blue
Permanent cross connection (pre-assembled) (***) intrinsically IPXB protected once mounted	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Miniature fuse	$\varnothing 5 \times 20$ mm
LED circuit composed by:	non-polarised
- 2 contacts	
- 1 microcircuit or bulb	
- 1 transparent cover - to be inserted in such a sequence	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	 

Max. dissipated power – In conf. with IEC 60947-7-3						
Terminal block	Voltage [V] (*)	Current [A]	Protection against overload and short circuit		Only protection against short circuit	
			Single configuration (PV) - [W]	Composite configuration (PV) - [W]	Single configuration (PV) - [W]	Composite configuration (PV) - [W]
SFR.4	250	6,3	2,5	1,6	2,5	2,5
SFO.4	250	6,3	2,5	1,6	4	2,5
SFR.6/M	250	6,3 / 10 Max.	2,5 (6,3 A)	1,6 (6,3 A)	4 (10 A)	2,5 (6,3 A)

(\*) value referred to the insulation characteristics of the terminal block – (\*\*) all terminal blocks are equipped with a hole suited for the sealing of the lever or for the insertion of a rod for the simultaneous opening of the lever of adjoining terminal blocks

<b>SFR.4/GR</b> Cat. No. <b>SF900GR</b>	<b>SFO.4/GR</b> Cat. No. <b>SF400GR</b>	<b>SFR.6/M/GR</b> Cat. No. <b>SR500GR</b>
<b>SFR.4</b> Cat. No. <b>SF900</b>	<b>SFO.4</b> Cat. No. <b>SF400</b>	<b>SFR.6/M</b> Cat. No. <b>SR500</b>
for $\varnothing 5 \times 20$ mm fuses 4	for $\varnothing 5 \times 20$ mm fuses 4	for $\varnothing 5 \times 20$ mm fuses 6
0,2 ÷ 6 0,2 ÷ 6 4 - WP40/16 800 V (*) / 6,3 A max (20 A with CO/5) / A4 600 V / 6,3 A / 20-12 AWG / 4,4 lb.in.	0,2 ÷ 6 0,2 ÷ 6 4 - WP40/16 800 V (*) / 6,3 A max (16 A with CO/5) / A4 600 V / 6,3 A / 20-12 AWG / 7 lb.in.	0,2 ÷ 10 0,2 ÷ 10 6 - WP60/20 630 V (*) / 10 A max. (19 A with CO/5) / A5 600 V / 6,3 A / 20-8 AWG / 13 lb.in.
6 kV / 3 11 0,5 / 1,2 52 / 52 / 8 60 / 52 / 8 56 / 52 / 8	6 kV / 3 11 0,5 / 1,2 59 / 73 / 8 67 / 73 / 8 62 / 73 / 8	6 kV / 3 11 0,8 / 1,4 59 / 79 / 10 67 / 79 / 10 63 / 79 / 10



Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
SFR.4/PT/GR	SF701GR	-	-	SFR.6/PT/GR	SR301GR
SFR.4/PT	SF701	SFO/PT	SF401	SFR.6/PT	SR301
SFR.4/PT (Ex)i	SF801	SFO/PT (Ex)i	SF601	SFR.6/PT (Ex)i	SR401
-	-	PM/90/2 poles	PM902	PTC/20/02 poles (***)	PTC2002
-	-	PM/90/3 poles	PM903	PTC/20/03 poles (***)	PTC2003
-	-	PM/90/5 poles	PM905	PTC/20/05 poles (***)	PTC2005
-	-	PM/90/10 poles	PM900	PTC/20/10 poles (***)	PTC2010
-	-	24	-	PTC/20/00 (25 poles) (***)	PTC2000
-	-	PMP/20	PMP20	25	-
-	-	CPM/20	CPM20	PTC/SP	PTC0990
DFU/3	DU03..	DFU/7	DU07..	-	-
-	-	-	-	DFU/7	DU07..
-	-	PSD/J	PD014	DFM/300	DF300
-	-	SDD/1	DD001	-	-
CNU/8/51	NU0851	CNU/8/51	NU0851	SDD/1	DD001
F5	FN...	F5	FN...	CNU/8/51	NU0851
CIL/12	SF512	CIL/12	SF512	F5	FN...
CIL/24	SF524	CIL/24	SF524	KITLSN/12-24	KIT1224
CIL/48	SF548	CIL/48	SF548	KITLSN/70-380	KIT70380
CIL/115	SF515	CIL/115	SF515	-	-
CIL/230	SF523	CIL/230	SF523	-	-
CNU/8/51	NU0851	CNU/8/51	NU0851	CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007	BT/3-BTO for PR/3 only	BT003-BT007	BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003	PR/3/AC for PR/DIN and PR/3	PR003	PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005

# Fuse-holders

## with UL94V-0 polyamide insulating body

- for  $\varnothing$  5 x 20 mm fuses, with possibility to detect the fuse blow-out status, by means of a LED micro-circuit (CIL...)
- standard versions available in grey RAL 7042 and beige RAL 1001 colours (where indicated)
- for  $\varnothing$  6.3 x 32 mm fuses
- with solder lug
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types

Please, see page 136 (table) to determine the insulation voltage of the different PTC connection diagrams

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section (mm <sup>2</sup> )	
connecting capacity	
flexible (mm <sup>2</sup> )	
rigid (mm <sup>2</sup> )	
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length (mm)	
tightening torque value (test / max) (Nm)	
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS




other approvals referred to the standard version



other approvals referred to the standard version

### ACCESSORIES

End sections	grey beige blue
Permanent cross connection (pre-assembled) (***) intrinsically IPXXB protected once mounted	
Rated current carrying capacity of jumper (A)	
Cross-connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Miniature fuse	$\varnothing$ 5 x 20 mm
LED circuit composed by:	non-polarised
- 2 contacts	
- 1 microcircuit or bulb	
- 1 transparent cover - to be inserted in such a sequence	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

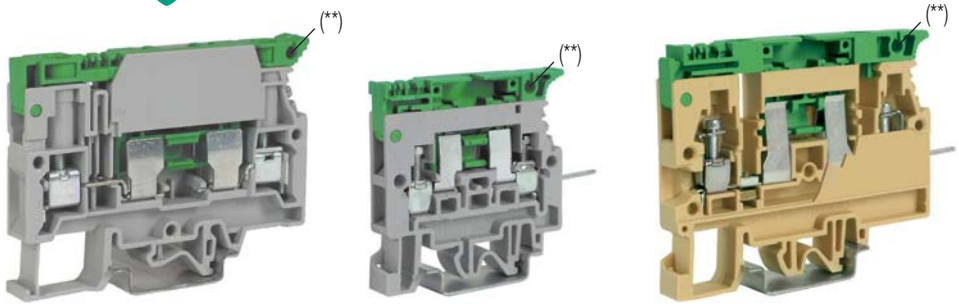

The terminal block is equipped with a lever suited to house a  $\varnothing$  6.3 x 32 mm - 500 V fuse (not supplied)

4 x 0,8 mm solder lug

4 x 0,8 mm solder lug

Max. dissipated power – In conf. with IEC 60947-7-3						
Terminal block	Voltage [V] (*)	Current [A]	Protection against overload and short circuit		Only protection against short circuit	
			Single configuration (PV) - [W]	Composite configuration (PV) - [W]	Single configuration (PV) - [W]	Composite configuration (PV) - [W]
SFR.6	250	10	2,5 (2,5 A)	1,6 (1 A)	4 (10 A)	2,5 (2,5 A)
SFR.4	250	6,3	2,5	1,6	2,5	2,5
SFO.4	250	6,3	2,5	1,6	4	2,5

(\*) value referred to the insulation characteristics of the terminal block – (\*\*) all terminal blocks are equipped with a hole suited for the sealing of the lever or for the insertion of a rod for the simultaneous opening of the lever of adjoining terminal blocks – (\*\*\*) neon bulb

<b>SFR.6/GR</b>	Cat. No. <b>SR300GR</b>
<b>SFR.6</b>	Cat. No. <b>SR300</b>
for fuses	
6	
0,2 ÷ 10	
0,2 ÷ 10	
6 - WP60/20	
630 V (*) / 10 A (33 A with brass cylinder) / A5	
600 V / 10 A / 20-8 AWG / 13 lb.in	
-	
6 KV (*) / 3	
11	
0,8 / 1,4	
59 / 79 / 10	
67 / 79 / 10	
63 / 79 / 10	

<b>SFR.4/VS/GR</b>	Cat. No. <b>SF910GR</b>
<b>SFR.4/VS</b>	Cat. No. <b>SF910</b>
for fuses with solder lug	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
400 V (*) / 6,3 A max (15 A with CO/5) / A4	
-	
4 KV (*) / 3	
11	
0,5 / 1,2	
52 / 65 / 8	
60 / 65 / 8	
56 / 65 / 8	

<b>SFO.4/VS</b>	Cat. No. <b>SF410</b>
for fuses with solder lug	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
400 V (*) / 6,3 A max (15 A with CO/5) / A4	
-	
4 KV (*) / 3	
11	
0,5 / 1,2	
59 / 85 / 8	
67 / 85 / 8	
63 / 85 / 8	

Type	Cat. No.
SFR.6/PT/GR	SR301GR
SFR.6/PT	SR301
SFR.6/PT (Ex)i	SR401
PTC/20/02 poles (***)	PTC2002
PTC/20/03 poles (***)	PTC2003
PTC/20/05 poles (***)	PTC2005
PTC/20/10 poles (***)	PTC2010
PTC/20/00 (25 poles) (***)	PTC2000
25	
PTC/SP	PTC0990
-	
DFU/7	DU07..
DFM/300	DF300
-	
SDD/1	DD001
-	
KITLSN/12-24	KIT1224
KITLSN/70-380	KIT70380
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
-	
SFR.4/PT	SR701
-	
-	
-	
-	
DFU/3	DU03..
-	
-	
-	
F5	FN...
CIL/12	SF512
CIL/24	SF524
CIL/48	SF548
CIL/115	SF515
CIL/230	SF523
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
-	
SFO/PT	SF401
-	
PM/90/2 poles	PM902
PM/90/3 poles	PM903
PM/90/5 poles	PM905
PM/90/10 poles	PM900
25	
-	
PMP/20	PMP20
-	
DFU/7	DU07..
-	
SDD/1	DD001
CNU/8/51	NU0851
F5	FN...
CIL/12	SF512
CIL/24	SF524
CIL/48	SF548
CIL/115	SF515
CIL/230	SF523
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

# Fuse-holder/diode-holder

with UL94V-0 polyamide insulating body



**NEW**  
cabur

- mounting onto PR/3, TH/35 type rails, according to IEC 60715 Std.
- two-levels: upper: fuse-holder / diode holder; lower: feed-through
- for  $\varnothing 5 \times 20$  mm fuses (supplied separately) with possibility to detect the fuse-blowout status, by means of a LED micro-circuit (CIL...)
- for 1 A diodes (types 1N4001 ÷ 1N4007)
- for 3 A diodes (types BY255)
- Available in grey colour (RAL 7042)

The /GR tag indicates the grey colour version.

**NEW** **grey version**

**beige version**

## TECHNICAL CHARACTERISTICS

function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

## APPROVALS

## ACCESSORI

End sections	grey beige blue
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Numbering strip	
Miniature fuse	$\varnothing 5 \times 20$ mm
Conducting element	$\varnothing 5 \times 20$ mm
LED circuit composed by:	non-polarised
- 2 contacts	
- 1 microcircuit	
- 1 transparent cover - to be inserted in such a sequence	
Marking tag	printed or blank
Terminal block with LED 12 ÷ 48 V non polarised micro-circuit	
Terminal block with LED 115 ÷ 230 V non polarised micro-circuit	
1 A cartridge / insert	
3 A cartridge / insert	
Terminal block with 1 A diode	
Terminal block with 3 A diode	
End bracket	
Mounting rail	
according to IEC 60715 Std.	

**DSF.4/GR** Cat. No. **DA200GR**

**DSF.4** Cat. No. **DA200**

On two levels: $\varnothing 5 \times 20$ mm fuse-holder (upper level) - feed-through (lower level)	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
800 V / [6,3 A (10 A with CO/5) (upper lever)] - 32 A (lower level) / A4	
-	
8 kV / 3	
9	
0,5 / 1,2	
69 / 79,5 / 8	
77 / 79,5 / 8	
- / - / -	

KEMA-KEUR, UL pending

## Type Cat. No.


<b>DSF.4/PT/GR</b>	DS401GR
<b>DFU/7</b>	DU07..
-	
-	
-	
<b>F5/...</b>	FN...
<b>CO/5</b>	VL103
<b>CIL/12-48</b>	SF518
<b>CIL/115-230</b>	SF510
<b>CNU/8</b>	NU08...
<b>CNU/10</b>	NU10...
<b>DSF.4/GR/C12-48</b>	DA518GR
<b>DSF.4/GR/C115-230</b>	DA510GR
<b>SFR/11A</b> (con diodo da 1 A)	SF992
<b>SFR/13A</b> (con diodo da 3 A)	SF993
<b>DSF.4/GR/D1A</b>	DA901GR
<b>DSF.4/GR/D3A</b>	DA903GR
<b>BTU</b> per PR/DIN e PR/3	BT005
<b>BT/3-BTO</b> solo per PR/3	BT003-BT007
<b>PR/3/AC</b> per PR/DIN e PR/3	PR003
<b>PR/3/AS</b> idem con asole	PR005



# Fuse-holders

## with UL94V-0 polyamide insulating body

- for blade fuse acc. to DIN 72581/3F – ISO 8820
- standard versions available in grey RAL 7042 and beige RAL 1001 colours (where indicated)
- with possibility to insert the “Easy Bridge” multi-pole cross connection upstream the fuse
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., “G32” and “TH/35” types

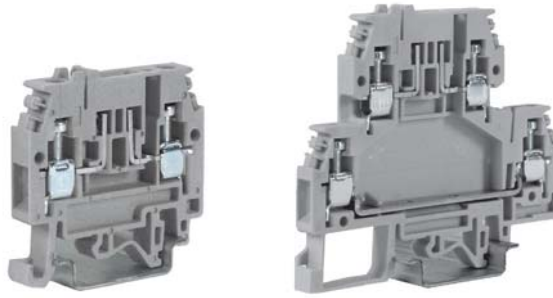

- (\*) value referred to the insulation characteristics of the terminal block
- (\*\*) values referred, respectively, to lower and upper levels
- (\*\*\*) suitable for all the blade fuses with similar dimensions
- (\*\*\*\*) separate configuration conf. to IEC 60947-7-3

PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING

Terminal block	Jumper	Insulation voltage in the above configurations (V)			
MPFA.4	PTC/4	400	400	400	400
DSFA.4	PTC/4	400	400	400	400

The /GR tag indicates the grey colour version.

grey version	
beige version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section (mm <sup>2</sup> )	4
connecting capacity	
flexible (mm <sup>2</sup> )	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	400 V (*) / 15 A (****) / A4
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage  /  (V)	600 V / 6,3 A / 26-10 AWG / 4,4 lb.in
rated impulse withstand voltage / pollution degree	6 kV (*) / 3
insulation stripping length (mm)	9
tightening torque value (test / max) (Nm)	0,5 / 1,2
height / width / thickness  TH/35 7,5 mm	47 / 47 / 6
height / width / thickness  TH/35 15 mm	55 / 47 / 6
height / width / thickness  G32	51 / 47 / 6

MPFA.4/GR	
Cat. No.	MF100GR
MPFA.4	
Cat. No.	MF100
for blade fuse (***)	4
connecting capacity	
flexible (mm <sup>2</sup> )	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	400 V (*) / 15 A (****) / A4
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage  /  (V)	600 V / 6,3 A / 26-10 AWG / 4,4 lb.in
rated impulse withstand voltage / pollution degree	6 kV (*) / 3
insulation stripping length (mm)	9
tightening torque value (test / max) (Nm)	0,5 / 1,2
height / width / thickness  TH/35 7,5 mm	47 / 47 / 6
height / width / thickness  TH/35 15 mm	55 / 47 / 6
height / width / thickness  G32	51 / 47 / 6

DSFA.4/GR	
Cat. No.	DA100GR
DSFA.4	
Cat. No.	DA100
for blade fuse (***)	2 level - for blade fuse (***) on the upper level
connecting capacity	
flexible (mm <sup>2</sup> )	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	400 V (*) / 15 A (****) - 32 A (**) / A4
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage  /  (V)	300 V / 6,3 - 30 A / 26-10 AWG / 4,4 lb.in
rated impulse withstand voltage / pollution degree	6 kV / 3
insulation stripping length (mm)	9
tightening torque value (test / max) (Nm)	0,5 / 1,2
height / width / thickness  TH/35 7,5 mm	68 / 78 / 6
height / width / thickness  TH/35 15 mm	75 / 78 / 6
height / width / thickness  G32	72 / 78 / 6



**MPFA.4** – detail of the terminal blocks with CNU/8 and SNZ/60 numbering, blade fuse, view of the PTC/4 and PTC. The terminal block can be supplied with a non-polarised LED signal circuit, to detect the fuse blow-out status. Two versions are available depending on the different supply voltages.

**MPFA.4/L12** Cat. No.MF112 (with 12 V non-polarised LED circuit)

**MPFA.4/L24** Cat. No.MF124 (with 24 V non-polarised LED circuit)

## APPROVALS



Approvals referred to the use with CPF/5 fuse carrier cartridge




Approvals referred to the use with CPF/5 fuse carrier cartridge

## ACCESSORIES

End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper (A)	
Cross-connection identification strip (100 mm)	green
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Blade-type fuses	In = 2 A In = 5 A In = 7,5 A In = 15 A
according to DIN 72581/3F ISO 8820	
- max voltage 32 V	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

Type	Cat. No.
<b>MPS.4/PT/GR</b>	MP901GR
<b>MPS.4/PT</b>	MP901
-	-
<b>PTC/4/02</b> poles	PTC0402
<b>PTC/4/03</b> poles	PTC0403
<b>PTC/4/05</b> poles	PTC0405
<b>PTC04/10</b> poles	PTC0410
<b>PTC/4/00</b> (42 poles)	PTC0400
<b>32</b>	
<b>PTC/SP</b>	PTC0990
-	-
-	-
<b>DFU/3</b>	DU03..
<b>DFM/500</b>	DF500
-	-
-	-
-	-
-	-
<b>F32/2</b> In = 2 A	FN03202
<b>F32/5</b> In = 5 A	FN03205
<b>F32/7</b> In = 7,5 A	FN03207
<b>F32/15</b> In = 15 A	FN03215
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>DSS/PT/GR</b>	DS301GR
<b>DSS/PT</b>	DS301
-	-
<b>PTC/4/02</b> poles	PTC0402
<b>PTC/4/03</b> poles	PTC0403
<b>PTC/4/05</b> poles	PTC0405
<b>PTC04/10</b> poles	PTC0410
<b>PTC/4/00</b> (42 poles)	PTC0400
<b>32</b>	
<b>PTC/SP</b>	PTC0990
-	-
-	-
-	-
-	-
-	-
<b>F32/2</b> In = 2 A	FN03202
<b>F32/5</b> In = 5 A	FN03205
<b>F32/7</b> In = 7,5 A	FN03207
<b>F32/15</b> In = 15 A	FN03215
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005



**DSFA.4** – detail of the terminal blocks with CNU/8 and SNZ/60 numbering, blade fuse, view of the PTC/4 jumpers on the upper level (upstream the fuse) and on the lower level. The terminal block can be supplied with a non-polarised LED signal circuit, to detect the fuse blow-out status. Two versions are available depending on the different supply voltages.

**DSFA.4/L12** Cat. No.DA112 (with 12 V non-polarised LED circuit)

**DSFA.4/L24** Cat. No.DA124 (with 24 V non-polarised LED circuit)

# Component-holder cartridge

with UL94V-0 polyamide insulating body


- to be mounted on MPFA.4, DSFA.4 and HMFA.2 (see page 84)
- a fuse  $\varnothing 5 \times 20$  mm can be inserted (our type F5, with or without signalling LED, diode (1 or 3 A), brass pin  $\varnothing 5 \times 20$  mm and other components (e.g. resistors))



Max. dissipated power – In conf. with IEC 60947-7-3						
Terminal block	Voltage [V] (*)	Current [A]	Protection against overload and short circuit		Only protection against short circuit	
			Single configuration (PV) - [W]	Composite configuration (PV) - [W]	Single configuration (PV) - [W]	Composite configuration (PV) - [W]
MPFA.4 + CPF/5	250	6,3	1,6	1,6	4	1,6
DSFA.4 + CPF/5	250	6,3	1,6	1,6	4	1,6
HMFA.2 + CPF/5	250	6,3	1,6	1,6	4	1,6

standard version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
(Ex e) rated voltage  /	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

CPF/5	Cat. No.	CPF05
component-holder cartridge		
320 V (a) / 6,3 A (a) / A5		
4 KV / 3		
(b) / 33 / 6		
(b) / 33 / 6		
(b) / 33 / 6		

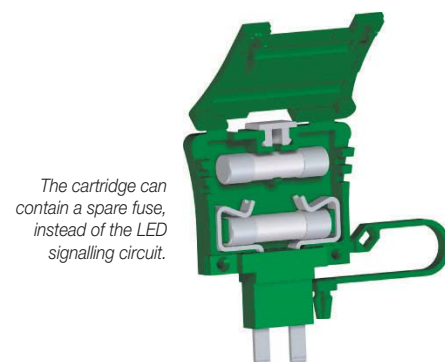

## APPROVALS

Approvals referred to the terminal blocks, on which the cartridge is mounted – see table

ACCESSORIES	
Marking tag	printed or blank
Tinned brass conductor	$\varnothing 5 \times 20$ mm
Cartridge / insert with 1 A diode	
Cartridge / insert with 3 A diode	

Type	Cat. No.
CNU/8/51	NU0851
CO/5	VL103
SFR/I1A (with 1 A diode)	SF992
SFR/I3A (with 3 A diode)	SF993


VERSIONI PREDISPOSTE	
With non-polarized LED microcircuit	12 Vdc / Vac
With non-polarized LED microcircuit	24 Vdc / Vac
With non-polarized LED microcircuit	48 Vdc / Vac
With non-polarized LED microcircuit	115 Vdc / Vac
With non-polarized LED microcircuit	230 Vdc / Vac
With 1 A diode (1N4001 ÷ 1N4007 types)	
With 3 A diode (BY255 type)	
With resistor 1200 $\Omega$ (1 W $\pm$ 5%)	

Type	Cat. No.
CPF/5L12	CPF512
CPF/5L24	CPF524
CPF/5L48	CPF548
CPF/5L115	CPF511
CPF/5L230	CPF523
CPF/5D1A	CPF501
CPF/5D3A	CPF503
CPF/5R	CPR05

Note:

- (a) with fuse  $\varnothing 5 \times 20$  mm, 250 V,  $I_{max} = 6,3$  A – with brass pin  $I_{max} = 10$  A  
 (b) total value, when the cartridge is mounted on terminals, considering as well the mounting rail:

Terminal block	Height on rail  TH/35 7,5 (mm)	Height on rail  TH/35 15 (mm)	Height on rail  G32 (mm)
HMFA.2	57	75	-
MPFA.4	75	83	79
DSFA.4	96	104	100

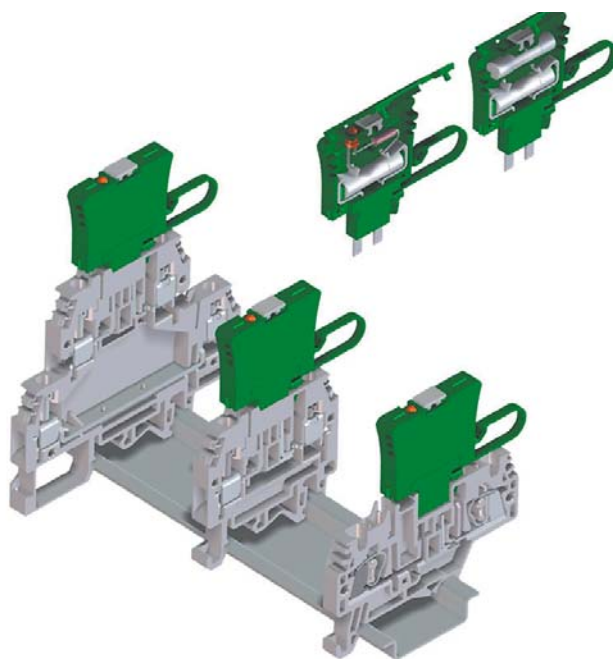

View of the different choices for mounting the cartridge respectively on terminals DSFA.4, MPFA.4 or HMFA.2.

When the cartridge is mounted on HMFA 2 terminals, adjoining one another, a terminal strip must be envisaged between one terminal and the next, because of the pitch differential between terminal and cartridge.

# Fuse-holders

with UL94V-0 polyamide insulating body

- for  $\varnothing$  6.3 x 32 mm fuses
- for  $\varnothing$  6.3 x 32 mm fuses, with possibility to detect the fuse blow-out status, by means of a LED micro-circuit (CIL...)
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., G32 and "TH/35" types
- available in beige RAL 1001 colour



The terminal block is equipped with a lever suited to house a  $\varnothing$  6.3 x 32 mm - 500 V fuse (not supplied).



The terminal block is equipped with a lever suited to house a  $\varnothing$  6.3 x 32 mm - 500 V fuse and a non-polarised LED microcircuit. The interruption of the fuse determines the ignition of the LED. The terminal block can be supplied with the CIL circuit already mounted for the insertion of a non polarised LED circuit.



The terminal block is equipped with a lever suited to house a  $\varnothing$  6.3 x 32 mm - 500 V fuse and a neon lamp with incorporated resistance (our type LSN  $\varnothing$  6 x 26 mm - 380 V max) The interruption of the fuse determines the ignition of the lamp.

(\*) value referred to the insulation characteristics of the terminal block  
 (\*\*) for simultaneous disconnection of adjoining terminal blocks

LSN



beige version	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32
<b>APPROVALS</b>	
<b>ACCESSORIES</b>	
End sections	beige blue
Permanent cross connection (pre-assembled) (***) intrinsically IPXXB protected once mounted	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
MSM handle (**)	
Neon lamp $\varnothing$ 6 x 26 mm	
LED circuit composed by:	<b>non-polarised</b>
- 2 contacts	
- 1 microcircuit	
- 1 transparent cover - to be inserted in such a sequence	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

FPC.10	Cat. No.	FP100
for $\varnothing$ 6.3 x 32 mm fuses		
10		
1,5 ÷ 16		
1,5 ÷ 16		
10 - WP100/21		
800 V (*) / 10 A (20 A with SFC/CO) / B6		
600 V / 15 A / 20-6 AWG / 7 lb.in.		
-		
6 KV (*) / 3		
17		
1,2 / 1,9		
70 / 63 / 12		
78 / 63 / 12		
74 / 63 / 12		
<b>Type</b>	<b>Cat. No.</b>	
-		
-		
-		
DFU/6	DU06..	
-		
SDD/2	DD002	
MSM (6 elements)	FC103	
-		
CNU/8/51	NU0851	
BTU for PR/DIN and PR/3	BT005	
BT/DIN/PO for PR/DIN only	BT001	
BT/3-BTO for PR/3 only	BT003-BT007	
PR/DIN/AC of steel	PR001	
PR/DIN/AS same with slots	PR004	
PR/DIN/AL of aluminium	PR002	
PR/3/AC for PR/DIN and PR/3	PR003	
PR/3/AS same with slots	PR005	

FPL.10/C	Cat. No.	FP300
for $\varnothing$ 6.3 x 32 mm fuses with LED		
10		
1,5 ÷ 16		
1,5 ÷ 16		
10 - WP100/21		
800 V (*) / 10 A / B6		
300 V / 15 A / 20-6 AWG / 7 lb.in.		
-		
6 KV (*) / 3		
17		
1,2 / 1,9		
71 / 63 / 12		
79 / 63 / 12		
75 / 63 / 12		
<b>Type</b>	<b>Cat. No.</b>	
-		
-		
-		
DFU/6	DU06..	
-		
SDD/1	DD001	
MSM (6 elements)	FC103	
-		
CIL/12	SF512	
CIL/24	SF524	
CIL/48	SF548	
CIL/115	SF515	
CIL/230	SF523	
CNU/8/51	NU0851	
BTU for PR/DIN and PR/3	BT005	
BT/DIN/PO for PR/DIN only	BT001	
BT/3-BTO for PR/3 only	BT003-BT007	
PR/DIN/AC of steel	PR001	
PR/DIN/AS same with slots	PR004	
PR/DIN/AL of aluminium	PR002	
PR/3/AC for PR/DIN and PR/3	PR003	
PR/3/AS same with slots	PR005	

FPL.10/L	Cat. No.	FP200
for $\varnothing$ 6.3 x 32 mm fuses with lamp		
10		
1,5 ÷ 16		
1,5 ÷ 16		
10 - WP100/21		
800 V (*) / 10 A (20 A with SFC/CO) / B6		
300 V / 15 A / 20-6 AWG / 7 lb.in.		
-		
6 KV (*) / 3		
17		
1,2 / 1,9		
71 / 63 / 12		
79 / 63 / 12		
75 / 63 / 12		
<b>Type</b>	<b>Cat. No.</b>	
-		
-		
-		
PMP/20	PMP20	
DFU/6	DU06..	
-		
SDD/1	DD001	
MSM (6 elements)	FC103	
LSN	FL202	
-		
CNU/8/51	NU0851	
BTU for PR/DIN and PR/3	BT005	
BT/DIN/PO for PR/DIN only	BT001	
BT/3-BTO for PR/3 only	BT003-BT007	
PR/DIN/AC of steel	PR001	
PR/DIN/AS same with slots	PR004	
PR/DIN/AL of aluminium	PR002	
PR/3/AC for PR/DIN and PR/3	PR003	
PR/3/AS same with slots	PR005	

Approvals referred to the standard version

# Fuse-holders with LED circuit

## with UL94V-0 polyamide insulating body

- for  $\varnothing 5 \times 20$  mm fuses, with possibility to detect the fuse blow-out status, by means of a LED microcircuit (CIL...)
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- with non-polarised LED microcircuits (CIL) to operate under a.c and/or d.c. and to detect the fuse blow-out status
- available in beige RAL 1001 colour



(\*) value referred to the insulation characteristics of the terminal



F5  $\varnothing 5 \times 20$  mm fuse  
(250 V - 5 A max)



CIL/... circuit

The terminal block is equipped with a lever suited for the housing of our **F5** type -  $\varnothing 5 \times 20$  mm **fuse**.

Non-polarized LED microcircuits (CILs) are inserted in an appropriate housing of the lever.

**The interruption of the fuse determines the ignition of the LED.**

Various versions, according to different voltages, are available.

beige version	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

SFR.4/C12	Cat. No.	SF912
with 12V non-polarized LED circuit		
SFR.4/C24	Cat. No.	SF924
with 24V non-polarized LED circuit		
fuse-holder with LED		
4		
0,2 ÷ 6		
0,2 ÷ 6		
4 - WP40/16		
800 V (*) / 6,3 A max / A4		
600 V / 6,3 A / 20-12 AWG / 4,4 lb.in.		
-		
6 KV (*) / 3		
11		
0,5 / 1,2		
52 / 52 / 8		
60 / 52 / 8		
56 / 52 / 8		

SFR.4/C48	Cat. No.	SF948
with 48V non-polarized LED circuit		
SFR.4/C115	Cat. No.	SF915
with 115V non-polarized LED circuit		
SFR.4/C230	Cat. No.	SF923
with 230V non-polarized LED circuit		
fuse-holder with LED		
4		
0,2 ÷ 6		
0,2 ÷ 6		
4 - WP40/16		
800 V (*) / 6,3 A max / A4		
600 V / 6,3 A / 20-12 AWG / 4,4 lb.in.		
-		
6 KV (*) / 3		
11		
0,5 / 1,2		
52 / 52 / 8		
60 / 52 / 8		
56 / 52 / 8		

Approvals referred to the standard version (see page 32)

Approvals referred to the standard version (see page 32)

ACCESSORIES	
End sections	beige blue
Permanent cross connection	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Miniature fuse	$\varnothing 5 \times 20$ mm
Conducting element	
LED circuit	<b>non-polarized</b>

Type	Cat. No.
SFR/PT	SF701
-	-
-	-
-	-
-	-
DFU/3	DU03..
-	-
-	-
-	-
F5	FN...
C0/5	VL103
-	-

Type	Cat. No.
SFR/PT	SF701
-	-
-	-
-	-
-	-
DFU/3	DU03..
-	-
-	-
-	-
F5	FN...
C0/5	VL103
-	-

Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	


CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

# Fuse-holders with LED circuit

## with UL94V-0 polyamide insulating body

- with non-polarized LED microcircuits (CIL) to operate under a.c. and/or d.c. and to detect the blow-out status of the fuse
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in beige RAL 1001 colour



(\*\*) The terminal blocks are equipped with a hole suited for the sealing of the lever or for the insertion of a rod for the simultaneous opening of the lever of adjoining terminal blocks.



The terminal blocks are provided with a lever suited to house an **F5** type  $\varnothing 5 \times 20$  mm fuse for terminal block type SF0.4 and  $\varnothing 6.3 \times 32$  mm fuse for terminal block type FPL.10. The non-polarised printed **microcircuits** are inserted in an appropriate housing in the lever. The blow-out status of the fuse ignites the LED. Various versions for different voltages are available.



CIL... circuit

(\*) value referred to the insulating characteristics of the terminal block

beige version	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

SFO.4/C12	Cat. No.	SF812
with 12V non-polarized LED circuit		
SFO.4/C24	Cat. No.	SF824
with 24V non-polarized LED circuit		
for $\varnothing 5 \times 20$ mm fuse and LED circuit		
4		
0,2 ÷ 6		
0,2 ÷ 6		
4 - WP40/16		
800 V (*) / 6,3 A max / A4		
250 V / 20 A / 20-12 AWG / 4,4 lb.in.		
-		
6 kV (*) / 3		
11		
0,8 / 1,2		
59 / 73 / 8		
67 / 73 / 8		
62 / 73 / 8		

SFO.4/C48	Cat. No.	SF848
with 48V non-polarized LED circuit		
SFO.4/C115	Cat. No.	SF815
with 115V non-polarized LED circuit		
SFO.4/C230	Cat. No.	SF823
with 230V non-polarized LED circuit		
for $\varnothing 5 \times 20$ mm fuse and LED circuit		
4		
0,2 ÷ 6		
0,2 ÷ 6		
4 - WP40/16		
800 V (*) / 6,3 A max / A4		
250 V / 20 A / 20-12 AWG / 7 lb.in.		
-		
6 kV (*) / 3		
11		
0,8 / 1,2		
59 / 85 / 8		
67 / 85 / 8		
62 / 85 / 8		

FPL.10/C12	Cat. No.	FP912
with 12V non-polarized LED circuit		
FPL.10/C24	Cat. No.	FP924
with 24V non-polarized LED circuit		
FPL.10/C48	Cat. No.	FP948
with 48V non-polarized LED circuit		
FPL.10/C115	Cat. No.	FP915
with 115V non-polarized LED circuit		
FPL.10/C230	Cat. No.	FP923
with 230V non-polarized LED circuit		
for $\varnothing 6,3 \times 32$ mm fuse and LED circuit		
10		
1,5 ÷ 16		
1,5 ÷ 16		
10 - WP100/21		
800 V (*) / 10 A / B6		
300 V / 15 A / 20-6 AWG / 7 lb.in.		
-		
6 kV (*) / 3		
17		
1,2 / 1,9		
71 / 63 / 12		
79 / 63 / 12		
75 / 63 / 12		

### APPROVALS

Approvals referred to the standard version (see page 32)

Approvals referred to the standard version (see page 32)

Approvals referred to the standard version (see page 36)

ACCESSORIES	
End sections	beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Miniature fuse	$\varnothing 5 \times 20$ mm
MSM handle	
LED circuit	<b>non-polarized</b>
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
SFO/PT	SF401
PM/90/2 poles	PM902
PM/90/3 poles	PM903
PM/90/5 poles	PM905
PM/90/10 poles	PM900
25	
PMP/20	PMP20
CPM/20	CPM20
DFU/7	DU07..
-	
PSD/J	PD014
SDD/1	DD001
CNU/8/51	NU0851
F5	FN...
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PRO01
PR/DIN/AS same with slots	PRO04
PR/DIN/AL of aluminium	PRO02
PR/3/AC for PR/DIN and PR/3	PRO03
PR/3/AS same with slots	PRO05


Type	Cat. No.
SFO/PT	SF401
PM/90/2 poles	PM902
PM/90/3 poles	PM903
PM/90/5 poles	PM905
PM/90/10 poles	PM900
25	
PMP/20	PMP20
CPM/20	CPM20
DFU/7	DU07..
-	
PSD/J	PD014
SDD/1	DD001
CNU/8/51	NU0851
F5	FN...
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PRO01
PR/DIN/AS same with slots	PRO04
PR/DIN/AL of aluminium	PRO02
PR/3/AC for PR/DIN and PR/3	PRO03
PR/3/AS same with slots	PRO05

Type	Cat. No.
-	
PM/90/2 poles	PM902
PM/90/3 poles	PM903
PM/90/5 poles	PM905
PM/90/10 poles	PM900
25	
PMP/20	PMP20
CPM/20	CPM20
DFU/6	DU06..
-	
PSD/J	PD014
SDD/1	DD001
CNU/8/51	NU0851
-	
MSM (6 elements)	FC103
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PRO01
PR/DIN/AS same with slots	PRO04
PR/DIN/AL of aluminium	PRO02
PR/3/AC for PR/DIN and PR/3	PRO03
PR/3/AS same with slots	PRO05

# Disconnect

## with UL94V-0 polyamide insulating body

- disconnect with special connections
- possibility to perform cross-connections
- available in standard (grey RAL 7042 and beige RAL 1001 colours) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions
- universal mounting onto both PR/DIN and PR/3 type rails - acc. to IEC 60715 Std., "G32" and "TH/35" types



Opening of the link blade


The /GR tag indicates the grey colour version.




with cross-connection possibility and suited to house a  $\varnothing$  2.3 mm test plug, only in the slot of the cross-connection



with cross-connection possibility and suited to house a  $\varnothing$  2.3 mm test plug, in the slot of the cross-connection or in the head of the tightening screws



with 1 screw and 1 solder connection, 4 x 0.8 mm



(\*) value referred to the staggered position of the lugs (A or B)

grey version	
beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

MPS.2/SW/GR	Cat. No. MP120GR
MPS.2/SW	Cat. No. MP120
MPS.2/SW (Ex)i	Cat. No. MP130
disconnect with cross-connection possibility	2,5
0,2 ÷ 4	
0,2 ÷ 4	
2,5 - WP25/14	
630 V / 18 A / A3	
600 V / 20 A / 20-12 AWG / 5,5 lb.in	
-	
6 kV / 3	
8	
0,4 / 0,8	
43 / 45 / 5,5	
51 / 45 / 5,5	
47 / 45 / 5,5	

MPS.2/SWP/GR	Cat. No. MP710GR
MPS.2/SWP	Cat. No. MP710
disconnect with cross-connection possibility	2,5
0,2 ÷ 4	
0,2 ÷ 4	
2,5 - WP25/14	
630 V / 18 A / A3	
600 V / 20 A / 20-12 AWG / 5,5 lb.in	
-	
6 kV / 3	
8	
0,4 / 0,8	
43 / 45 / 5,5	
51 / 45 / 5,5	
47 / 45 / 5,5	

MPS.2/SV/GR	Cat. No. MP220GR
MPS.2/SV	Cat. No. MP220
disconnect lever with 1 screw and 1 solder connect.	2,5
0,2 ÷ 4	
0,2 ÷ 4	
2,5 - WP25/14	
500 V (*) / 18 A / A3	
300 V / 20 A / 20-12 AWG / 5,5 lb.in	
-	
4 kV / 3	
8	
0,4 / 0,8	
43 / 60 / 5,5	
51 / 60 / 5,5	
47 / 60 / 5,5	

### APPROVALS



+ other approvals referred to MPS.2/SW standard version



### ACCESSORIES

End sections	grey beige blue
Permanent cross connection (pre-assembled)	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Cover for cross-connection	rosso, blu o bianco
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
MPS.2/PT/GR	MP121GR
MPS.2/PT	MP121
MPS.2/PT (Ex)i	MP131
PM/91/2 poles	PM912
PM/91/3 poles	PM913
PM/91/5 poles	PM915
PM/91/10 poles	PM910
POS/91	POS91
PMP/01	PMP01
CPM/11 (CPX/11)	CPM11 (CPX11)
DFU/2	DU02..
-	
PSD/K	PD011
SDD/1	DD001
-	
PRP/5	PRP05
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BT0 for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
MPS.2/PT/GR	MP121GR
MPS.2/PT	MP121
PM/91/2 poles	PM912
PM/91/3 poles	PM913
PM/91/5 poles	PM915
PM/91/10 poles	PM910
POS/91	POS91
PMP/01	PMP01
CPM/11	CPM11
DFU/2	DU02..
-	
PSD/K	PD011
SDD/1	DD001
-	
PRP/5	PRP05
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BT0 for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
MPS.2/PT/GR	MP121GR
MPS.2/PT	MP121
PM/91/2 poles	PM912
PM/91/3 poles	PM913
PM/91/5 poles	PM915
PM/91/10 poles	PM910
POS/91	POS91
PMP/01	PMP01
CPM/11	CPM11
DFU/2	DU02..
-	
PSD/K	PD011
SDD/1	DD001
-	
PRP/5	PRP05
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BT0 for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

# Disconnect

## with UL94V-0 polyamide insulating body

- disconnect with special connections
- possibility to perform cross-connections
- available in standard (grey RAL 7042 and beige RAL 1001 colours) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- "Easy Bridge" system: multi-pole cross-connection without the need of additional protection



with 1 screw and 1 solder connection,  
4 x 0.8 mm

PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING

Terminal block	Jumper	Insulation voltage in the above configurations (V)			
MPS.4	PTC/4	400	400	400	400
DSS.4	PTC/4	400	400	400	400

The /GR tag indicates the grey colour version.

grey version	
beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

MPS.4/GR	
Cat. No.	MP950GR
MPS.4	
Cat. No.	MP950
MPS.4/SW (Ex)i	
Cat. No.	MP960
disconnect lever	4
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
400 V / 24 A / A4	
600 V / 24 A / 26-10 AWG / 4,4 lb.in	
6 kV / 3	
9	
0,5 / 1,2	
47 / 47 / 6	
55 / 47 / 6	
51 / 47 / 6	

MPS.4/VS	
Cat. No.	MP930
disconnect lever with 1 screw and 1 solder connect.	4
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
400 V / 20 A / A4	
600 V / 24 A / 26 ÷ 10 AWG / 5,5 lb.in	
4 kV / 3	
9	
0,5 / 1,2	
47 / 47 / 6	
55 / 47 / 6	
51 / 47 / 6	

DSS.4/GR	
Cat. No.	DS400GR
DSS.4	
Cat. No.	DS400
2 levels, with upper disconnect level	4
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
400 V / 24-32 A (*) / A4	
300 V / 24-32 A / 26-10 AWG / 4,4 lb.in	
4 kV / 3	
9	
0,5 / 1,2	
68 / 78 / 6	
75 / 78 / 6	
72 / 78 / 6	

### APPROVALS



other approvals referred to MPS.4 standard version

ACCESSORIES	
End sections	grey beige blue
Permanent cross connection (pre-assembled) (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Cover for cross-connection	red, blue or white
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
MPS.4/PT/GR	MP901GR
MPS.4/PT	MP901
MPS.4/PT (Ex)i	MP902
PTC/4/02 poles	PTC0402
PTC/4/03 poles	PTC0403
PTC/4/05 poles	PTC0405
PTC/4/10 poles	PTC0410
PTC/4/00 (42 poles)	PTC0400
32	
PTC/SP	PTC0990
-	
DFU/3	DU03..
DFM/500	DF500
-	
CNU/8/61	NU0861
-	
CNU/8/61	NU0861
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
-	
MPS.4/PT	MP901
PTC/4/02 poles	PTC0402
PTC/4/03 poles	PTC0403
PTC/4/05 poles	PTC0405
PTC/4/10 poles	PTC0410
PTC/4/00 (42 poles)	PTC0400
32	
PTC/SP	PTC0990
-	
DFU/3	DU03..
DFM/500	DF500
-	
CNU/8/61	NU0861
-	
CNU/8/61	NU0861
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005


Type	Cat. No.
DSS/PT/GR	DS301GR
DSS/PT	DS301
PTC/4/02 poles	PTC0402
PTC/4/03 poles	PTC0403
PTC/4/05 poles	PTC0405
PTC/4/10 poles	PTC0410
PTC/4/00 (42 poles)	PTC0400
32	
PTC/SP	PTC0990
-	
DFU/7	DU07..
DFM/500	DF500
-	
CNU/8/61	NU0861
-	
CNU/8/61	NU0861
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

(\*) values referred to the upper and lower conducting body, respectively

# Disconnect

## with UL94V-0 polyamide insulating body

- disconnect by means of a brass cylinder to be inserted in the lever
- disconnect with special connections
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours

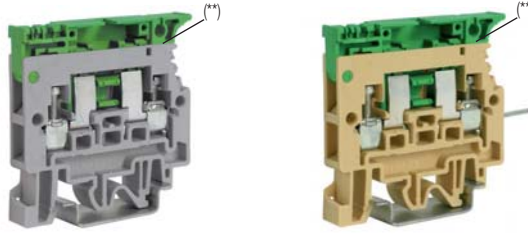

(\*\*) Both terminal blocks are equipped with a hole suited for the sealing of the lever or for the insertion of a rod for the simultaneous opening of the lever of adjoining terminal blocks

1 screw and 1 4 x 0.8 mm solder connection



Ø 5 x 20 mm CO/5 conducting element  
- in tin plated brass to be inserted in the lever

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>SFR.4/GR</b>	Cat. No. <b>SF900GR</b>
<b>SFR.4</b>	Cat. No. <b>SF900</b>
<b>SFR.4 (Ex)i</b>	Cat. No. <b>SF850</b>
<b>TECHNICAL CHARACTERISTICS</b>	
disconnect	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
800 V / 20 A (con CO/5) / A4	
600 V / 6,3 A / 20-12 AWG / 4,4 lb.in	
-	
6 kV / 3	
11	
0,5 / 1,2	
52 / 52 / 8	
60 / 52 / 8	
56 / 52 / 8	

<b>SFR.4/VS/GR</b>	Cat. No. <b>SF910GR</b>
<b>SFR.4/VS</b>	Cat. No. <b>SF910</b>
<b>TECHNICAL CHARACTERISTICS</b>	
disconnect, with solder lug	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
400 V / 15 A (con CO/5) / A4	
-	
4 kV / 3	
11	
0,5 / 1,2	
52 / 65 / 8	
60 / 65 / 8	
56 / 65 / 8	

### APPROVALS



+ other approvals referred to standard version



<b>ACCESSORIES</b>	
End sections	grey beige blue
Permanent cross connection (pre-assembled)	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Manopola di manovra	
Brass conducting cylinder	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>SFR.4/PT/GR</b>	SF701GR
<b>SFR.4/PT</b>	SF701
<b>SFR.4/PT (Ex)i</b>	SF801
-	
-	
-	
-	
<b>DFU/3</b>	DU03..
-	
-	
-	
-	
-	
-	
<b>CO/5</b>	VL103
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005




Type	Cat. No.
<b>SFR.4/PT/GR</b>	SF701GR
<b>SFR.4/PT</b>	SF701
-	
-	
-	
-	
<b>DFU/3</b>	DU03..
-	
-	
-	
-	
-	
-	
<b>CO/5</b>	VL103
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005



# Disconnect

## with UL94V-0 polyamide insulating body

- disconnect by means of a brass conducting element to be inserted in the lever
- possibility to perform cross-connections
- available in standard (grey RAL 7042 and beige RAL 1001 colours) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types



(\*\*) Both terminal blocks are equipped with a hole suited for the sealing of the lever or for the insertion of a rod for the simultaneous opening of the lever of adjoining terminal blocks

Please refer to the table on page 136 in order to determine the insulation voltage of the different PTC connection diagrams

with possibility to perform cross connections both upstream and downstream the disconnection point



∅ 5 x 20 mm CO/5 conducting element  
- in tin plated brass to be inserted in the lever

The /GR tag indicates the grey colour version.

grey version	
beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

SFO.4/GR	
Cat. No.	SF400GR
SFO.4	
Cat. No.	SF400
SFO.4 (Ex)i	
Cat. No.	SF600
disconnect	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
800 V / 16 A (with CO/5) / A4	
600 V / 6,3 A / 20-12 AWG / 7 lb.in.	
-	
6 KV / 3	
11	
0,5 / 1,2	
59 / 73 / 8	
67 / 73 / 8	
62 / 73 / 8	

SFO.4/VS	
Cat. No.	SF410
disconnect with solder lug	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
800 V / 15 A (with CO/5) / A4	
-	
4 KV / 3	
11	
0,5 / 1,2	
59 / 85 / 8	
67 / 85 / 8	
63 / 85 / 8	

SFR.6/M/GR	
Cat. No.	SR500GR
SFR.6/M	
Cat. No.	SR500
SFR.6/M (Ex)i	
Cat. No.	SR600
disconnect	
6	
0,2 ÷ 10	
0,2 ÷ 10	
4 - WP60/20	
630 V / 19 A (with CO/5) / A5	
600 V / 6,3 A / 20-8 AWG / 13 lb.in.	
-	
6 KV / 3	
11	
0,8 / 1,4	
59 / 79 / 10	
67 / 79 / 10	
63 / 79 / 10	

### APPROVALS



approvals referred to SFO.4 standard version



ACCESSORIES	
End sections	grey beige blue
Permanent cross connection (pre-assembled) (*) intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
MSM handle	
Brass conducting cylinder	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
SFO/PT/GR	SF401GR
SFO/PT	SF401
SFO/PT (Ex)i	SF601
PM/90/2 poles	PM902
PM/90/3 poles	PM903
PM/90/5 poles	PM905
PM/90/10 poles	PM900
24	
-	
PMP/20	PMP20
CPM/20	CPM20
DFU/7	DU07..
-	
PSD/J	PD014
SDD/1	DD001
-	
-	
CO/5	VL103
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005


Type	Cat. No.
-	
SFO/PT	SF401
-	
PM/90/2 poles	PM902
PM/90/3 poles	PM903
PM/90/5 poles	PM905
PM/90/10 poles	PM900
25	
-	
PMP/20	PMP20
CPM/20	CPM20
DFU/7	DU07..
-	
PSD/J	PD014
SDD/1	DD001
-	
-	
CO/5	VL103
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
SFR.6/PT/GR	SR301GR
SFR.6/PT	SR301
SFR.6/PT (Ex)i	SR401
PTC/20/02 poles (*)	PTC2002
PTC/20/03 poles (*)	PTC2003
PTC/20/05 poles (*)	PTC2005
PTC/20/10 poles (*)	PTC2010
PTC/20/00 (25 poles) (*)	PTC2000
25	
-	
-	
-	
DFU/7	DU07..
DFM/300	DF300
-	
-	
SDD/1	DD001
-	
-	
CO/5	VL103
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
PR/3/AC for PR/DIN and PR/3	PR003
PR/3/AS same with slots	PR005


# Disconnect

## with UL94V-0 polyamide insulating body

- disconnect by means of a brass cylinder to be inserted in the lever
- slide link disconnect
- possibility to perform cross-connections
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours



Please refer to the table on page 136 in order to determine the insulation voltage of the different PTC connection diagrams



Ø 6.3 x 32 mm SFC/CO conducting element  
- in tin plated brass to be inserted in the lever

SCB.4 terminal blocks with short-circuit plates and test plugs



The /GR tag indicates the grey colour version.

grey version	
beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

SFR.6/GR	
Cat. No.	SR300GR
SFR.6	
Cat. No.	SR300
SFR.6 (Ex)i	
Cat. No.	SR400
disconnect	6
0,2 ÷ 10	
0,2 ÷ 10	
6 - WP60/20	
630 V / 33 A (with conducting element) / A5	
600 V / 10 A / 20-8 AWG / 13 lb.in	
-	
6 KV / 3	
11	
0,8 / 1,4	
59 / 79 / 10	
67 / 79 / 10	
63 / 79 / 10	

FPC.10	
Cat. No.	FP100
disconnect	10
1,5 ÷ 16	
1,5 ÷ 16	
10 - WP100/21	
800 V / 20 A (with SFC/CO) / B6	
600 V / 15 A / 20-6 AWG / 7 lb.in	
-	
6 KV / 3	
17	
1,2 / 1,9	
70 / 63 / 12	
74 / 63 / 12	
78 / 63 / 12	

SCB.4/GR	
Cat. No.	SB300GR
SCB.4	
Cat. No.	SB300
disconnect by slide-link	4
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
800 V / 32 A / A4	
600 V / 20 A / 20-12 AWG / 4,4 lb.in.	
-	
8 KV / 3	
9	
0,5 / 1,2	
44 / 58 / 6,5	
52 / 58 / 6,5	
48 / 58 / 6,5	

### APPROVALS



ACCESSORIES	
End sections	grey beige blue
Permanent cross connection (pre-assembled) (* intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Cross-connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Short-circuit plate	between 2 adjoining terminal blocks between 4 adjoining terminal blocks
Numbering strip	
Brass conducting cylinder	
Screw and sleeve for short circuit plates	
MSM handle	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
SFR.6/PT/GR	SR301GR
SFR.6/PT	SR301
SFR.6/PT (Ex)i	SR401
PTC/20/02 poles (*)	PTC2002
PTC/20/03 poles (*)	PTC2003
PTC/20/05 poles (*)	PTC2005
PTC/20/10 poles (*)	PTC2010
PTC/20/00 (25 poles) (*)	PTC2000
25	
-	
PTC/SP	PTC0990
-	
DFU/7	DU07..
DFM/300	DF300
-	
SDD/1	DD001
-	
-	
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PRO01
PR/DIN/AS same with slots	PRO04
PR/DIN/AL of aluminium	PRO02
PR/3/AC for PR/DIN and PR/3	PRO03
PR/3/AS same with slots	PRO05

Type	Cat. No.
-	
-	
-	
-	
-	
DFU/6	DU06..
-	
-	
SDD/2	DD002
-	
-	
SFC/CO	FC102
-	
MSM (6 elements)	FC103
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PRO01
PR/DIN/AS same with slots	PRO04
PR/DIN/AL of aluminium	PRO02
PR/3/AC for PR/DIN and PR/3	PRO03
PR/3/AS same with slots	PRO05

Type	Cat. No.
SCB.4/PT/GR	SB301GR
SCB.4/PT	SB301
PM/40/2 poles	PM402
PM/40/3 poles	PM403
PM/40/5 poles	PM405
PM/40/10 poles	PM410
32	
POS/12	POS12
-	
PMP/42	PMP42
CPM/12	CPM12
DFU/3	DU03..
-	
PSD/A	PD001
SDD/6-SDD/1	DD006-DD001
SCB.4/PO/2	SB303
SCB.4/PO/4	SB304
CNU/8/51	NU0851
-	
SCB.4/CPM	SB305
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PRO01
PR/DIN/AS same with slots	PRO04
PR/DIN/AL of aluminium	PRO02
PR/3/AC for PR/DIN and PR/3	PRO03
PR/3/AS same with slots	PRO05

# Terminal blocks for test and measurement circuits

with **UL94V-0 polyamide insulating body**

- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types

In SCB.6 type terminal block, the use of special cross-connections, formed by

**SCB/6/PO/2** (between 2 adjoining terminal blocks)



or **SCB/6/PO/4** (between 4 adjoining terminal blocks)



and by the relevant **SCB/6/CPM** shunting screws





allow the simultaneous earth connection of the current transformers connected to the terminal blocks themselves, guaranteeing the correct operational sequence. In fact such cross connections, in opened position, avoid the translation on the slide links, already connected in an accident prevention position from the outside; they do not require the insertion of further partitions to separate them from other adjoining cross-connections or terminal blocks, due to the special shape of the insulating body of the terminal block itself.

SCB.6 type terminal blocks have also the possibility to house, upstream and downstream the disconnection, sockets for test plugs, suitable for the withdraw of signals.

In particular the shunts can take place:

- on **SCB/CPM** shunting screws of the short-circuit plates
- on **PSD/P** socket to be screwed directly into the conducting body of the terminal block, in order to perform the shunting function.

The slide-link is formed by two guides, held together by a screw inserted in a glass-shape collar, which allows the elastic blocking and the anti-loosening of the slide-link and is provided with a red protective colouring for the easy positioning of the screwdriver during the disconnection and the easy spotting of the slide-link itself.

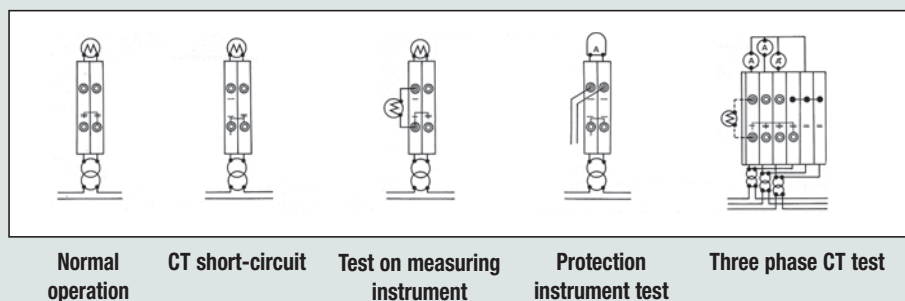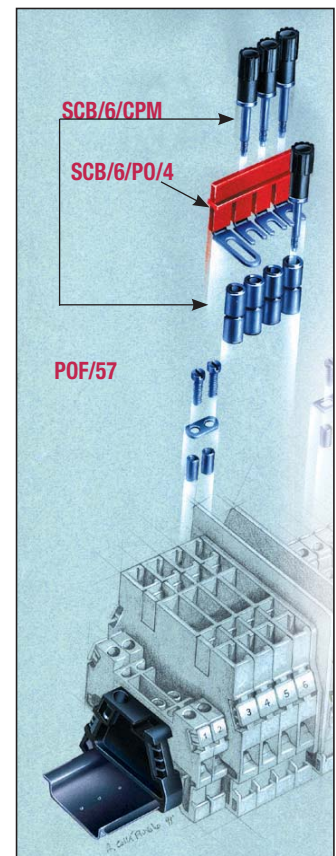


# Terminal blocks for test and measurement circuits

with UL94V-0 polyamide insulating body

- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours



(\*) For the simple cross-connection between adjoining terminal blocks the multiple common bar shall be used together with cross-connection screw and sleeves. The interposing barrier located in the insulating body of the terminal block shall be removed with the aid of a cutter



Disconnect test terminal block that allows longitudinal and transversal disconnection. Configuration provided with **test plug socket** downstream and upstream the slide link, conforming to ENEL LV27/3 specification



Disconnect test terminal block that allows longitudinal and transversal disconnection. Configuration provided with **test plug socket** upstream and a **short circuit sleeve downstream the slide link** (for short circuit plates type SCB/6/PO/2 or SCB/6/PO/4, supplied separately), conforming to ENEL LV27/2 specification

The **/GR** tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section (mm <sup>2</sup> )	6
connecting capacity	
flexible (mm <sup>2</sup> )	0,5 ÷ 10
rigid (mm <sup>2</sup> )	0,5 ÷ 10
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	6 - WP60/20
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 41 A / A5
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	600 V / 47 A / 20-8 AWG / 13,3 lb.in.
rated impulse withstand voltage / pollution degree	8 KV / 3
insulation stripping length (mm)	12
tightening torque value (test / max) (Nm)	0,8 / 1,4
height / width / thickness TH/35 7,5 mm	65 / 69 / 8
height / width / thickness TH/35 15 mm	73 / 69 / 8
height / width / thickness G32	68 / 69 / 8

## APPROVALS

<b>ACCESSORIES</b>	
End sections	grey beige blue
Permanent cross connection (pre-assembled) (*) intrinsically IPXXB protected once mounted)	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Cover for cross-connection	
Short-circuit plate	between 2 adjoining terminal blocks between 4 adjoining terminal blocks
Brass conducting cylinder	
Screw and sleeve	
Screw and sleeve with red socket	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

<b>SCB.6/GR</b>	
Cat. No.	<b>SB200GR</b>
<b>SCB.6</b>	
Cat. No.	<b>SB200</b>
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
disconnect by slide-link	
rated cross-section (mm <sup>2</sup> )	6
connecting capacity	
flexible (mm <sup>2</sup> )	0,5 ÷ 10
rigid (mm <sup>2</sup> )	0,5 ÷ 10
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	6 - WP60/20
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 41 A / A5
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	600 V / 47 A / 20-8 AWG / 13,3 lb.in.
rated impulse withstand voltage / pollution degree	8 KV / 3
insulation stripping length (mm)	12
tightening torque value (test / max) (Nm)	0,8 / 1,4
height / width / thickness TH/35 7,5 mm	65 / 69 / 8
height / width / thickness TH/35 15 mm	73 / 69 / 8
height / width / thickness G32	68 / 69 / 8

<b>ACCESSORIES</b>	
Type	Cat. No.
<b>SCB/6/PT/GR</b>	SB201GR
<b>SCB/6/PT</b>	SB201
-	-
<b>POF/57</b>	POF57
-	-
<b>PMP/13</b>	PMP13
<b>CPM/57</b>	CPM57
<b>DFU/6</b>	DU06..
-	-
<b>PSD/P</b>	PD015
<b>SDD/2</b>	DD002
-	-
<b>SCB/6/PO/2</b>	SB203
<b>SCB/6/PO/4</b>	SB204
<b>SFC/CO</b>	FC102
<b>SCB/6/CPM</b>	SB205
<b>SCB/6/CPM/R</b>	SB205R
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

<b>SCB.6/DD/GR</b>	
Cat. No.	<b>SB210GR</b>
<b>SCB.6/DD</b>	
Cat. No.	<b>SB210</b>
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
disconnect by slide-link special configuration for voltmetric circuits	
rated cross-section (mm <sup>2</sup> )	6
connecting capacity	
flexible (mm <sup>2</sup> )	0,5 ÷ 10
rigid (mm <sup>2</sup> )	0,5 ÷ 10
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	6 - WP60/20
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 41 A / A5
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	-
rated impulse withstand voltage / pollution degree	8 KV / 3
insulation stripping length (mm)	12
tightening torque value (test / max) (Nm)	0,8 / 1,4
height / width / thickness TH/35 7,5 mm	76 / 69 / 8
height / width / thickness TH/35 15 mm	84 / 69 / 8
height / width / thickness G32	79 / 69 / 8


<b>ACCESSORIES</b>	
Type	Cat. No.
<b>SCB/6/PT/GR</b>	SB201GR
<b>SCB/6/PT</b>	SB201
-	-
<b>POF/57</b>	POF57
-	-
<b>PMP/13</b>	PMP13
<b>CPM/57</b>	CPM57
<b>DFU/6</b>	DU06..
-	-
<b>PSD/P</b>	PD015
<b>SDD/2</b>	DD002
-	-
<b>SCB/6/PO/2</b>	SB203
<b>SCB/6/PO/4</b>	SB204
<b>SFC/CO</b>	FC102
<b>SCB/6/CPM</b>	SB205
<b>SCB/6/CPM/R</b>	SB205R
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

<b>SCB.6/CD/GR</b>	
Cat. No.	<b>SB220GR</b>
<b>SCB.6/CD</b>	
Cat. No.	<b>SB220</b>
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
disconnect by slide-link special configuration for amperometric circuits	
rated cross-section (mm <sup>2</sup> )	6
connecting capacity	
flexible (mm <sup>2</sup> )	0,5 ÷ 10
rigid (mm <sup>2</sup> )	0,5 ÷ 10
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	6 - WP60/20
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 41 A / A5
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	-
rated impulse withstand voltage / pollution degree	8 KV / 3
insulation stripping length (mm)	12
tightening torque value (test / max) (Nm)	0,8 / 1,4
height / width / thickness TH/35 7,5 mm	77 / 69 / 8
height / width / thickness TH/35 15 mm	85 / 69 / 8
height / width / thickness G32	80 / 69 / 8

<b>ACCESSORIES</b>	
Type	Cat. No.
<b>SCB/6/PT/GR</b>	SB201GR
<b>SCB/6/PT</b>	SB201
-	-
<b>POF/57</b>	POF57
-	-
<b>PMP/13</b>	PMP13
<b>CPM/57</b>	CPM57
<b>DFU/6</b>	DU06..
-	-
<b>PSD/P</b>	PD015
<b>SDD/2</b>	DD002
-	-
<b>SCB/6/PO/2</b>	SB203
<b>SCB/6/PO/4</b>	SB204
-	-
<b>SCB/6/CPM/R</b>	SB205R
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

# Terminal blocks for test and measurement circuits

## with UL94V-0 polyamide insulating body



Rail assembly with all accessories necessary for the connection of current transformers

- universal mounting onto both PR/DIN and PR/3, "G32" and TH/35 type rails conforming to IEC 60715 Std.
- /DD version (with test plug sockets upstream and downstream the slide link) - for voltmeteric circuits
- /CD version (with test plug sockets upstream and downstream the slide link and short-circuit sleeve upstream the slide-link) - for ammeteric circuits
- available in beige (RAL 1001) and grey (RAL 7042) colours

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>CARATTERISTICHE TECNICHE</b>	
function / type	
rated cross-section (mm <sup>2</sup> )	
connecting capacity	
flexible (mm <sup>2</sup> )	
rigid (mm <sup>2</sup> )	
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge conf. to IEC 60947-7-1	
rated voltage / rated current / AWG / tightening torque value UL	
(Ex e) rated voltage (V)	
rated impulse withstand voltage / pollution degree	
insulation stripping length (mm)	
tightening torque value (test / max) (Nm)	
height / width / thickness TH/35 7,5 mm	
height / width / thickness TH/35 15 mm	
height / width / thickness G32	

<b>SCB.10/GR</b>	Cat. No. <b>SB400GR</b>
<b>SCB.10</b>	Cat. No. <b>SB400</b>
disconnect by slide-link	
10	
0,5 ÷ 16	
0,5 ÷ 16	
10 - WP100/21	
1000 V / 57 A / A4	
-	
8 KV / 3	
14	
0,5 / 1,2	
59,5 / 75 / 10,5	
67,5 / 75 / 10,5	
63,5 / 75 / 10,5	

<b>SCB.10/DD/GR</b>	Cat. No. <b>SB410GR</b>
<b>SCB.10/DD</b>	Cat. No. <b>SB410</b>
disconnect by slide-link special configuration for voltmeteric circuits	
10	
0,5 ÷ 16	
0,5 ÷ 16	
10 - WP100/21	
1000 V / 57 A / A4	
-	
8 KV / 3	
14	
0,5 / 1,2	
59,5 / 75 / 10,5	
67,5 / 75 / 10,5	
63,5 / 75 / 10,5	

<b>SCB.10/CD/GR</b>	Cat. No. <b>SB420GR</b>
<b>SCB.10/CD</b>	Cat. No. <b>SB420</b>
disconnect by slide-link special configuration for amperometric circuits	
10	
0,5 ÷ 16	
0,5 ÷ 16	
10 - WP100/21	
1000 V / 57 A / A4	
-	
8 KV / 3	
14	
0,5 / 1,2	
59,5 / 75 / 10,5	
67,5 / 75 / 10,5	
63,5 / 75 / 10,5	

### APPROVALS

KEMA-KEUR, UL pending

KEMA-KEUR, UL pending

KEMA-KEUR, UL pending

ACCESSORIES	
End sections	grey beige
Permanent cross connection	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Short-circuit plate	between 2 adjoining terminal blocks between 4 adjoining terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>SCB/10/PT/GR</b>	SB401GR
<b>SCB/10/PT</b>	SB401
-	
<b>POF/56</b>	POF56
<b>PMP/13</b>	PMP13
<b>CPM/57</b>	CPM57
<b>DFU/7</b>	DU07..
-	
<b>PSD/P</b>	PD015
<b>SDD/2</b>	DD002
-	
<b>SCX/CPM</b>	SB105
<b>SCX/PO/2</b>	SC103
<b>SCX/PO/4</b>	SC104
<b>CNU/8/51</b>	NU0851
-	
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005


Type	Cat. No.
<b>SCB/10/PT/GR</b>	SB401GR
<b>SCB/10/PT</b>	SB401
-	
<b>POF/56</b>	POF56
<b>PMP/13</b>	PMP13
<b>CPM/57</b>	CPM57
<b>DFU/7</b>	DU07..
-	
<b>PSD/P</b>	PD015
<b>SDD/2</b>	DD002
-	
<b>SCX/CPM</b>	SB105
<b>SCX/PO/2</b>	SC103
<b>SCX/PO/4</b>	SC104
<b>CNU/8/51</b>	NU0851
-	
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>SCB/10/PT/GR</b>	SB401GR
<b>SCB/10/PT</b>	SB401
-	
<b>POF/56</b>	POF56
<b>PMP/13</b>	PMP13
<b>CPM/57</b>	CPM57
<b>DFU/7</b>	DU07..
-	
<b>PSD/P</b>	PD015
<b>SDD/2</b>	DD002
-	
<b>SCX/CPM</b>	SB105
<b>SCX/PO/2</b>	SC103
<b>SCX/PO/4</b>	SC104
<b>CNU/8/51</b>	NU0851
-	
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

# Diode-holders

## with UL94V-0 polyamide insulating body

- for 1 A diodes (1N4001 ÷ 1N4007 types)
- for 3 A diodes (BY 255 type)
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours



(\*\*) hole suited for the sealing of the lever or for the insertion of a rod, in order to perform simultaneous opening of adjoining levers

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section (mm <sup>2</sup> )	
connecting capacity	
flexible (mm <sup>2</sup> )	
rigid (mm <sup>2</sup> )	
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
(Ex e) rated voltage  /  (V)	
rated impulse withstand voltage / pollution degree	
insulation stripping length (mm)	
tightening torque value (test / max) (Nm)	
height / width / thickness  TH/35 7,5 mm	
height / width / thickness  TH/35 15 mm	
height / width / thickness  G32	

### APPROVALS

(\*) value referred to the insulation characteristics of the terminal block

<b>SFR.4/GR</b>	Cat. No. <b>SF900GR</b>
<b>SFR.4</b>	Cat. No. <b>SF900</b>
for 1 A or 3 A diodes	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
800 V (*) / 1 (3) A / A4	
-	
6 KV (*) / 3	
11	
0,5 / 1,2	
52 / 52 / 8	
60 / 52 / 8	
56 / 52 / 8	

The SFR/11A or SFR/3A inserts are supplied as an accessory and are to be mounted in the lever of SFR.4 terminal block, in order to transform it in diode-holder

Approvals referring to standard version (see page 32)

### ACCESSORIES


End sections	grey beige blue
Permanent cross connection	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Miniature fuse	
Conducting element	
Cartridge / insert with 1A diode	
Cartridge / insert with 3A diode	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>SFR/PT/GR</b>	SF701GR
<b>SFR/PT</b>	SF701
<b>SFR/PT (Ex)i</b>	SF801
-	
-	
-	
<b>DFU/3</b>	DU03..
-	
-	
-	
<b>SFR/11A</b> (with 1 A diode)	SF992
<b>SFR/13A</b> (with 3 A diode)	SF993
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

# Diode-holders

## with UL94V-0 polyamide insulating body

- with 1 A / 3 A diodes
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours



(\*\*) hole suited for the sealing of the lever or for the insertion of a rod, in order to perform simultaneous opening of adjoining levers

The terminal block is supplied with the following types of diodes mounted:  
 - 1 A (1N4007 type) SFR.4/D1 A  
 - 3 A (BY 255 type) SFR.4/D3 A

Grey colored version also available:  
 SFR.4/D1A/GR Cat. No. SF901GR

(\*) value referred to the insulation characteristics of the terminal block

standard version	
TECHNICAL CHARACTERISTICS	
function / type	with 1 A or 3 A diodes
rated cross-section (mm <sup>2</sup> )	4
connecting capacity	
flexible (mm <sup>2</sup> )	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V (*) / 1 (3) A / A4
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	-
rated impulse withstand voltage / pollution degree	6 KV (*) / 3
insulation stripping length (mm)	11
tightening torque value (test / max) (Nm)	0,5 / 1,2
height / width / thickness TH/35 7,5 mm	52 / 52 / 8
height / width / thickness TH/35 15 mm	60 / 52 / 8
height / width / thickness G32	56 / 52 / 8

<b>SFR.4/D1A</b>	Cat. No. <b>SF901</b>
<b>SFR.4/D3A</b>	Cat. No. <b>SF903</b>

### APPROVALS

Approvals referring to standard version (see page 32)


ACCESSORIES	
End sections	beige grey
Permanent cross connection	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Miniature fuse	
Conducting element	
Cartridge / insert with 1 A diode	
Cartridge / insert with 3 A diode	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	 

Type	Cat. No.
<b>SFR.4/PT</b>	SF701
<b>SFR/PT/GR</b>	SF701GR
-	
-	
-	
<b>DFU/3</b>	DU03..
-	
-	
<b>F5</b>	FN...
-	
<b>SFR/11A</b> (with 1 A diode)	SF992
<b>SFR/13A</b> (with 3 A diode)	SF993
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

# With electronic components

## with UL94V-0 polyamide insulating body

- with cross-connection possibility
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std.
- 2-level terminal block with bi-directional suppresser diode
- protection against overvoltage, transistor, pulse jamming
- class D protection according to standard DIN VDE 0675. 1989
- overvoltage category <1.5 KV, I (acc. to DIN VDE 0110.1)
- available in grey RAL 7042 and beige RAL 1001 colours

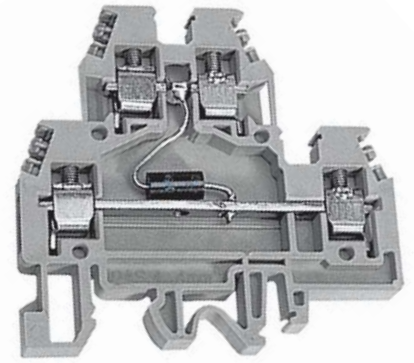

**DAS 4/D...** type terminal blocks, with suppresser diodes inserted as in **diagram 3**, restrict voltage peaks due to surges, electrostatic discharges and inductive load switching and enable the equipment to pass the tests on immunity to the electromagnetic interference defined by the EN 61000-4-2 (electrostatic discharge), EN 61000-4-4 (fast transient/burst) and EN 61000-4-5 (surge test) standards.

The suppresser diodes have a response time (< 1 ns) which is much lower than that of the varistors (approximately 25 ns) and a lower and more accurate response voltage, although compared to varistors they withstand lower discharge currents.

The high precision of the trip voltage and the high speed make them suitable for protecting I/O signal inputs of industrial PLC's, DCS's and PCs against discharge current and voltage interference below 500 A pulse 8/20 ms. This type of interference is usually caused by the normal operation of the actual systems due to switching of high inductive loads, dispersed currents, faults etc.

The range of models available provides a choice between rated voltages suitable for protecting signals with standard voltages of 5 V dc, 12 V dc, 24 V dc and 60 V dc.

The **DAS 4/D...**, connected as shown in **diagram 4**, provides effective protection against differential mode interference for inputs and outputs of industrial PLCs, DCSs and PCs, signal conditioners and sensors, and also for stabilised continuous voltage power supply units of electronic equipment in general.

The **DAS 4/D...**, does not have a signal wiring direction to observe and the positive and negative polarity connection can be carried out at both the upper and lower level.

**Differential mode interference (diagram 5):** generates a strong difference in potential between the two positive and negative signal conductors of the pair or power supply unit and, being applied directly to the input/output circuits of the equipment, always causes a fault in the same.

**Differential mode interference (diagram 6):** generates a strong difference in potential between the two conductors of a signal or power supply unit and the reference earth. It is less destructive than differential mode interference.





**Caution:** the installation of devices for protection against power surges with varistors, diodes and other components between signal and/or power supply conductors and the protection earth reduces the isolation voltage to approximately the value V of breakdown of the discharger used. To carry out isolation tests on the equipment disconnect the dischargers (standard CEI EN60950).

<b>grey version</b>	
<b>beige version</b>	
<b>ACCESSORIES</b>	
End sections	grey beige blue
Permanent cross connection (pre-assembled)	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	red, blue or white
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

<b>DAS.4/6/D.../GR</b>	
<b>DAS.4/6/D...</b>	
<b>Type</b>	<b>Cat. No.</b>
<b>DAS/PT/GR</b>	DS101GR
<b>DAS/PT</b>	DS101
-	
<b>PM/41/2</b> poles	PM412
<b>PM/51/3</b> poles	PM513
<b>PM/51/5</b> poles	PM515
<b>PM/51/10</b> poles	PM510
<b>POS/43</b>	POS43
<b>PMP/58</b>	PMP58
<b>CPM/01</b>	CPM01
<b>DFU/7</b>	DU07..
-	
<b>PSD/A</b>	PD001
<b>SDD/1</b>	DD001
-	
<b>CNU/8/61</b>	NU0861
-	
<b>PRP/5</b>	PRP05
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

**Note for wiring:** wiring of the power surge protection devices greatly influences their actual efficacy and we recommend following the instructions below:

- the protection device must be placed as close as possible to the equipment to be protected;
- the connection wires must be as short and straight as possible, interwoven with each other and with the largest possible cross section;
- the earth conductors between common mode dischargers and the equipotential busbar must be as short as possible and with the largest possible cross section and their path must not be parallel to other conductors. The earth of the protected equipment must be connected to the same earth of its discharger and from there to the general protection earthing.



Differential mode interference. The potential difference is applied between positive and negative poles of the power supply signal.

Common mode interference. The potential difference is applied between the poles of the signal/power supply unit and the earth.



# With electronic components

## with UL94V-0 polyamide insulating body

- with cross-connection possibility on lower level
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- 2-level terminal block with bi-directional suppresser diode
- protection against overvoltage, transistor, pulse jamming
- class D protection according to standard DIN VDE 0675
- overvoltage category <math><1.5\text{ kV, I}</math> (acc. to DIN VDE 0110.1)
- available in grey RAL 7042 and beige RAL 1001 colours



(\* values referred to the characteristics of the connection  
The /GR tag indicates the grey colour version.

grey version	DAS.4/D.../GR
beige version	DAS.4/D...
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	2 levels with suppresser diode
rated cross-section (mm <sup>2</sup> )	4
connecting capacity	
flexible (mm <sup>2</sup> )	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	630 V / 32 A / A4 (*)
rated voltage / rated current / AWG / tightening torque value UL	-
rated impulse withstand voltage / pollution degree	8 kV / 3
insulation stripping length (mm)	9
tightening torque value (test / max) (Nm)	0,5 / 1,2
height / width / thickness	62 / 64 / 6
height / width / thickness	70 / 64 / 6
height / width / thickness	66 / 64 / 6

### APPROVALS



Other approvals referring to DAS.4 standard version

TECHNICAL DATA	DAS.4/D5/GR	DAS.4/D12/GR
	Cat. No. DSD005GR	Cat. No. DSD012GR
Rated voltage	5	12
Vdc max. (Vcc)	6,45	15,2
Vac max.	-	-
Breakdown voltage (1 mA)	6,8 V ± 5%	16 V ± 5%
Max clamping voltage (V)	11	23
Response time	< 1 ns	< 1 ns
Isc pulse 8/20 μs (A)	750	350
C (1 kHz)	5 nF	3 nF

TECHNICAL DATA	DAS.4/D24/GR	DAS.4/D60/GR
	Cat. No. DSD024GR	Cat. No. DSD060GR
Rated voltage	24	60
Vdc max. (Vcc)	28,5	77,9
Vac max.	-	-
Breakdown voltage (1 mA)	30 V ± 5%	82 V ± 5%
Max clamping voltage (V)	41	113
Response time	< 1 ns	< 1 ns
Isc pulse 8/20 μs (A)	160	70
C (1 kHz)	1,5 nF	0,6 nF

# With electronic components

## with UL94V-0 polyamide insulating body

- for overlapped circuits with varistor
- cross-connection possibility on lower level
- protection against overvoltage, transistor, pulse jamming
- class D protection according to DIN VDE 0675
- overvoltage category <2.5 KV, II (acc. to DIN VDE 0110.1)
- available in grey RAL 7042 and beige RAL 1001 colours



**DAS.4V...** type terminal blocks with varistor inserted as in **diagram 1**, restrict voltage peaks due to surges, indirect atmospheric discharges and inductive load switching and enable the equipment to pass the tests on immunity to the electromagnetic interference defined by the standards EN 61000-4-2 (electrostatic discharge), EN 61000-4-4 (fast transient/burst) and EN 61000-4-5 (surge test).

The varistors have a response time (20-25 ns) which is longer than that of the suppresser diodes (< 1 ns) and a higher response voltage, although they withstand much higher discharge currents. The high discharge current makes them suitable for uses with strong transients, with currents up to 4500 A pulse 8/20 ms.



The range of models available provides a choice between rated voltages suitable for protecting both signals and power supply units with standard voltages of 24 V dc and 48 V dc or for power supply voltages of 120 V ac and 230 V ac.

The **DAS.4V...**, connected as shown in diagram 2, provides effective protection against differential mode interference for inputs and outputs of industrial PLC's, DCS's and PC's, signal conditioners and sensors, and also for power supply units of electronic equipment in general.

The **DAS.4V...** does not have a signal wiring direction to observe and the positive and negative polarity connection is carried out at both the upper and lower level.

The **/GR** tag indicates the grey colour version.

<b>grey version</b>	<b>DAS.4/V.../GR</b>
<b>beige version</b>	<b>DAS.4/V...</b>
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	2 levels with varistor
rated cross-section (mm <sup>2</sup> )	4
connecting capacity	
flexible (mm <sup>2</sup> )	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	630 V / 32 A / A4 (*)
rated voltage / rated current / AWG / tightening torque value UL	-
rated impulse withstand voltage / pollution degree	8 KV / 3
insulation stripping length (mm)	9
tightening torque value (test / max) (Nm)	0,5 / 1,2
height / width / thickness TH/35 7,5 mm	62 / 64 / 6
height / width / thickness TH/35 15 mm	70 / 64 / 6
height / width / thickness G32	66 / 64 / 6

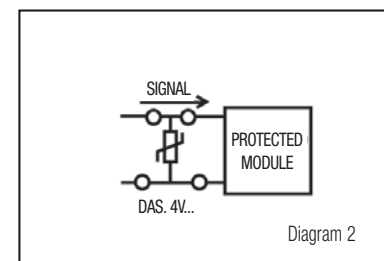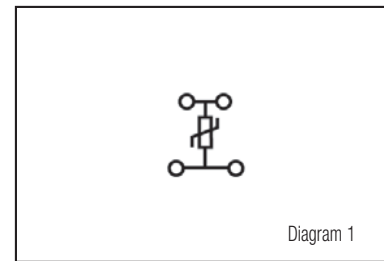

### APPROVALS



Other approvals referring to DAS.4 standard version

TECHNICAL DATA	DAS.4/V24/GR		DAS.4/V48/GR		DAS.4/V120/GR		DAS.4/V230/GR	
	Cat. No.	DSV024GR	Cat. No.	DSV048GR	Cat. No.	DSV120GR	Cat. No.	DSV230GR
	DAS.4/V24		DAS.4/V48		DAS.4/V120		DAS.4/V230	
	Cat. No.	DSV024	Cat. No.	DSV048	Cat. No.	DSV120	Cat. No.	DSV230
Rated voltage	24		48		120		230	
Vdc max. (Vcc)	31		85		180		350	
Vac max.	25 Vac		60 Vac		140 Vac		275 Vac	
Breakdown voltage (1 mA)	39 V ± 10%		100 V ± 10%		220 V ± 10%		430 V ± 10%	
Max clamping voltage (V)	77 V		165 V		360 V		710 V	
Response time	< 25 ns		< 25 ns		< 25 ns		< 25 ns	
Isc pulse 8/20 μs (A)	500		2500		2500		2500	
C (1 kHz)	4600 pF		1650 pF		610 pF		320 pF	

# With electronic components

## with UL94V-0 polyamide insulating body

- for overlapped circuits
- possibility to perform cross-connections on both lower and upper levels (DAS.4/A and DAS. 4/B; other versions only on lower level)
- available in grey RAL 7042 and beige RAL 1001 colours



DAS.4/C terminal block

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS

<b>ACCESSORIES</b>	
End sections	grey beige blue
Permanent cross connection (pre-assembled)	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	red, blue or white
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	


### DAS.4/.../GR

### DAS.4/...


2-level component-holder	4
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
630 V (*) / - / A4	
-	
8 KV / 3	
9	
0,5 / 1,2	
62 / 64 / 6	
70 / 64 / 6	
66 / 64 / 6	

Approval referring to DAS.4 standard version


Type	Cat. No.
DAS/PT/GR	DS101GR
DAS/PT	DS101
-	
PM/41/2 poles	PM412
PM/51/3 poles	PM513
PM/51/5 poles	PM515
PM/51/10 poles	PM510
POS/43	POS43
PMP/58	PMP58
CPM/01	CPM01
DFU/7	DU07..
-	
PSD/A	PD001
SDD/1	DD001
-	
-	
-	
-	
PRP/5	PRP05
CNU/8/61	NU0861
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BTO for PR/3 only	BT003-BT007
PR/DIN/AC of steel	PRO01
PR/DIN/AS same with slots	PRO04
PR/DIN/AL of aluminium	PRO02
PR/3/AC for PR/DIN and PR/3	PRO03
PR/3/AS same with slots	PRO05




Cat. No. DS111GR - DS111




Cat. No. DS112GR - DS112




Cat. No. DS113GR - DS113




Cat. No. DS114GR - DS114




Cat. No. DS115GR - DS115




Cat. No. DS119GR - DS119




Cat. No. DS130GR - DS130



Cat. No. DS120GR - DS120



Cat. No. DS128GR - DS128



Cat. No. DS129GR - DS129

(\*) The voltage and current ratings given for the various versions are based on the various type of components and to their connections.

# With special connections

## with UL94V-0 polyamide insulating body

- with flat push-on tab connections
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in beige RAL 1001 colour



6.3 x 0.8 mm  
flat push-on tab connections  
acc. to standard IEC 60760



6.3 x 0.8 mm  
flat push-on tab connections  
acc. to standard IEC 60760



with 1.6 x 0.8 mm lug  
for wrapped wire connections

**AF0.2/2+2/TPM** Cat. No. AF420  
with 2,4 x 0.8 mm lug for wrapped  
wire connections

beige version	AF0.2/1+1 Cat. No. AF500	AF0.2/2+2 Cat. No. AF400	AF0.2/2+2/TP Cat. No. AF410
<b>(Ex)i version</b>			
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	feed-through with push-on tab connections - separate levels	feed-through with push-on tab connections	feed-through with push-on tab connections and lug
rated cross-section (mm <sup>2</sup> )	2,5	2,5	2,5
connecting capacity			
flexible (mm <sup>2</sup> )	up to 2,5	up to 2,5	up to 2,5
rigid (mm <sup>2</sup> )	-	-	-
rated voltage / rated current / gauge conf. to IEC 60947-7-1	400 V / 20 A / -	630 V / 20 A / -	320 V / 10 A / -
rated voltage / rated current / AWG / tightening torque value UL	300 V / 15 A / -	600 V / 15 A / -	-
(Ex e) rated voltage  /  (V)	-	-	-
rated impulse withstand voltage / pollution degree	4 KV / 3	6 KV / 3	4 KV / 3
insulation stripping length (mm)	-	-	-
tightening torque value (test / max) (Nm)	-	-	-
height / width / thickness  TH/35 7,5 mm	49 / 44 / 6,5	49 / 44 / 6,5	49 / 59 / 6,5
height / width / thickness  TH/35 15 mm	57 / 44 / 6,5	57 / 44 / 6,5	57 / 59 / 6,5
height / width / thickness  G32	52 / 44 / 6,5	52 / 44 / 6,5	52 / 59 / 6,5

### APPROVALS





Approvals referring to terminal block type AF0.2/2+2

ACCESSORIES	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
End sections <span style="float: right;">grey beige blue</span>	AF0/PT	AF201	AF0/PT	AF201	AF0/PT	AF201
Permanent cross connection	-		-		-	
Switchable cross connection	-		-		-	
Multiple common bar 250 mm	-		-		-	
Shunting screw and sleeve	-		-		-	
Coloured partition red, green, white	DFU/1	DU01..	DFU/1	DU01..	DFU/1	DU01..
Cross connection barrier red	-		-		-	
Test plug socket	-		-		-	
Test plug	-		-		-	
Numbering strip	CNU/8/51	NU0851	CNU/8/51	NU0851	CNU/8/51	NU0851
Cover for cross-connection	-		-		-	
Warning plate	-		-		-	
Marking tag printed or blank	CNU/8/51	NU0851	CNU/8/51	NU0851	CNU/8/51	NU0851
End bracket	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005
	BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001
	BT/3-BTO for PR/3 only	BT003-BT007	BT/3-BTO for PR/3 only	BT003-BT007	BT/3-BTO for PR/3 only	BT003-BT007
Mounting rail according to IEC 60715 Std.	PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001
	PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004
	PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002
	PR/3/AC for PR/DIN and PR/3	PR003	PR/3/AC for PR/DIN and PR/3	PR003	PR/3/AC for PR/DIN and PR/3	PR003
	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005

# With special connections

## with UL94V-0 polyamide insulating body

- with flat push-on tab connections
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in grey RAL 7042 and beige RAL 1001 colours (where indicated)



### Cross-connection possibility

6.3 x 0.8 mm, or 2.8 x 0.8 mm, flat push-on tab connections acc. to standard IEC 60760

6.3 x 0.8 mm, or 2.8 x 0.8 mm, flat push-on tab connections acc. to standard IEC 60760

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>PDF.2</b>	
Cat. No.	<b>PF100</b>
<b>TECHNICAL CHARACTERISTICS</b>	
feed-through with push-on tab connections	2,5
up to 2,5	-
630 V / 20 A / -	600 V / 16 A / 20-10 AWG
-	-
6 kV / 3	-
-	-
50 / 57 / 6,5	58 / 57 / 6,5
54 / 57 / 6,5	

<b>FDP.2/GR</b>	
Cat. No.	<b>FD100GR</b>
<b>FDP.2</b>	
Cat. No.	<b>FD100</b>
<b>TECHNICAL CHARACTERISTICS</b>	
feed-through with push-on tab connections	2,5
up to 2,5	-
800 V / 20 A / -	600 V / 16 A / 20-10 AWG
-	-
8 kV / 3	-
-	-
49 / 65,5 / 6,5	57 / 65,5 / 6,5
53 / 65,5 / 6,5	

<b>CVF.4/GR</b>	
Cat. No.	<b>CV100GR</b>
<b>CVF.4</b>	
Cat. No.	<b>CV100</b>
<b>CVF.4 (Ex)i</b>	
Cat. No.	<b>CV200</b>
<b>TECHNICAL CHARACTERISTICS</b>	
feed-through, 1 screw + 3-push-on connections	4
0,2 ÷ 6	0,2 ÷ 6
4 - WP40/16	800 V / 20 A / A4
-	600 V / 20 A / 20-12 AWG / 4,4 lb.in
-	-
8 kV / 3	11
-	-
52 / 48,5 / 6	60 / 48,5 / 6
56 / 48,5 / 6	

### APPROVALS



<b>ACCESSORIES</b>	
End sections	grey beige blue
Permanent cross connection (pre-assembled)	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Cover for cross-connection	
Warning plate	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

<b>Type</b>	<b>Cat. No.</b>
<b>PDF/PT</b>	PF101
-	
-	
-	
<b>DFU/5</b>	DU05..
-	
-	
<b>CNU/8/51</b>	NU0851
-	
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005


<b>Type</b>	<b>Cat. No.</b>
<b>FDP/PT/GR</b>	FD101GR
<b>FDP/PT</b>	FD101
<b>PH/2,5-4</b>	PH100
-	
-	
<b>DFU/5</b>	DU05..
-	
<b>SDD/1</b>	DD001
<b>CNU/8/51</b>	NU0851
-	
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

<b>Type</b>	<b>Cat. No.</b>
<b>CVF/PT/GR</b>	CV101GR
<b>CVF/PT</b>	CV101
<b>CVF/PT (Ex)i</b>	CV201
<b>PM/58/3</b> poles	PM583
<b>PM/58/5</b> poles	PM585
<b>PM/58/10</b> poles	PM580
-	
<b>PMP/58</b>	PMP58
<b>CPM/12</b>	CPM12
<b>DFU/3</b>	DU03..
-	
<b>PSD/A</b>	PD001
<b>SDD/1</b>	DD001
<b>CNU/8/61</b>	NU0861
-	
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005


# With special connections

## with UL94V-0 polyamide insulating body


- with flat push-on tab connections
- with solder lug or wire-wrap lug
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types




**CVF.4/VS2** Cat. No. CV130  
with two 4 x 0.8 mm solder lugs



**CVF.4/VS**  
with 4 x 0.8 mm solder lug



**CVF.4/WW**  
with 1.6 x 0.8 mm wire-wrap lug, horizontally mounted



**CVF.4/TP**  
with 1.6 x 0.8 mm wire-wrap lug, vertically mounted

### beige version

TECHNICAL CHARACTERISTICS	
function / type	feed-through, 1 screw + spec. connections
rated cross-section (mm <sup>2</sup> )	4
connecting capacity	
flexible (mm <sup>2</sup> )	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	250 V / 20 A / A4
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	-
rated impulse withstand voltage / pollution degree	4 kV / 3
insulation stripping length (mm)	11
tightening torque value (test / max) (Nm)	0,5 / 1,2
height / width / thickness TH/35 7,5 mm	52 (+19 per /TP) / 48,5 (68 per /WW - 58 per /VS) / 6
height / width / thickness TH/35 15 mm	60 (+19 per /TP) / 48,5 (68 per /WW - 58 per /VS) / 6
height / width / thickness G32	56 (+19 per /TP) / 48,5 (68 per /WW - 58 per /VS) / 6

<b>CVF.4/VS</b>	Cat. No.	<b>CV110</b>
<b>CVF.4/WW</b>	Cat. No.	<b>CV120</b>
<b>CVF.4/TP</b>	Cat. No.	<b>CV140</b>

### APPROVALS

Approvals referring to terminal block type CVF.4

ACCESSORIES	
End sections	beige blue
Permanent cross connection (pre-assembled)	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Cover for cross-connection	
Warning plate	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>CVF/PT</b>	CV101
-	
<b>PM/40/2</b> poles	PM402
<b>PM/58/3</b> poles	PM583
<b>PM/58/5</b> poles	PM585
<b>PM/58/10</b> poles	PM580
-	
<b>PMP/58</b>	PMP58
<b>CPM/12</b>	CPM12
<b>DFU/3</b>	DU03..
-	
<b>PSD/A</b>	PD001
<b>SDD/1</b>	DD001
<b>CNU/8/61</b>	NU0861
-	
<b>CNU/8/61</b>	NU0861
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005

# CF.12/1+1 multi-pole terminal board

with 6.3 x 0.8 mm flat push-on tab connections (2 for each pole)

- with beige or blue UL94V-0 polyamide insulating body

<b>CF.12/1+1</b> (without end section) Cat. No.	<b>CF100</b>
<b>CF.12/1+1 (Ex)i</b> Cat. No.	<b>CFX10</b>
<b>CF.12/CPT</b> (with end section) Cat. No.	<b>CF900</b>
<b>CF.12/CPT (Ex)i</b> Cat. No.	<b>CFX90</b>

## TECHNICAL CHARACTERISTICS

rated cross-section	2,5 mm <sup>2</sup>
rated current (conf. to IEC 60947-7-1)	20 A
rated voltage (conf. to IEC 60947-7-1)	500 V
rated impulse withstand voltage / pollution degree	6 kV / 3

## ACCESSORIES

<b>Upper end section</b>	of beige polyamide <b>CF/PT</b>
<b>Upper end section</b>	of blue polyamide <b>CF/PT (Ex)i</b>
<b>Upper special end section</b>	of polyamide <b>CF/PTM</b>
<b>Insulating bushing</b>	of beige polyamide <b>CF/BI</b>
<b>M4 threaded tension rods</b>	of zinc-plated steel <b>CF/TR</b>
<b>Nut (bolt)</b>	of polyamide <b>CF/DD</b>


**CF.12/1+1** terminal boards can be mounted independently or overlapped. In both cases the single terminal board or the one placed on top of the assembly shall be closed using a CF/PT end section (4 mm thickness). The fixing to the panel can take place by means of:

- screws of adequate length (**distance between the holes 69.5 mm**)
- **M4 threaded tension rods**


To ensure maximum insulation from earth and a correct mounting of the overlapped terminal boards it is necessary to insert special **CF/BI bushings** in the relevant holes on the insulating bodies. No bushings are required between the terminal board and the end section as this element is already appropriately shaped.

The above mentioned end section has an engraved numbering from 1 to 12 for an easy identification of the poles.

Push-on male connections, completely protected from the exterior and adequately insulated one from another with diaphragms, are made of copper-zinc alloy with high percentage of copper, and are provided with anti-oxidation nickel plating, or on request, silver coating (**CF.12/1+1/AG** Cat. No. CFA10).

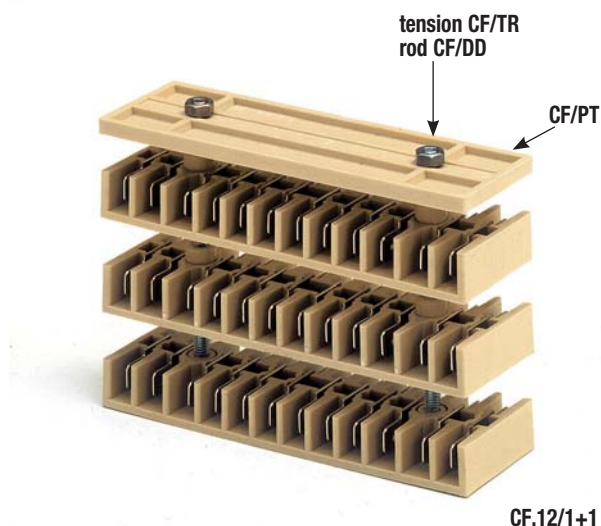


CF.12/1+1

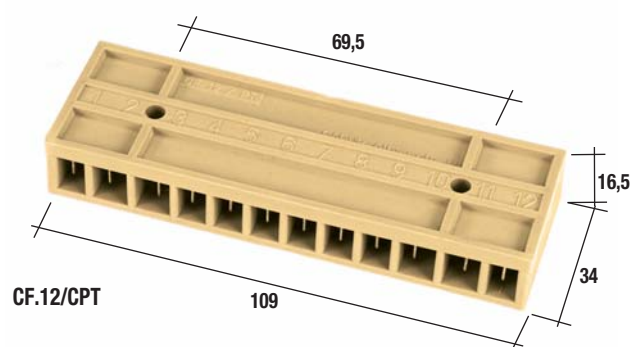


CF.12/CPT

**CF/PTM** (Cat. No. CF301)  
Special end section to be mounted in grooving

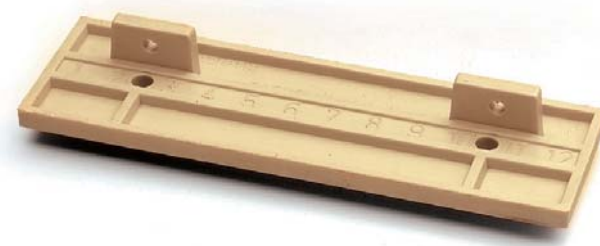


**CF.12/FW/CPT** (Cat. No. CFW90)  
Version equipped with flat push on tab connections on one side and wrapped wire on the other side  
**CF.12/FW/CPT (Ex)i** (Cat. No. CFW99)

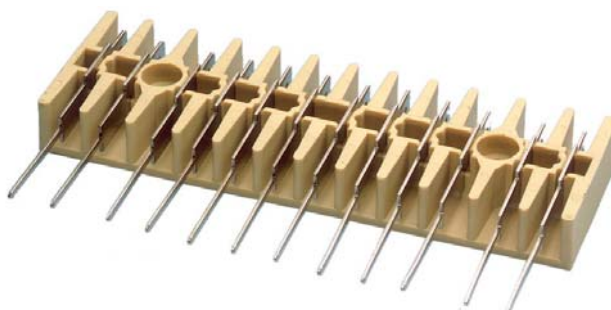

# CF.12/1+1 multi-pole terminal board

con connessioni (2 x polo)  
a spina piatta da 6,3 x 0,8 mm

- with beige or blue UL94V-0 polyamide insulating body

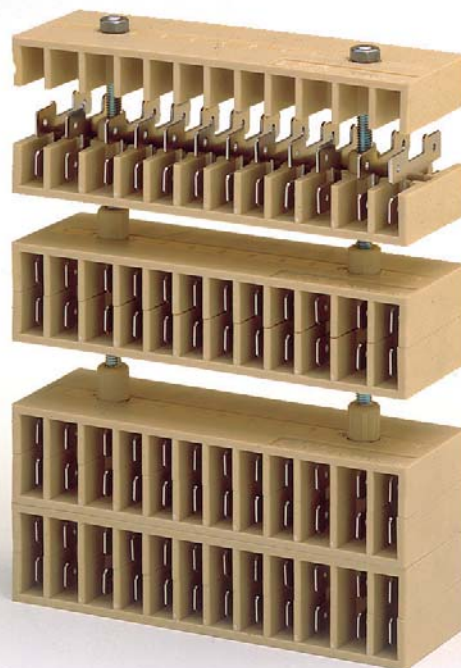

**CF.12/2+2**

Cat. No.

**CF200**

## TECHNICAL CHARACTERISTICS

rated cross-section	2,5 mm <sup>2</sup>
rated current (conf. to IEC 60947-7-1)	20 A
rated voltage (conf. to IEC 60947-7-1)	500 V
rated impulse withstand voltage / pollution degree	6 KV / 3

## ACCESSORIES

Insulating bushing	of polyamide <b>CF/BI</b>
Reduced insulating bushing	of polyamide <b>CF/BI</b>
M4 threaded tension rods	of zinc-plated steel <b>CF/TR</b>
Nut (bolt)	of polyamide <b>CF/DD</b>

**CF.12/2+2** terminal boards can be mounted independently or overlapped. The fixing to the panel can take place by means of:


- screws of adequate length (**distance between the holes 69.5 mm**)
- M4 **threaded tension rods**

To ensure maximum insulation from earth and a correct mounting of the overlapped terminal boards it is necessary to insert special **CF/BI bushings** in the relevant holes on the insulating bodies. To allow a better tightening of the small **CF/DD nuts**, when using threaded tension rods, it is necessary to introduce in the holes of the upper terminal board the reduced **CF/BI bushings**.

**CF.12/2+2** terminal boards have engraved numbering from 1 to 12 for an easy identification of the poles.

Push-on male connections, completely protected from the exterior and adequately insulated one from another with diaphragms, are made of copper-zinc alloy with high percentage of copper, and are provided with anti-oxidation nickel, or on request, silver coating (CF.12/2+2/AG Cat. No. CFA20).


**Note:** a version provided with eight 6.3 x 0.8 mm flat push-on tab connectors is available. **CF.08/2+2** Cat. No. **CF400**

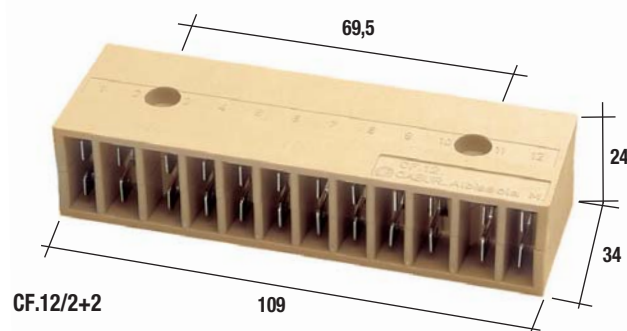



# With special connections

## with UL94V-0 polyamide insulating body



- for thermocouple circuits
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- **CESI 02 ATEX 134 U** Ex e certificate  
I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C
- when rail assemblies are to be manufactured for potentially explosive environments (Ex e) please refer to the indications given on page A14

<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
(Ex e) rated voltage  /	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32


### APPROVALS



<b>ACCESSORIES</b>	
End sections	beige blue
Permanent cross connection	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Cover for cross-connection	
Warning plate	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

<b>TC/PO</b>	Cat. No.	<b>TC500</b>
<b>TC/PO (Ex)i</b>	Cat. No.	<b>TC510</b>
for thermocouple circuits		
-		
thermocouples having 0,8 ÷ 1,3 mm diam.		
800 V / - / -		
600 V / 15 A / 20-14 AWG / 5,5 lb.in.		
500 V / 630 V		
8 KV / 3		
20		
0,4 / 0,8		
47 / 40,5 / 5,5		
55 / 40,5 / 5,5		
51 / 40,5 / 5,5		

<b>Type</b>	<b>Cat. No.</b>
<b>CB2/PT</b>	CB111
<b>CB2/PT (Ex)i</b>	CBX13
-	
-	
-	
<b>DFU/1</b>	DU01..
-	
-	
<b>CNU/8/51</b>	NU0851
-	
-	
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> for PR/DIN and PR/3	PR003
<b>PR/3/AS</b> same with slots	PR005



Terminal block suitable for the connection of any type of conductor for thermocouple circuits. In fact, due to the excellent electrical contact which results, **thermocouple circuits of any type can be wired up without the intervention of any other compensation material.**

Such a solution allows, in addition to the running of one single item, the reduction of points of contact in the complete circuit.

In order to make the connection completely efficient and permanent the range of diameters of the connectable thermocouples must be within the 0.8 and 1.3 mm range.

The thermocouple circuits, even those with different diameters, stripped of their insulating protection for a length of 20 mm. are overlapped in the inside of the terminal block in such a way as to allow the direct flow of thermoelectrical e.m.f. without the intermediary of a metal body, as happens in normal circuits.

With the double clamping, assured by two screws and by the interposition of the pressure plate, the possibility of e.m.f. caused by lack of homogeneity of the contacts is reduced to more or less nothing.

# With special connections

## with UL94V-0 polyamide insulating body



- for 5.08 mm pitch female connectors
- double possibility of PTC – easy bridge multi-pole connection
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., “G32” and “TH/35” types
- available in grey RAL 7042 and beige RAL 1001 colours

(\* ) current on the PCB connector pin

The /GR tag indicates the grey colour version.

<b>grey version</b>	
<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS

<b>VPC.2/GR</b>	Cat. No. <b>VP300GR</b>
<b>VPC.2</b>	Cat. No. <b>VP300</b>
<b>VPC.2 (Ex)i</b>	Cat. No. <b>VP310</b>
1 screw connection and 2 pins for female connectors	
2,5	
0,2 ÷ 4	
0,2 ÷ 4	
2,5 - WP25/14	
320 V / 24-12 (*) A / A3	
600 V / 20 ÷ 14 AWG / 15 A / 5,5 lb.in.	
-	
4 kV / 3	
9 (screw connection)	
0,4 / 0,8 (screw connection)	
51 / 44 / 5,08	
59 / 44 / 5,08	
55 / 44 / 5,08	



<b>ACCESSORIES</b>	
End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Cross-connection identification strip (100 mm)	green
Switchable cross connection	
Diaframma separatore ponti	
Shunting screw and sleeve	
Coloured partition	red, green, white
Hollow partition	grey beige
Test plug socket	
Test plug	
Numbering strip	
Cover for cable lugs	
Flangia	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	


Type	Cat. No.
<b>VPC/PT/GR</b>	VP101GR
<b>VPC/PT</b>	VP101
<b>VPC/PT (Ex)i</b>	VP201
<b>PTC/2/02</b> poles	PTC0202
<b>PTC/2/03</b> poles	PTC0203
<b>PTC/2/05</b> poles	PTC0205
<b>PTC/2/10</b> poles	PTC0210
<b>PTC/2/00</b> (50 poles)	PTC0200
<b>PTC/SP</b>	PTC0990
-	-
<b>DFM/300</b>	DF300
-	-
<b>DFU/5</b>	DU05
<b>DF/VPC/GR</b>	DU02SGR
<b>DF/VPC</b>	DU02S
-	-
<b>CNU/8/51</b>	NU0851
<b>VPC/VT</b>	VP102
<b>VPC/PTF</b>	VP303
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BT0</b> for PR/3 only	BT003-BT007
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING
Insulation voltage in the above configurations (V)					
320	320		320	320	320

Detail with PTC jumpers and barriers





Detail with 5.08 mm female connectors and lug protection covers in up position



Female connectors, 90° - 5,08 mm pitch and with a number of poles from 2 to 16, are available. The connector can be easily inserted until it reaches its blocking position, guaranteeing optimum connection onto the male contact. In such a position the connector it is hooked onto the insulating body of the terminal block by means of a tooth, of which it is equipped.

- |                           |                       |
|---------------------------|-----------------------|
| <b>VPC/F02</b> - 2 poles  | Cat. No. <b>VP902</b> |
| <b>VPC/F03</b> - 3 poles  | Cat. No. <b>VP903</b> |
| <b>VPC/F04</b> - 4 poles  | Cat. No. <b>VP904</b> |
| <b>VPC/F05</b> - 5 poles  | Cat. No. <b>VP905</b> |
| <b>VPC/F06</b> - 6 poles  | Cat. No. <b>VP906</b> |
| <b>VPC/F07</b> - 7 poles  | Cat. No. <b>VP907</b> |
| <b>VPC/F08</b> - 8 poles  | Cat. No. <b>VP908</b> |
| <b>VPC/F09</b> - 9 poles  | Cat. No. <b>VP909</b> |
| <b>VPC/F10</b> - 10 poles | Cat. No. <b>VP910</b> |
| <b>VPC/F11</b> - 11 poles | Cat. No. <b>VP911</b> |
| <b>VPC/F12</b> - 12 poles | Cat. No. <b>VP912</b> |
| <b>VPC/F13</b> - 13 poles | Cat. No. <b>VP913</b> |
| <b>VPC/F14</b> - 14 poles | Cat. No. <b>VP914</b> |
| <b>VPC/F15</b> - 15 poles | Cat. No. <b>VP915</b> |
| <b>VPC/F16</b> - 16 poles | Cat. No. <b>VP916</b> |



For the fixing of the conductor in an even more secure way, it is possible to use connectors provided with locking screws, located on the sides of the connector itself. In this case it is necessary to insert on to both sides of the assembled VPC.2 terminal blocks a **VPC/PTF** (Cat. No. VP103) flange. In the case that an assembly composed in such a way has a flange with external connecting pins, it is necessary to add a **VPC/PT** (Cat. No. VP101) end section, or to remove the external pins with a cutter. For safety reasons, the connectors must not be handled under load. The use of **DF/VPC** (Cat. No. DU015) barrier, for the physical separation of the different groups of terminal blocks, does not avoid the possibility to perform cross-connections.

The terminal block is available also in the version equipped with signal circuit (VPC.2/L024). In this case a common bar (dimension 7 x 1 x 250 mm), for the common return of a LED (red colour - 24 V), must be inserted in the appropriate housing on the side of the group of adjoining terminal blocks and connected by means of a feeding terminal block - VPC.2(Ex)i/D (Cat. No. VPC200). The **VPC.2(Ex)i/D** feeding terminal block is a version of terminal block type VPC.2(Ex)i, equipped with a type 1N4007 diode.

A transparent cover in order to prevent accidental contacts on the pins is supplied as an accessory (**VPC/VT** - Cat. No. VP102) in 10-pole bars; it can be easily separated into the desired number of poles. The cover is inserted by clip fixing in the appropriate housing provided in the insulating body of the terminal block; the insertion point acts as a fulcrum for the rotation of the protection itself from the closed position (guaranteed by a clip) to the open position (for the insertion of the connector). It is manufactured in transparent material in order to ensure visibility of both the type of connection (in closed position) and the LED, in opened position, once the connector is inserted.

# With special connections


## with UL94V-0 polyamide insulating body

- for 5.08 mm pitch female connectors – two levels
- universal mounting onto PR/3 type rails - according to IEC 60715 Std., "TH/35" type
- double possibility of PTC – "Easy Bridge" multi-pole cross connection, on each level
- available in grey RAL 7042 and beige RAL 1001 colours



PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING
Insulation voltage in the above configurations (V)					
320	320		320	320	320

Detail with 5.08 mm female connectors inserted on the two levels, the lug protection covers raised and the PTCs inserted on the two levels.



(\*) current on the PCB connector pin  
The /GR tag indicates the grey colour version.

grey version	
beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>VPD.2/GR</b>	Cat. No. <b>VP500GR</b>
<b>VPD.2</b>	Cat. No. <b>VP500</b>
<b>VPD.2 (Ex)i</b>	Cat. No. <b>VP560</b>
2 level feed-through with 2 screw connections and 2 pins for connectors 2,5	
0,2 ÷ 4	
0,2 ÷ 4	
-	
320 V / 24-12 (*) A / A3	
300 V / 15 A / 26-12 AWG / 3,5 lb.in.	
-	
4 kV / 3	
9	
0,4 / 0,8 (screw connection)	
64 / 74 / 5,08	
72 / 74 / 5,08	
- / - / -	

Female connectors, 90° - 5,08 mm pitch and with a number of poles from 2 to 16, are available. The connector can be easily inserted until it reaches its blocking position, guaranteeing optimum connection onto the male contact. In such a position the connector it is hooked onto the insulating body of the terminal block by means of a tooth, of which it is equipped.

<b>VPC/F02</b> -2 poles	Cat. No. <b>VP902</b>
<b>VPC/F03</b> -3 poles	Cat. No. <b>VP903</b>
<b>VPC/F04</b> -4 poles	Cat. No. <b>VP904</b>
<b>VPC/F05</b> -5 poles	Cat. No. <b>VP905</b>
<b>VPC/F06</b> -6 poles	Cat. No. <b>VP906</b>
<b>VPC/F07</b> -7 poles	Cat. No. <b>VP907</b>
<b>VPC/F08</b> -8 poles	Cat. No. <b>VP908</b>
<b>VPC/F09</b> -9 poles	Cat. No. <b>VP909</b>
<b>VPC/F10</b> -10 poles	Cat. No. <b>VP910</b>
<b>VPC/F11</b> -11 poles	Cat. No. <b>VP911</b>
<b>VPC/F12</b> -12 poles	Cat. No. <b>VP912</b>
<b>VPC/F13</b> -13 poles	Cat. No. <b>VP913</b>
<b>VPC/F14</b> -14 poles	Cat. No. <b>VP914</b>
<b>VPC/F15</b> -15 poles	Cat. No. <b>VP915</b>
<b>VPC/F16</b> -16 poles	Cat. No. <b>VP916</b>

### APPROVALS



KEMA-KEUR pending

### ACCESSORIES

End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Cross-connection identification strip (100 mm)	green
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	
Test plug socket	
Test plug	
Numbering strip	
Cover for cable lugs	
Flange	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>VPD/PT/GR</b>	VP501GR
<b>VPD/PT</b>	VP501
<b>VPD/PT (Ex)i</b>	VP561
<b>PTC/2/02</b> poles	PTC0202
<b>PTC/2/03</b> poles	PTC0203
<b>PTC/2/05</b> poles	PTC0205
<b>PTC/2/10</b> poles	PTC0210
<b>PTC/2/00</b> (50 poles)	PTC0200
<b>PTC/SP</b>	PTC0990
-	
-	
-	
<b>DFU/7</b>	DU07
<b>DFM/300</b>	DF300
-	
-	
<b>CNU/8/51</b>	NU0851
<b>VPD/VT</b>	VP502
-	
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
<b>BT/3-BT0</b> for PR/3 only	BT003-BT007
-	
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

# MAC Series

with UL94V-0 polyamide insulating body

- to be used with modular CAM connectors
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in beige RAL 1001 colour



Version available with 2.8 x 0.8 mm solder lug  
**MAC.6/VS** Cat. No. MA500



Our F5 type  $\varnothing 5 \times 20$  mm - 250 V fuse (supplied separately) **without** pilot LED



Version without disconnect lever suitable for the permanent use with CAM modular connector

(\* ) Values referred to the characteristics of the insulating body

beige version	MAC.6	MAC.6/FS	MAC.6/N
(Ex)i version	Cat. No. MA100	Cat. No. MA410	Cat. No. MA200
TECHNICAL CHARACTERISTICS			
function / type	disconnect lever	for $\varnothing 5 \times 20$ mm fuse	without disconnect lever for the use with CAM connector
rated cross-section (mm <sup>2</sup> )	6	6	6
connecting capacity			
flexible (mm <sup>2</sup> )	0,2 ÷ 10	0,2 ÷ 10	0,2 ÷ 10
rigid (mm <sup>2</sup> )	0,2 ÷ 10	0,2 ÷ 10	0,2 ÷ 10
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	6 - WP60/20	6 - WP60/20	6 - WP60/20
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V (*) / 16 A / A5	800 V (*) / 6,3 A / A5	800 V (*) / 16 A / A5
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	600 V (*) / 16 A / 20-10 AWG / 13,3 lb.in	600 V / 8 A / 20-10 AWG / 13,3 lb.in	600 V (*) / 16 A / 20-10 AWG / 13,3 lb.in
rated impulse withstand voltage / pollution degree	8 KV / 3	8 KV / 3	8 KV / 3
insulation stripping length (mm)	14	14	14
tightening torque value (test / max) (Nm)	1,2 / 1,9	1,2 / 1,9	1,2 / 1,9
height / width / thickness TH/35 7,5 mm	65 / 83 / 8	72 / 83 / 8	63 / 77 / 8
height / width / thickness TH/35 15 mm	73 / 83 / 8	80 / 83 / 8	71 / 77 / 8
height / width / thickness G32	69 / 83 / 8	76 / 83 / 8	67 / 77 / 8

## APPROVALS




Other approvals referred to MAC.6 standard version

ACCESSORIES	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
End sections	grey	-	-	-	-	-
	beige	-	-	-	-	-
	blue	-	-	-	-	-
Permanent cross connection (pre-assembled)	<b>PIL/2</b> poles	PIL02	<b>PIL/2</b> poles	PIL02	<b>PIL/2</b> poles	PIL02
	<b>PIL/3</b> poles	PIL03	<b>PIL/3</b> poles	PIL03	<b>PIL/3</b> poles	PIL03
	<b>PIL/4</b> poles	PIL04	<b>PIL/4</b> poles	PIL04	<b>PIL/4</b> poles	PIL04
	<b>PIL/8</b> poles	PIL08	<b>PIL/8</b> poles	PIL08	<b>PIL/8</b> poles	PIL08
Switchable cross connection	-	-	-	-	-	-
Multiple common bar	250 mm	-	-	-	-	-
Shunting screw and sleeve	-	-	-	-	-	-
Coloured partition	red, green, white	-	-	-	-	-
Test plug socket	-	-	-	-	-	-
Test plug	<b>SDD/1</b>	DD001	<b>SDD/1</b>	DD001	<b>SDD/1</b>	DD001
Pitching strip	<b>MAC/SPS</b>	MA020	<b>MAC/SPS</b>	MA020	<b>MAC/SPS</b>	MA020
$\varnothing 5 \times 20$ mm fuse	-	-	<b>F5</b>	FN...	-	-
Marking tag	printed or blank	-	<b>CNU/8/51</b>	NU0851	<b>CNU/8/51</b>	NU0851
End bracket	<b>BTU</b> for PR/DIN and PR/3	BT005	<b>BTU</b> for PR/DIN and PR/3	BT005	<b>BTU</b> for PR/DIN and PR/3	BT005
	<b>BT/3-BT0</b> for PR/3 only	BT003-BT007	<b>BT/3-BT0</b> for PR/3 only	BT003-BT007	<b>BT/3-BT0</b> for PR/3 only	BT003-BT007
	<b>BT/DIN/PO</b> for PR/DIN only	BT001	<b>BT/DIN/PO</b> for PR/DIN only	BT001	<b>BT/DIN/PO</b> for PR/DIN only	BT001
Mounting rail according to IEC 60715 Std.	<b>PR/DIN/AC</b> of steel	PR001	<b>PR/DIN/AC</b> of steel	PR001	<b>PR/DIN/AC</b> of steel	PR001
	<b>PR/DIN/AS</b> same with slots	PR004	<b>PR/DIN/AS</b> same with slots	PR004	<b>PR/DIN/AS</b> same with slots	PR004
	<b>PR/DIN/AL</b> of aluminium	PR002	<b>PR/DIN/AL</b> of aluminium	PR002	<b>PR/DIN/AL</b> of aluminium	PR002
	<b>PR/3/AC</b> of steel	PR003	<b>PR/3/AC</b> of steel	PR003	<b>PR/3/AC</b> of steel	PR003
	<b>PR/3/AS</b> same with slots	PR005	<b>PR/3/AS</b> same with slots	PR005	<b>PR/3/AS</b> same with slots	PR005

# CAM shunting elements


with polyamide insulating body

- used with MAC terminal blocks



<b>standard version</b>	
<b>version with lock</b>	
<b>version with lock and pins</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>CAM</b>	Cat. No.	<b>MA110</b>
<b>CAM/B</b>	Cat. No.	<b>MA111</b>
<b>CAM/C</b>	Cat. No.	<b>MA112</b>
2,5		
0,2 ÷ 6		
0,2 ÷ 6		
4 - WP40/16		
800 V / 24 A / A3		
600 V / 16 A / 20-10 AWG / 8,9 lb.in		
8 KV / 3		
12		
-		
-		
-		
-		
-		

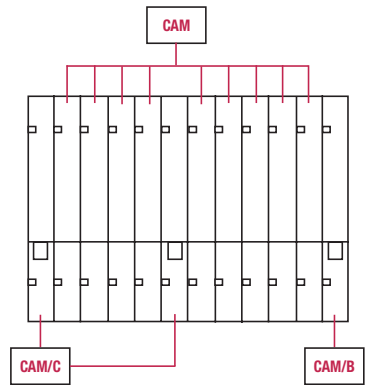




example of the derivation connector composition

## APPROVALS



<b>ACCESSORIES</b>	
Shunting connection	beige
Pole lock	
Safety cover	

<b>Type</b>	<b>Cat. No.</b>
<b>MAC/COS</b>	MA030
<b>MAC/PLZ</b>	MA010
<b>MAC/CP8</b>	MA040

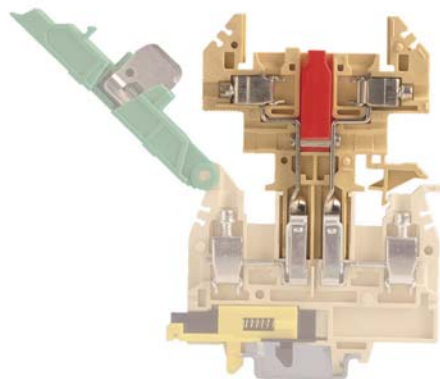

CAM insertion



CAM connector inserted into MAC composed terminal block

**NOTE:**

the use of CAM/C type could be necessary only in the case the connector is composed by more than 8 elements

# Mini terminal blocks

## with UL94V-0 polyamide insulating body

- mounting onto PR/2 type rails - TH/15 type
- available in standard (grey RAL 7042 colour) or (Ex) i "intrinsic safety" circuits (blue RAL 5015 colour) versions
- **RP.4** and **RN.2**: **CESI 03 ATEX 073 U** Ex e certificate I M2 / II 2 G D operating temperature range: -40 ÷ +80 °C
- when rail assemblies are to be manufactured for potentially explosive environments, please refer to the instructions given on page A14



The **/GR** tag indicates the grey colour version.

grey version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	

### APPROVALS

ACCESSORIES	
End sections	grey blue
Permanent cross connection	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Test plug socket	
Test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

RN.1/GR	
Cat. No.	<b>RN300GR</b>
RN.1 (Ex)i	
Cat. No.	<b>RN400</b>
TECHNICAL CHARACTERISTICS	
feed-through	
1,5	
0,2 ÷ 2,5	
0,2 ÷ 2,5	
1,5 - WP15/14	
500 V / 17,5 A / A1	
600 V / 15 A / 26-14 AWG / 4,5 lb.in	
-	
6 KV / 3	
8	
0,4 / 0,8	
32 / 27 / 4,2	



RN.2/GR	
Cat. No.	<b>RN500GR</b>
RN.2 (Ex)i	
Cat. No.	<b>RN510</b>
TECHNICAL CHARACTERISTICS	
feed-through	
2,5	
0,2 ÷ 4	
0,2 ÷ 4	
2,5 - WP25/14	
400 V / 24 A / A3	
300 V / 20 A / 20 ÷ 12 AWG / 3,5 lb.in	
250 V	
6 KV / 3	
8	
0,4 / 0,8	
32 / 27 / 5	



RP.4/GR	
Cat. No.	<b>RP300GR</b>
RP.4 (Ex)i	
Cat. No.	<b>RP400</b>
TECHNICAL CHARACTERISTICS	
feed-through	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
630 V / 32 A / A4	
600 V / 30 A / 20-10 AWG / 4,4 lb.in	
250 V	
6 KV / 3	
9	
0,5 / 1,2	
35 / 31 / 6	



Type	Cat. No.
<b>RFN/PT/GR</b>	RF101GR
<b>RFN/PT (Ex)i</b>	RF201
<b>PM/11/2</b> poles	PM112
<b>PM/11/3</b> poles	PM113
<b>PM/11/5</b> poles	PM115
<b>PM/11/10</b> poles	PM110
-	-
<b>PMP/16</b>	PMP16
<b>CPM/16 (CPX/16)</b>	CPM16 (CPX16)
<b>DFF/2</b>	DFF2..
<b>PSD/K</b>	PDO11
<b>SDD/1</b>	DD001
<b>CNU/8/61</b>	NU0861
<b>TQM/02</b>	TQM02
-	-
<b>PRP/5</b>	PRP05
-	-
<b>BT/2</b>	BT006
-	-
-	-
-	-
<b>PR/2/AC</b> of steel	PR009
<b>PR/2/AS</b> same with slots	PR010

Type	Cat. No.
<b>RFN/PT/GR</b>	RF101GR
<b>RFN/PT (Ex)i</b>	RF201
<b>PM/12/2</b> poles	PM122
<b>PM/12/3</b> poles	PM123
<b>PM/12/5</b> poles	PM125
<b>PM/12/10</b> poles	PM120
-	-
<b>PMP/25</b>	PMP25
<b>CPM/16 (CPX/16)</b>	CPM16 (CPX16)
<b>DFF/2</b>	DFF2..
<b>PSD/A</b>	PDO01
<b>SDD/1</b>	DD001
<b>CNU/8/51</b>	NU0851
-	-
<b>PRP/5</b>	PRP05
<b>CNU/8/51</b>	NU0851
-	-
<b>BT/2</b>	BT006
-	-
-	-
-	-
<b>PR/2/AC</b> of steel	PR009
<b>PR/2/AS</b> same with slots	PR010

Type	Cat. No.
<b>RP4/PT/GR</b>	RP301GR
<b>RP4/PT (Ex)i</b>	RP401
<b>PM/41/2</b> poles	PM412
<b>PM/51/3</b> poles	PM513
<b>PM/51/5</b> poles	PM515
<b>PM/51/10</b> poles	PM510
-	-
<b>PMP/58</b>	PMP58
<b>CPM/01 (CPX/01)</b>	CPM01 (CPX01)
<b>DFF/2</b>	DFF2..
<b>PSD/A</b>	PDO01
<b>SDD/1</b>	DD001
<b>CNU/8/61</b>	NU0861
-	-
<b>PRP/5</b>	PRP05
<b>CNU/8/51</b>	NU0851
<b>CSC</b>	CS...
<b>BT/2</b>	BT006
-	-
-	-
<b>PR/2/AC</b> of steel	PR009
<b>PR/2/AS</b> same with slots	PR010

# Mini terminal blocks

## with UL94V-0 polyamide insulating body

- mounting onto PR/2 type rails – TH/15 type
- **TR.2** and **TR.4:**  
**CESI 03 ATEX 022 U** Ex e certificate  
 I M2 / II 2 G D operating temperature range:  
 -40 ÷ +80 °C
- available in grey RAL 7042 colour




Two 6.3 x 0.8 mm or four 2.8 x 0.8 mm flat push-on tab connections according to Std. IEC 60760 Std.

The **/GR** tag indicates the grey colour version.

grey version	<b>RFI.2/GR</b>	<b>TR.2</b>	<b>TR.4</b>
(Ex)i version	Cat. No. <b>RF110GR</b>	Cat. No. <b>TR110</b>	Cat. No. <b>TR200</b>
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	feed-through for push-on tab connections	earth	earth
rated cross-section (mm <sup>2</sup> )	2,5	2,5	4
connecting capacity			
flexible (mm <sup>2</sup> )	sino a 2,5	0,2 ÷ 4	0,2 ÷ 6
rigid (mm <sup>2</sup> )	-	0,2 ÷ 4	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	-	2,5 - WP25/14	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	400 V / 20 A / -	- / - / A3	- / - / A4
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	600 V / 20 A / 12 AWG max	- / - / 20-12 AWG / 3,5 lb.in	- / - / 20-10 AWG / 5,5 lb.in
rated impulse withstand voltage / pollution degree	- / -	- / -	- / -
insulation stripping length (mm)	6 KV / 3	6 KV / 3	6 KV / 3
tightening torque value (test / max) (Nm)	-	8	9
height / width / thickness	- / -	0,4 / 0,8	0,5 / 1,2
	32 / 28 / 6	32 / 27 / 5	35 / 35 / 7,3
	IEC Ex pending		
<b>APPROVALS</b>	<b>APPROVALS</b>	<b>APPROVALS</b>	<b>APPROVALS</b>
<b>ACCESSORIES</b>	<b>ACCESSORIES</b>	<b>ACCESSORIES</b>	<b>ACCESSORIES</b>
End sections	grey blue	<b>RFN/PT/GR</b>	<b>TR111</b>
Permanent cross connection	<b>POF/17</b>	-	-
Switchable cross connection	-	-	-
Multiple common bar	250 mm	<b>PMP/17</b>	-
Shunting screw and sleeve		<b>CPM/17</b>	-
Coloured partition	red, green, white	<b>DFF/2</b>	<b>DFF/2</b>
Test plug socket		<b>PSD/K</b>	-
Test plug		<b>SDD/1</b>	-
Numbering strip		<b>CNU/8/61</b>	<b>CNU/8/51</b>
Warning plate	on adjacent terminal blocks	-	-
Marking tag	printed or blank	<b>CNU/8/61</b>	<b>CNU/8/51</b>
End bracket		<b>CSC</b>	<b>CSC</b>
		<b>BT/2</b>	<b>BT/2</b>
Mounting rail		-	-
according to IEC 60715 Std.		-	-
		<b>PR/2/AC</b> of steel	<b>PR/2/AC</b> of steel
		<b>PR/2/AS</b> same with slots	<b>PR/2/AS</b> same with slots
		PR009	PR009
		PR010	PR010

# Modular multi-pole terminal blocks

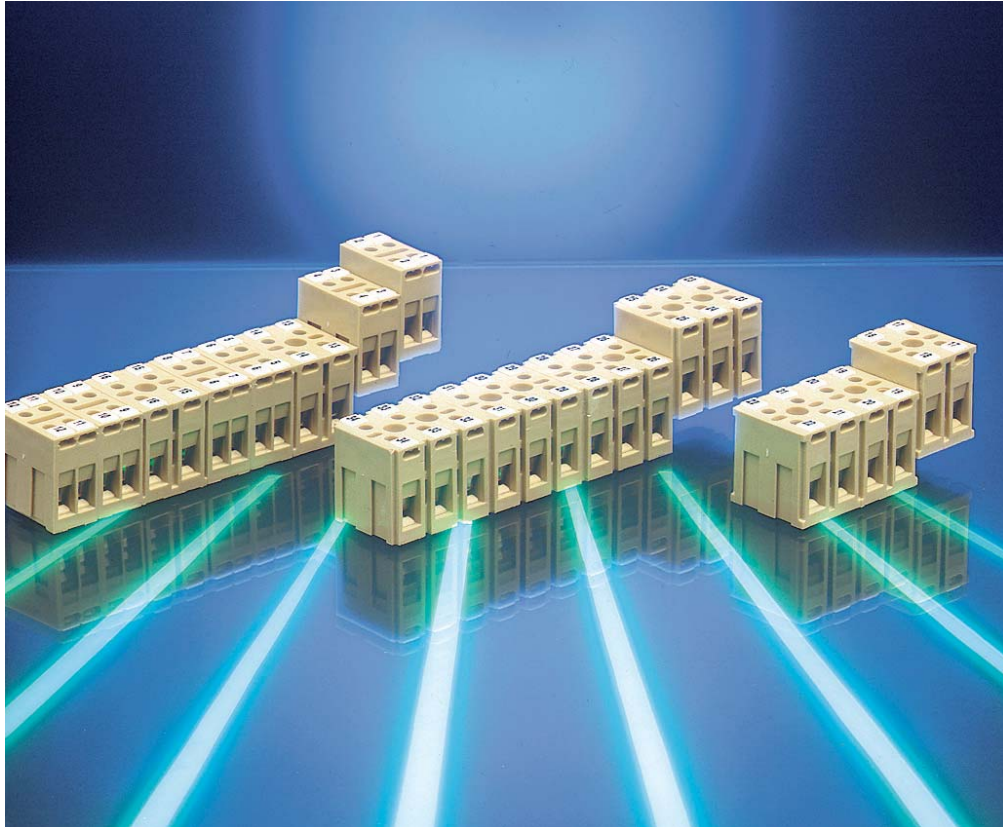

The two way **BPL.4** and three way **TPL.4** terminal blocks can be mounted separately or used to compose terminal boards with unlimited number of poles and no mounting rails are required.

The special “dovetail” coupling system guarantees the maximum compactness of the assembly and only two screws, to be inserted at the ends of the terminal board, are required for the fixing onto the panel.

BPL.4 and TPL.4 terminal blocks are suited for the marking using type CNU/5 tags.



# Modular multi-pole terminal blocks

with UL94V-0 polyamide insulating body



- UL94V-0
- **CESI 03 ATEX 164 U Ex e** certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +80 °C
- panel mount by means of screws

beige version	BPL.4 Cat. No. BP100	TPL.4 Cat. No. TP100	BPL/R Cat. No. BP200
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	two-pole	three-pole	two-pole reduced pitch
rated cross-section (mm <sup>2</sup> )	4	4	4
connecting capacity			
flexible (mm <sup>2</sup> )	0,5 ÷ 6	0,5 ÷ 6	0,5 ÷ 6
rigid (mm <sup>2</sup> )	0,5 ÷ 6	0,5 ÷ 6	0,5 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16	4 - WP40/16	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	500 V / 32 A / A4	500 V / 32 A / A4	500 V / 32 A / A4
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage  /  (V)	300 V / 20 A / 12 ÷ 18 AWG / 4,4 lb.in. 250 V	300 V / 20 A / 12 ÷ 18 AWG / 4,4 lb.in. 250 V	300 V / 20 A / 12 ÷ 18 AWG / 4,4 lb.in. 250 V
rated impulse withstand voltage / pollution degree	6 KV / 3	6 KV / 3	6 KV / 3
insulation stripping length (mm)	12	12	12
tightening torque value (test / max) (Nm)	0,5 / 0,7	0,5 / 0,7	0,5 / 0,7
fixing screw (*) (Ø)	M3 (Ø head 5.6 mm max)	M3 (Ø head 5.6 mm max)	-
height / width / thickness	26 / 24 / 20	26 / 30 / 20	26 / 24 / 13
<b>APPROVALS</b>	(*)	(*)	(*)

Normal compositions		
No of poles	BPL.4 and TPL.4 configurations	Total length mm
2	B	20
3	T	30
4	B+B	40
5	B+T	50
6	T+T	60
7	B+T+B	70
8	T+B+T	80
9	T+T+T	90
10	T+B+B+T	100
12	T+T+T+T	120
14	T+T+B+T+T	140
15	T+T+T+T+T	150
16	T+T+B+B+T+T	160
18	T+T+T+T+T+T	180
20	T+T+T+B+T+T+T	200

**(\*) NOTE:**  
when using BPL.4 and TPL.4 terminal blocks in Ex e classified installations, the use of the insulated fixing screw is required.

# Modular multi-pole terminal blocks

with UL94V-0 polyamide insulating bod



- UL94V-0
- panel mount by means of screws
- /PS versions, with poles including one screw connection and one feed-through lug with push-on connection (2.3 x 0.8 mm), which may also be used for soldering

(\*): with bearing plate thickness = 1 mm

beige version	BPL.4/PS Cat. No. BP300	TPL.4/PS Cat. No. TP200
<b>TECHNICAL CHARACTERISTICS</b>		
function / type	version with special connections	version with special connections
rated cross-section (mm <sup>2</sup> )	4	4
connecting capacity		
flexible (mm <sup>2</sup> )	0,5 ÷ 6	0,5 ÷ 6
rigid (mm <sup>2</sup> )	0,5 ÷ 6	0,5 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	500 V (*) / 32 A / A4	500 V (*) / 32 A / A4
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	300 V / 20 A / 12 ÷ 18 AWG / 4,4 lb.in.	300 V / 20 A / 12 ÷ 18 AWG / 4,4 lb.in.
rated impulse withstand voltage / pollution degree	6 KV / 3	6 KV / 3
insulation stripping length (mm)	12	12
tightening torque value (test / max) (Nm)	0,5 / 0,7	0,5 / 0,7
fixing screw (*) (Ø)	M3 (Ø head 5.6 mm max)	M3 (Ø head 5.6 mm max)
height / width / thickness TH/15	36 / 24 / 20	36 / 24 / 20
<b>APPROVALS</b>		

Normal compositions		
No of poles	BPL.4 and TPL.4 configurations	Total length mm
6	B+R+B	53
8	B+R+R+B	66
10	B+R+R+R+B	79
12	B+R+R+R+R+B	92
14	B+R+R+R+R+R+B	105
16	B+R+R+R+R+R+R+B	118
18	B+R+R+R+R+R+R+R+B	131
20	B+R+R+R+R+R+R+R+R+B	144

PS versions, equipped with solder connections are also available in the following configurations:

**BPL.4/PS (Cat. No. BP300) - TPL.4/PS (Cat. No. TP200)**  
equipped with screw connections on the opposite side from the solder connections

**BPL.4/PS/A (Cat. No. BP310) - TPL.4/PS/A (Cat. No. TP210)**  
equipped with screw connections on the same side as the solder connections

**BPL.4/PS/B (Cat. No. BP320) - TPL.4/PS/B (Cat. No. TP220)**  
equipped with 2 (3) solder lugs and 4 (6) connections.

# CNT Series

## Neutral disconnect terminal blocks

- UL94V-0
- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- available in blue RAL 5015 colour



(Ex)i version	CNT.6 Cat. No. CNT06	CNT.16 Cat. No. CNT16	CNT.35 Cat. No. CNT35
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	neutral disconnect terminal block	neutral disconnect terminal block	neutral disconnect terminal block
rated cross-section (mm <sup>2</sup> )	6	6	6
connecting capacity			
flexible (mm <sup>2</sup> )	0,5 ÷ 6	0,5 ÷ 16	0,5 ÷ 35
rigid (mm <sup>2</sup> )	0,5 ÷ 10	0,5 ÷ 25	0,5 ÷ 50
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	6 - WP60/20	16 - WP160/22	35 - WP350/30
rated voltage / rated current / gauge conf. to IEC 60947-7-1	400 V / 41 A / A5	400 V / 76 A / B7	400 V / 125 A / A9
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	-	-	-
rated impulse withstand voltage / pollution degree	6 KV / 3	6 KV / 3	6 KV / 3
insulation stripping length (mm)	10,5	12	14,5
tightening torque value (test / max) (Nm)	1,2 / 1,9	2 / 3	2,5 / 5
height / width / thickness TH/35 7,5 mm	52 / 51 / 8	56 / 53 / 12	62 / 56 / 16
height / width / thickness TH/35 15 mm	60 / 51 / 8	64 / 53 / 12	70 / 56 / 16
height / width / thickness G32	56 / 51 / 8	61 / 53 / 12	66 / 56 / 16

## APPROVALS

ACCESSORIES	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.	
End sections	blu	CNT6/PT	CNT601	CNT16/PT	CNT161	CNT35/PT	CNT351
Collecting busbar support		CNT/SU	CNTSU	CNT/SU	CNTSU	CNT/SU	CNTSU
10 x 3 mm collecting busbar in tin-plated brass = 1 m long		BNT/OT	BNTOT	BNT/OT	BNTOT	BNT/OT	BNTOT
10 x 3 mm collecting busbar in tin-plated copper = 1 m long		BNT/Cu	BNTCU	BNT/Cu	BNTCU	BNT/Cu	BNTCU
Neutral collecting busbar feeding terminal		BNT/CO	BNTCO	BNT/CO	BNTCO	BNT/CO	BNTCO
Coloured partition	red, green, white	DFU/4	DU04..	DFU/4	DU04..	DFU/4	DU04..
Numbering strip		SNZ/8	SN005	SNZ/8	SN005	SNZ/8	SN005
Marking tag	printed or blank	CNU/8/51	NU0851	CNU/8/51	NU0851	CNU/8/51	NU0851
End bracket		BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005
		BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001
		BT/3 for PR/3 only	BT003	BT/3 for PR/3 only	BT003	BT/3 for PR/3 only	BT003
		BTO	BT007	BTO	BT007	BTO	BT007
		PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001
		PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004
		PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002
		PR/3/AC of steel	PR003	PR/3/AC of steel	PR003	PR/3/AC of steel	PR003
		PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005

# Spring clamp and insulation displacement terminal blocks - Polyamide insulated

## Feed-through terminal blocks

HMM.1 series . . . . .	page 72
HMM.2 series . . . . .	page 73
HMM.2/1+2/S . . . . .	page 74
HMM.2/2+2/A . . . . .	page 74
HMM.2/2+2/S . . . . .	page 74
HMM.4 . . . . .	page 75
HMM.6 - HMM.10 - HMM.16 . . . . .	page 76
HMR.16 voltage distribution terminal block . . . . .	page 77

## Earth terminal blocks

HTE.1 series . . . . .	page 78
HTE.2 series . . . . .	page 79
HTE.4 series . . . . .	page 80
HTE.6 - HTE.10 - HTE.16 . . . . .	page 81

## Two and three level terminal blocks

HMD.1 - HMD.1/CI . . . . .	page 82
HMD.2N - HMD.2N/CI . . . . .	page 82
HMD.2 . . . . .	page 82
HMD.1/X (with electronic components) . . . . .	page 83
HMD.2N/X (with electronic components) . . . . .	page 83
HMD.2N/DD - HMD.2N/3DC (with diodes) . . . . .	page 83
HMD.2N/X1 . . . . .	page 84
HLD.2 . . . . .	page 85
HDE.2 . . . . .	page 85
HTTE.2 . . . . .	page 85

## Disconnect terminal blocks

HMS.2 . . . . .	page 86
HSCB.4 (slide link for measuring circuits) . . . . .	page 86
HSCB.6 (slide link for measuring circuits) . . . . .	page 86

## Fuse-holder terminal blocks

HMFA.2 (for blade type fuses) . . . . .	page 87
HMF.4 - CPF/5 . . . . .	page 88
HMF.4/L... (with LED) . . . . .	page 88
HFR.4/M - HFR.4 . . . . .	page 89

## Terminal blocks for connectors

HCD.1 . . . . .	page 90
HVPC.2 - CHP.2 - CHP.2D . . . . .	page 91
HVTE.2 - CHTE.2 - CHTE.2D . . . . .	page 92

## Mini terminal blocks


HPP.2 . . . . .	page 93
HP.2 . . . . .	page 94
HPC.2 . . . . .	page 94

## Insulation displacement terminal blocks

NCS - NCV . . . . .	pages 95-96
---------------------	-------------

# Spring clamp terminal blocks

- available in grey RAL 7042 colour only

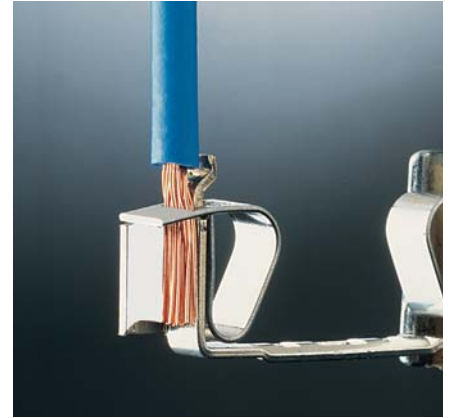

For high harness volumes, CABUR offers its own range of spring-clamp terminal blocks suitable for cables from 0.2 to 10 mm<sup>2</sup> and reduced current intensity values.


In order to protect the clamping system, a special stop is provided in the insulating body; this has the function of ensuring the spring does not go over its elastic range, in case of handling carried out by unskilled workforce.

The appropriate sizing of the wire insertion hole, fully in compliance with the requirements given by IEC 60947-1 Standard concerning the gauge, guarantees the insertion of any type of conductor having the rated cross-section, also with a ferrule. The resulting connection, with respect to the technology adopted, is of the maximum reliability and safety under both the aspects of the quality of the materials and for the particular conformation of the components; in this way the damaging of unprepared flexible conductors is avoided.


The insertion of the wire is vertical; this means further time and costs savings, especially where space is limited, but where guaranteed high-density connections are required.

For the commoning of different elements, a practical and safe cross-connection system is available.

The terminals with rated cross sections between 1.5 mm and 4 mm<sup>2</sup> can be connected one with another in the most various ways thanks to our exclusive “Easy Bridge” (PTC) connection system, with quick coupling, which combines efficiency, rapidity and flexibility and ensures at the same time an extraordinary economic result; these characteristics, **together with an IPXXB intrinsic installation, without the need of further insulation protections** (for cables, terminals and cross-connections), guarantee a connectivity which is superior to that offered by competitors.



CNU/8



SHZ

## Marking systems

Our particular marking system has to be highlighted. The same **SHZ** numbering strip, in fact, can be inserted on both sides of the terminal block or on the appropriate housings provided in the upper part of the terminal block. This means easy identification of every terminal block in the electrical panel.

It is possible also to perform the marking also using **CNU/8** tags.



# HMM Series

## with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715

Std., "TH/35" type

- available in standard (grey RAL 7042 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions



PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING
Insulation voltage in the above configurations (V)					
630	630		320	630	630

The /GR tag indicates the grey colour version.

grey version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

HMM.1/GR	HMM.1/1+2/GR
Cat. No. HM400GR	Cat. No. HM410GR
HMM.1 (Ex)i	HMM.1/1+2 (Ex)i
Cat. No. HI400	Cat. No. HI410
feed-through	feed-through, 1 input and 2 outputs
1,5	1,5
0,2 ÷ 2,5	0,2 ÷ 2,5
0,2 ÷ 2,5	0,2 ÷ 2,5
1,5 - WP15/14	1,5 - WP15/14
500 V / 17,5 A / B2	500 V / 17,5 A / B2
600 V / 15 A / 26-14 AWG	600 V / 15 A / 26-14 AWG
8 KV / 3	8 KV / 3
10	10
43 / 45 / 4,2	43 / 56 / 4,2
51 / 45 / 4,2	51 / 56 / 4,2
-	-

HMM.1/2+2/GR	HMM.1/2+2 (Ex)i
Cat. No. HM420GR	Cat. No. HI420
feed-through, 2 inputs and 2 outputs	feed-through, 2 inputs and 2 outputs
1,5	1,5
0,2 ÷ 2,5	0,2 ÷ 2,5
0,2 ÷ 2,5	0,2 ÷ 2,5
1,5 - WP15/14	1,5 - WP15/14
500 V / 17,5 A / B2	500 V / 17,5 A / B2
600 V / 15 A / 26-14 AWG	600 V / 15 A / 26-14 AWG
8 KV / 3	8 KV / 3
10	10
43 / 65 / 4,2	43 / 65 / 4,2
51 / 65 / 4,2	51 / 65 / 4,2
-	-

### APPROVALS



ACCESSORIES	
End sections	grey blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Screwdriver for the activation of the spring	
Warning plate	on adjacent terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
HMT.1/PT/GR	HM401GR
HMT.1/PT (Ex)i	HI401
PTC/1/02 poles	PTC0102
PTC/1/03 poles	PTC0103
PTC/1/05 poles	PTC0105
PTC/1/10 poles	PTC0110
PTC/1/00 (50 poles)	PTC0100
17,5	
PTC/SP	PTC0990
-	
DFH/1	DH01..
DFM/500	DF500
-	
SDH/4-SDH/4P	DH004-DH04P
SH4/PT	DH401
SHZ/1	SH004
CCH/2,5-4	CCH02
-	
SHZ/1	SH004
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
HMT.1/1+2/PT/GR	HM411GR
HMT.1/1+2/PT (Ex)i	HI411
PTC/1/02 poles	PTC0102
PTC/1/03 poles	PTC0103
PTC/1/05 poles	PTC0105
PTC/1/10 poles	PTC0110
PTC/1/00 (50 poles)	PTC0100
17,5	
PTC/SP	PTC0990
-	
DFH/2	DH02..
DFM/500	DF500
-	
SDH/4-SDH/4P	DH004-DH04P
SH4/PT	DH401
SHZ/1	SH004
CCH/2,5-4	CCH02
-	
SHZ/1	SH004
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
HMT.1/2+2/PT/GR	HM421GR
HMT.1/2+2/PT (Ex)i	HI421
PTC/1/02 poles	PTC0102
PTC/1/03 poles	PTC0103
PTC/1/05 poles	PTC0105
PTC/1/10 poles	PTC0110
PTC/1/00 (50 poles)	PTC0100
17,5	
PTC/SP	PTC0990
-	
DFH/3	DH03..
DFM/500	DF500
-	
SDH/4-SDH/4P	DH004-DH04P
SH4/PT	DH401
SHZ/1	SH004
CCH/2,5-4	CCH02
-	
SHZ/1	SH004
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

# HMM Series

## with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- available in standard (grey RAL 7042 and beige RAL 1001 colours) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions



PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING
Insulation voltage in the above configurations (V)					
630	630		320	630	630

The /GR tag indicates the grey colour version.


grey version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	feed-through
rated cross-section (mm <sup>2</sup> )	2,5
connecting capacity	
flexible (mm <sup>2</sup> )	0,2 ÷ 4
rigid (mm <sup>2</sup> )	0,2 ÷ 4
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 24 A / A3
UL	600 V / 20 A / 24-12 AWG
rated impulse withstand voltage / pollution degree	8 kV / 3
insulation stripping length (mm)	13
height / width / thickness	41 / 50 / 5,2
height / width / thickness	49 / 50 / 5,2
height / width / thickness	-

HMM.2/GR	HMM.2/1+2/GR	HMM.2/2+2/GR
Cat. No. HM500GR	Cat. No. HM510GR	Cat. No. HM520GR
HMM.2 (Ex)i	HMM.2/1+2 (Ex)i	HMM.2/2+2 (Ex)i
Cat. No. HI500	Cat. No. HI510	Cat. No. HI520
function / type	feed-through, 1 input and 2 outputs	feed-through, 2 inputs and 2 outputs
rated cross-section (mm <sup>2</sup> )	2,5	2,5
connecting capacity		
flexible (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4
rigid (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14	2,5 - WP25/14
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 24 A / A3	800 V / 24 A / A3
UL	600 V / 20 A / 24-12 AWG	600 V / 20 A / 24-12 AWG
rated impulse withstand voltage / pollution degree	8 kV / 3	8 kV / 3
insulation stripping length (mm)	13	13
height / width / thickness	41 / 66 / 5,2	41 / 82 / 5,2
height / width / thickness	49 / 66 / 5,2	49 / 82 / 5,2
height / width / thickness	-	-

HMM.2/GR	HMM.2/1+2/GR	HMM.2/2+2/GR
Cat. No. HM500GR	Cat. No. HM510GR	Cat. No. HM520GR
HMM.2 (Ex)i	HMM.2/1+2 (Ex)i	HMM.2/2+2 (Ex)i
Cat. No. HI500	Cat. No. HI510	Cat. No. HI520
function / type	feed-through, 1 input and 2 outputs	feed-through, 2 inputs and 2 outputs
rated cross-section (mm <sup>2</sup> )	2,5	2,5
connecting capacity		
flexible (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4
rigid (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14	2,5 - WP25/14
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 24 A / A3	800 V / 24 A / A3
UL	600 V / 20 A / 24-12 AWG	600 V / 20 A / 24-12 AWG
rated impulse withstand voltage / pollution degree	8 kV / 3	8 kV / 3
insulation stripping length (mm)	13	13
height / width / thickness	41 / 66 / 5,2	41 / 82 / 5,2
height / width / thickness	49 / 66 / 5,2	49 / 82 / 5,2
height / width / thickness	-	-

HMM.2/GR	HMM.2/1+2/GR	HMM.2/2+2/GR
Cat. No. HM500GR	Cat. No. HM510GR	Cat. No. HM520GR
HMM.2 (Ex)i	HMM.2/1+2 (Ex)i	HMM.2/2+2 (Ex)i
Cat. No. HI500	Cat. No. HI510	Cat. No. HI520
function / type	feed-through, 1 input and 2 outputs	feed-through, 2 inputs and 2 outputs
rated cross-section (mm <sup>2</sup> )	2,5	2,5
connecting capacity		
flexible (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4
rigid (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14	2,5 - WP25/14
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 24 A / A3	800 V / 24 A / A3
UL	600 V / 20 A / 24-12 AWG	600 V / 20 A / 24-12 AWG
rated impulse withstand voltage / pollution degree	8 kV / 3	8 kV / 3
insulation stripping length (mm)	13	13
height / width / thickness	41 / 66 / 5,2	41 / 82 / 5,2
height / width / thickness	49 / 66 / 5,2	49 / 82 / 5,2
height / width / thickness	-	-

### APPROVALS



ACCESSORIES	
End sections	grey blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper (A)	
Cross-connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Screwdriver for the activation of the spring	
Warning plate	on adjacent terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
HMT.2/PT/GR	HM501GR
HMT.2/PT (Ex)i	HI501
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
PTC/SP	PTC0990
-	
DFH/1	DH01..
-	
SDD/1	DD001
SDH/5	DH005
SH5/PT	DH501
CNU/8/51	NU0851
CCH/2,5-4	CCH02
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
HMT.2/1+2/PT/GR	HM511GR
HMT.2/1+2/PT (Ex)i	HI511
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
PTC/SP	PTC0990
-	
DFH/2	DH02..
-	
SDD/1	DD001
SDH/5	DH005
SH5/PT	DH501
CNU/8/51	NU0851
CCH/2,5-4	CCH02
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
HMT.2/2+2/PT/GR	HM521GR
HMT.2/2+2/PT (Ex)i	HI521
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
PTC/SP	PTC0990
-	
DFH/3	DH03..
-	
SDD/1	DD001
SDH/5	DH005
SH5/PT	DH501
CNU/8/51	NU0851
CCH/2,5-4	CCH02
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

# HMM Series

## with polyamide insulating body

- UL94V-0
- disconnect by lever
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- available in standard (grey RAL 7042 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions, where indicated



The **/GR** tag indicates the grey colour version.

grey version	HMM.2/1+2/S/GR Cat. No. HMS20GR	HMM.2/2+2/A/GR Cat. No. HM170GR	HMM.2/2+2/S/GR Cat. No. HMS10GR
(Ex)i version			
TECHNICAL CHARACTERISTICS			
function / type	disconnect, 1 input and 2 outputs	disconnect (open), 2 inputs and 2 outputs	disconnect, 2 inputs and 2 outputs
rated cross-section (mm <sup>2</sup> )	2,5	2,5	2,5
connecting capacity			
flexible (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4	0,2 ÷ 4
rigid (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4	0,2 ÷ 4
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14	2,5 - WP25/14	2,5 - WP25/14
rated voltage / rated current / gauge conf. to IEC 60947-7-1	400 V / 16 A / A3	400 V / 16 A / A3	400 V / 16 A / A3
rated voltage / rated current / AWG UL	600 V / 20 A / 24-12 AWG	600 V / 20 A / 24-12 AWG	600 V / 20 A / 24-12 AWG
rated impulse withstand voltage / pollution degree	6 kV / 3	6 kV / 3	6 kV / 3
insulation stripping length (mm)	13	13	13
height / width / thickness	48 / 66 / 5,2	37 / 82 / 5,2	48 / 82 / 5,2
height / width / thickness	56 / 66 / 5,2	45 / 82 / 5,2	56 / 82 / 5,2
height / width / thickness	-	-	-

### APPROVALS



ACCESSORIES	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.	
End sections	grey	HMT.2/1+2/PT/GR	HM511GR	HMT.2/2+2/PT/GR	HM521GR	HMT.2/2+2/PT/GR	HM521GR
	beige	-	-	-	-	-	-
	blue	-	-	-	-	-	-
Permanent cross connection	-	-	-	-	-	-	-
Rated current carrying capacity of jumper (A)	-	-	-	-	-	-	-
Multiple common bar	250 mm	-	-	-	-	-	-
Shunting screw and sleeve	-	-	-	-	-	-	-
Coloured partition	red, green, white	DFH/2	DH02..	DFH/3	DH03..	DFH/3	DH03..
Cross connection barrier	red	-	-	-	-	-	-
Test plug socket	-	-	-	-	-	-	-
Test plug	-	SDD/1	DD001	SDD/1	DD001	SDD/1	DD001
Modular test plug	-	SDH/5	DH005	SDH/5	DH005	SDH/5	DH005
End section for modular test plug	-	SH5/PT	DH501	SH5/PT	DH501	SH5/PT	DH501
Numbering strip	-	CNU/8/51	NU0851	CNU/8/51	NU0851	CNU/8/51	NU0851
Screwdriver for the activation of the spring	-	CCH/2,5-4	CCH02	CCH/2,5-4	CCH02	CCH/2,5-4	CCH02
Warning plate on adjacent terminal blocks	-	-	-	-	-	-	-
Marking tag	printed or blank	CNU/8/51	NU0851	CNU/8/51	NU0851	CNU/8/51	NU0851
End bracket	-	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005
	-	BTO	BT007	BTO	BT007	BTO	BT007
	-	BT/3 for PR/3 only	BT003	BT/3 for PR/3 only	BT003	BT/3 for PR/3 only	BT003
Mounting rail according to IEC 60715 Std.	-	-	-	-	-	-	-
	-	PR/3/AC of steel	PR003	PR/3/AC of steel	PR003	PR/3/AC of steel	PR003
	-	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005



# HMM Series

## with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- available in standard (grey RAL 7042 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) version



PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING

Terminal block	Jumper	Insulation voltage in the above configurations (V)				
HMM.4	PTC/5	500	500	500	500	500

The /GR tag indicates the grey colour version.

grey version
(Ex)i version
TECHNICAL CHARACTERISTICS
function / type
rated cross-section (mm <sup>2</sup> )
connecting capacity
flexible (mm <sup>2</sup> )
rigid (mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type
rated voltage / rated current / gauge conf. to IEC 60947-7-1
rated voltage / rated current / AWG UL
rated impulse withstand voltage / pollution degree
insulation stripping length (mm)
height / width / thickness
height / width / thickness
height / width / thickness

HMM.4/GR	HMM.4/1+2/GR	HMM.4/2+2/GR
Cat. No. HM250GR	Cat. No. HM210GR	Cat. No. HM220GR
HMM.4 (Ex)i	HMM.4/1+2 (Ex)i	HMM.4/2+2 (Ex)i
Cat. No. HI250	Cat. No. HI210	Cat. No. HI220
feed-through	feed-through 1 input and 2 outputs	feed-through 2 inputs and 2 outputs
4	4	4
0,2 ÷ 6	0,2 ÷ 6	0,2 ÷ 6
0,2 ÷ 6	0,2 ÷ 6	0,2 ÷ 6
4 - WP40/16	4 - WP40/16	4 - WP40/16
800 V / 32 A / A4	800 V / 32 A / A4	800 V / 32 A / A4
600 V / 30 A / 24-10 AWG	-	-
8 KV / 3	8 KV / 3	8 KV / 3
17	17	17
45 / 58 / 6,2	45 / 78 / 6,2	45 / 98 / 6,2
52 / 58 / 6,2	52 / 78 / 6,2	52 / 98 / 6,2
-	-	-

HMM.4/1+2/GR	HMM.4/2+2/GR
Cat. No. HM210GR	Cat. No. HM220GR
HMM.4/1+2 (Ex)i	HMM.4/2+2 (Ex)i
Cat. No. HI210	Cat. No. HI220
feed-through 1 input and 2 outputs	feed-through 2 inputs and 2 outputs
4	4
0,2 ÷ 6	0,2 ÷ 6
0,2 ÷ 6	0,2 ÷ 6
4 - WP40/16	4 - WP40/16
800 V / 32 A / A4	800 V / 32 A / A4
-	-
8 KV / 3	8 KV / 3
17	17
45 / 78 / 6,2	45 / 98 / 6,2
52 / 78 / 6,2	52 / 98 / 6,2
-	-

HMM.4/2+2/GR	HMM.4/2+2 (Ex)i
Cat. No. HM220GR	Cat. No. HI220
feed-through 2 inputs and 2 outputs	feed-through 2 inputs and 2 outputs
4	4
0,2 ÷ 6	0,2 ÷ 6
0,2 ÷ 6	0,2 ÷ 6
4 - WP40/16	4 - WP40/16
800 V / 32 A / A4	800 V / 32 A / A4
-	-
8 KV / 3	8 KV / 3
17	17
45 / 98 / 6,2	45 / 98 / 6,2
52 / 98 / 6,2	52 / 98 / 6,2
-	-

### APPROVALS



### ACCESSORIES

End sections	grey blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper (A)	
Cross-connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Screwdriver for the activation of the spring	
Warning plate	on adjacent terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
HMT.4/PT/GR	HM251GR
HMT.4/PT (Ex)i	HI251
PTC/5/02 poles	PTC0502
PTC/5/03 poles	PTC0503
PTC/5/05 poles	PTC0505
PTC/5/10 poles	PTC0510
PTC/5/00 (40 poles)	PTC0500
32	
PTC/SP	PTC0990
-	
DFH/1	DH01..
-	
SDD/1	DD001
SDH/6	DH006
SH6/PT	DH601
CNU/8/61	NU0861
CCH/2,5-4	CCH02
-	
CNU/8/61	NU0861
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
HMT.4/1+2/PT/GR	HM211GR
HMT.4/1+2/PT (Ex)i	HI211
PTC/5/02 poles	PTC0502
PTC/5/03 poles	PTC0503
PTC/5/05 poles	PTC0505
PTC/5/10 poles	PTC0510
PTC/5/00 (40 poles)	PTC0500
32	
PTC/SP	PTC0990
-	
DFH/4	DH04..
-	
SDD/1	DD001
SDH/6	DH006
SH6/PT	DH601
CNU/8/61	NU0861
CCH/2,5-4	CCH02
-	
CNU/8/61	NU0861
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
HMT.4/2+2/PT/GR	HM221GR
HMT.4/2+2/PT (Ex)i	HI221
PTC/5/02 poles	PTC0502
PTC/5/03 poles	PTC0503
PTC/5/05 poles	PTC0505
PTC/5/10 poles	PTC0510
PTC/5/00 (40 poles)	PTC0500
32	
PTC/SP	PTC0990
-	
DFH/4	DH04..
-	
SDD/1	DD001
SDH/6	DH006
SH6/PT	DH601
CNU/8/61	NU0861
CCH/2,5-4	CCH02
-	
CNU/8/61	NU0861
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

# HMM Series

with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- available in standard (grey RAL 7042 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) version



PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING

The /GR tag indicates the grey colour version.

Morsetto	Ponte	Insulation voltage in the above configurations (V) acc. to IEC 60947-7-1					
HMM.6	PTC/8	500	500		500	500	500
HMM.10 (HMM.16)	PTC/11 (/16)	1000	1000		800	1000	800

grey version	HMM.6/GR	HMM.10/GR	HMM.16/GR
	Cat. No. <b>HM320GR</b>	Cat. No. <b>HM330GR</b>	Cat. No. <b>HM340GR</b>
(Ex)i version	HMM.6 (Ex)i	HMM.10 (Ex)i	HMM.16 (Ex)i
	Cat. No. <b>HI320</b>	Cat. No. <b>HI330</b>	Cat. No. <b>HI340</b>
TECHNICAL CHARACTERISTICS			
function / type	feed-through	feed-through	feed-through
rated cross-section (mm <sup>2</sup> )	6	10	16
connecting capacity			
flexible (mm <sup>2</sup> )	0,2 ÷ 10	1,5 ÷ 16	1,5 ÷ 25
rigid (mm <sup>2</sup> )	0,2 ÷ 10	1,5 ÷ 16	1,5 ÷ 25
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	6 - WP60/20	10 - WP100/21	16 - WP160/22
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 41 A / A5	1000 V / 57 A / A6	1000 V / 76 A / A7
rated impulse withstand voltage / pollution degree	600 V / 41 A / 24-8 AWG	-	-
UL	8 KV / 3	12 KV / 3	12 KV / 3
insulation stripping length (mm)	18	18	18
height / width / thickness	44 / 62 / 8,2	53 / 71 / 10	56 / 80 / 12
height / width / thickness	52 / 62 / 8,2	61 / 70 / 10	64 / 80 / 12
height / width / thickness	-	-	-

## APPROVALS



KEMA  
UL, cUL, ENEL Distribuzione pending

KEMA  
UL, cUL, ENEL Distribuzione pending

ACCESSORIES	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
End sections	HMT.6/PT/GR	HM321GR	HMT.10/PT/GR	HM331GR	HMT.16/PT/GR	HM341GR
Permanent cross connection (intrinsically IPXXB protected once mounted)	HMT.6/PT (Ex)i	HI321	HMT.10/PT (Ex)i	HI331	HMT.16/PT (Ex)i	HI341
	PTC/8/02 poles	PTC0802	PTC/11/02 poles	PTC1102	PTC/16/02 poles	PTC1602
	PTC/8/03 poles	PTC0803	PTC/11/03 poles	PTC1103	PTC/16/03 poles	PTC1603
	PTC/8/05 poles	PTC0805	PTC/11/05 poles	PTC1105	PTC/16/05 poles	PTC1605
	PTC/8/10 poles	PTC0810	PTC/11/10 poles	PTC1110	PTC/16/10 poles	PTC1610
	PTC/8/00 (30 poles)	PTC0800	PTC/11/00 (25 poles)	PTC1100	PTC/16/00 (20 poles)	PTC1600
	Rated current carrying capacity of jumper (A)	<b>41</b>		<b>57</b>		<b>76</b>
Cross-connection identification strip (100 mm)	PTC/SP	PTC0990	-	-	-	
Multiple common bar	-	-	-	-	-	
Shunting screw and sleeve	-	-	-	-	-	
Coloured partition	DFH/1	DH01..	DFH/4	DH04..	DFH/4	DH04..
Cross connection barrier	-	-	-	-	-	-
Test plug socket	-	-	-	-	-	-
Test plug	SDD/1	DD001	SDD/1	DD001	SDD/1	DD001
Modular test plug	-	-	-	-	-	-
End section for modular test plug	-	-	-	-	-	-
Numbering strip	CNU/8/51	NU0851	SNZ/10	SN..	-	-
Screwdriver for the activation of the spring	CCH/2,5-4	CCH02	CCH/4	CCH02	CCH/4	CCH02
Warning plate	-	-	-	-	-	-
Marking tag	CNU/8/51	NU0851	CNU/8/51	NU0851	CNU/8/51	NU0851
End bracket	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005
	BTO	BT007	BTO	BT007	BTO	BT007
	BT/3 for PR/3 only	BT003	BT/3 for PR/3 only	BT003	BT/3 for PR/3 only	BT003
	-	-	-	-	-	-
Mounting rail according to IEC 60715 Std.	PR/3/AC of steel	PR003	PR/3/AC of steel	PR003	PR/3/AC of steel	PR003
	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005	PR/3/AS same with slots	PR005


# HMM Series

with polyamide insulating body

- UL94V-0
- 16 mm<sup>2</sup>
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- available in grey RAL 7042 colour
- can be connected with HMM.2/GR, HMM.2/1+2/GR, HMM.2/2+2/GR, HMS.2/GR, HMFA.2/GR, HMM.4/GR, HMM.4/1+2/GR, HMM.4/2+2/GR, HMM.6/GR

(\*) value referred to the terminal and not to the potential distributor




The /GR tag indicates the grey colour version.



Terminal assembly with double feeding distribution



## Connection scheme - distribution terminal blocs HMR.16/GR and HMR.16/D/GR

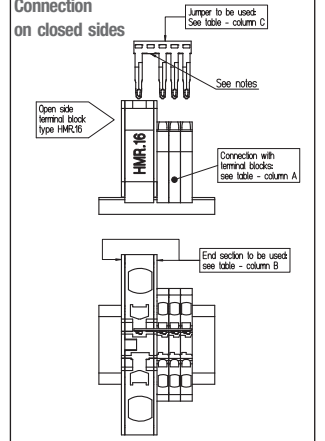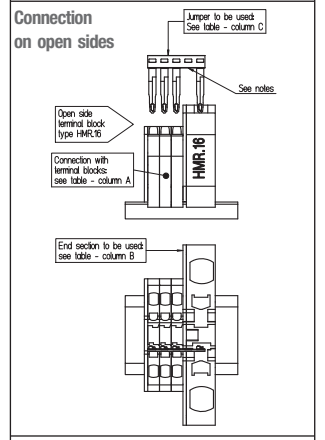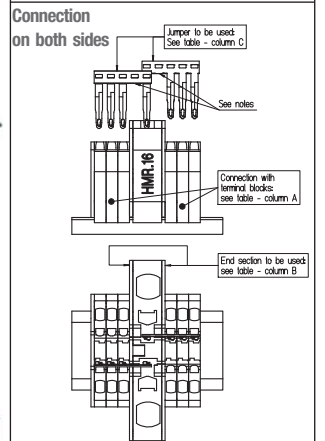

single power supply version	
double supply version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-1
rated voltage / rated current / AWG	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

HMR.16/GR		Cat. No. HM350GR	
HMR.16/D/GR		Cat. No. HM360GR	
potential distributor			
16			
1,5 ÷ 25			
1,5 ÷ 25			
16 - WP160/22			
800 V / 76 A (*) / A7			
-			
12 KV / 3			
18			
50 / 80 / 12,8			
57 / 80 / 12,8			
-			

## cross-connection currents according to UL approval

Colonna A	Colonna B	Colonna C	
Morsello da coll. di rtp.	Piastrina terminale da utilizzare	Pannello di parallelo utilizzabili	
Sigla	Sigla	Codice	Portata
HMM.2		PTC/03/03 poli	PTC0303
HMM.2/1+2		PTC/03/05 poli	PTC0305
HMM.2/2+2	HMR.16-2/PT/GR	PTC/03/10 poli	PTC0310
HMS.2	HM352GR	PTC/03/00 (47 poli)	PTC0300
HMFA.2			

Colonna A	Colonna B	Colonna C	
Morsello da coll. di rtp.	Piastrina terminale da utilizzare	Pannello di parallelo utilizzabili	
Sigla	Sigla	Codice	Portata
HMM.4		PTC/05/03 poli	PTC0503
HMM.4/1+2		PTC/05/05 poli	PTC0505
HMM.4/2+2	HMR.16-4/PT/GR	PTC/05/10 poli	PTC0510
	HM354GR	PTC/05/00 (40 poli)	PTC0500

Colonna A	Colonna B	Colonna C	
Morsello da coll. di rtp.	Piastrina terminale da utilizzare	Pannello di parallelo utilizzabili	
Sigla	Sigla	Codice	Portata
HMM.6		PTC/08/03 poli	PTC0803
		PTC/08/05 poli	PTC0805
		PTC/08/10 poli	PTC0810
	HMR.16-6/PT/GR	PTC/08/00 (30 poli)	PTC0800

ANNOTAZIONI:  
 Il N° di poli da utilizzare sarà uguale al numero di morselli da collegare compreso il ripartitore + 1  
 Per permettere il collegamento di morsello ripartitore eliminare sempre il secondo pin dalla striscia del pannello PTC.



## APPROVALS



UL, cUL, ENEL Distribuzione pending

## ACCESSORIES

End sections	grey
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Screwdriver for the activation of the spring	
Warning plate	on adjacent terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
see table	
see table	
see table	
-	
-	
DFH/4	DH04..
-	
SDD/1	DD001
-	
CCH/4	CCH02
-	
CNU/8/51	NU0851
-	
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Terminal block connected to supply terminal	End sections		Permanent cross connection (**)		
	Type	Cat. No.	Type	Cat. No.	Total capacity
HMM.2/GR	HMR.16-2/PT/GR	HM352GR	PTC/03/03 poles	PTC0303	24 A
HMM.2/1+2/GR			PTC/03/05 poles	PTC0305	
HMM.2/2+2/GR			PTC/03/10 poles	PTC0310	
HMS.2/GR			PTC/03/00 (47 poles)	PTC0300	
HMFA.2/GR					
HMM.4/GR	HMR.16-4/PT/GR	HM354GR	PTC/05/03 poles	PTC0503	32 A
HMM.4/1+2/GR			PTC/05/05 poles	PTC0505	
HMM.4/2+2/GR			PTC/05/10 poles	PTC0510	
			PTC/05/00 (40 poles)	PTC0500	
HMM.6/GR	HMR.16-6/PT/GR	HM356GR	PTC/08/03 poles	PTC0803	41 A
			PTC/08/05 poles	PTC0805	
			PTC/08/10 poles	PTC0810	
			PTC/08/00 (30 poles)	PTC0800	

(\*\*) In order to enable the connection to the supply terminal the second pin must be always removed from the strip of the PTC jumper.

The number of poles of the PTC jumper must be equal to the number of terminal blocks to be cross-connected plus 1

# HTE Series

## with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- for earth connection with yellow/green insulating body



yellow/green version	HTE.1 Cat. No. HT400	HTE.1/1+2 Cat. No. HT410	HTE.1/2+2 Cat. No. HT420																																																																																																																																																																		
<b>TECHNICAL CHARACTERISTICS</b>																																																																																																																																																																					
function / type	earth	earth, 1 input and 2 outputs	earth, 2 inputs and 2 outputs																																																																																																																																																																		
rated cross-section (mm <sup>2</sup> )	1,5	1,5	1,5																																																																																																																																																																		
connecting capacity																																																																																																																																																																					
flexible (mm <sup>2</sup> )	0,2 ÷ 2,5	0,2 ÷ 2,5	0,2 ÷ 2,5																																																																																																																																																																		
rigid (mm <sup>2</sup> )	0,2 ÷ 2,5	0,2 ÷ 2,5	0,2 ÷ 2,5																																																																																																																																																																		
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	1,5 - WP15/14	1,5 - WP15/14	1,5 - WP15/14																																																																																																																																																																		
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / - / B2	- / - / B2	- / - / B2																																																																																																																																																																		
rated voltage / rated current / AWG	- / - / 26-14 AWG	- / - / 26-14 AWG	- / - / 26-14 AWG																																																																																																																																																																		
rated impulse withstand voltage / pollution degree	8 KV / 3	8 KV / 3	8 KV / 3																																																																																																																																																																		
insulation stripping length (mm)	10	10	10																																																																																																																																																																		
height / width / thickness	43 / 50 / 4,2	43 / 61 / 4,2	43 / 65 / 4,2																																																																																																																																																																		
height / width / thickness	51 / 50 / 4,2	51 / 61 / 4,2	51 / 65 / 4,2																																																																																																																																																																		
height / width / thickness	-	-	-																																																																																																																																																																		
<b>APPROVALS</b>																																																																																																																																																																					
<b>ACCESSORIES</b>																																																																																																																																																																					
End sections	grey blue																																																																																																																																																																				
Permanent cross connection																																																																																																																																																																					
Rated current carrying capacity of jumper (A)																																																																																																																																																																					
Cross-connection identification strip (100 mm)	green																																																																																																																																																																				
Multiple common bar	250 mm																																																																																																																																																																				
Shunting screw and sleeve																																																																																																																																																																					
Coloured partition	red, green, white																																																																																																																																																																				
Cross connection barrier	red																																																																																																																																																																				
Test plug socket																																																																																																																																																																					
Test plug																																																																																																																																																																					
Modular test plug																																																																																																																																																																					
End section for modular test plug																																																																																																																																																																					
Numbering strip																																																																																																																																																																					
Screwdriver for the activation of the spring																																																																																																																																																																					
Warning plate	on adjacent terminal blocks																																																																																																																																																																				
Marking tag	printed or blank																																																																																																																																																																				
End bracket																																																																																																																																																																					
Mounting rail according to IEC 60715 Std.																																																																																																																																																																					
	<table border="1"> <thead> <tr> <th>Type</th> <th>Cat. No.</th> </tr> </thead> <tbody> <tr><td>HMT.1/PT/GR</td><td>HM401GR</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>PTC/1/02 poles</td><td>PTC0102</td></tr> <tr><td>PTC/1/03 poles</td><td>PTC0103</td></tr> <tr><td>PTC/1/05 poles</td><td>PTC0105</td></tr> <tr><td>PTC/1/10 poles</td><td>PTC0110</td></tr> <tr><td>PTC/1/00 (50 poles)</td><td>PTC0100</td></tr> <tr><td>17,5</td><td></td></tr> <tr><td>PTC/SP</td><td>PTC0990</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>DFH/1</td><td>DH01..</td></tr> <tr><td>DFM/500</td><td>DF500</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>SHZ/1</td><td>SH004</td></tr> <tr><td>CCH/2,5-4</td><td>CCH02</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>SHZ/1</td><td>SH004</td></tr> <tr><td>BTU for PR/DIN and PR/3</td><td>BT005</td></tr> <tr><td>BTO</td><td>BT007</td></tr> <tr><td>BT/3 for PR/3 only</td><td>BT003</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>PR/3/AC of steel</td><td>PR003</td></tr> <tr><td>PR/3/AS same with slots</td><td>PR005</td></tr> </tbody> </table>	Type	Cat. No.	HMT.1/PT/GR	HM401GR	-	-	PTC/1/02 poles	PTC0102	PTC/1/03 poles	PTC0103	PTC/1/05 poles	PTC0105	PTC/1/10 poles	PTC0110	PTC/1/00 (50 poles)	PTC0100	17,5		PTC/SP	PTC0990	-	-	DFH/1	DH01..	DFM/500	DF500	-	-	-	-	-	-	-	-	SHZ/1	SH004	CCH/2,5-4	CCH02	-	-	SHZ/1	SH004	BTU for PR/DIN and PR/3	BT005	BTO	BT007	BT/3 for PR/3 only	BT003	-	-	PR/3/AC of steel	PR003	PR/3/AS same with slots	PR005	<table border="1"> <thead> <tr> <th>Type</th> <th>Cat. No.</th> </tr> </thead> <tbody> <tr><td>HMT.1/1+2/PT/GR</td><td>HM411GR</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>PTC/1/02 poles</td><td>PTC0102</td></tr> <tr><td>PTC/1/03 poles</td><td>PTC0103</td></tr> <tr><td>PTC/1/05 poles</td><td>PTC0105</td></tr> <tr><td>PTC/1/10 poles</td><td>PTC0110</td></tr> <tr><td>PTC/1/00 (50 poles)</td><td>PTC0100</td></tr> <tr><td>17,5</td><td></td></tr> <tr><td>PTC/SP</td><td>PTC0990</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>DFH/2</td><td>DH02..</td></tr> <tr><td>DFM/500</td><td>DF500</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>SHZ/1</td><td>SH004</td></tr> <tr><td>CCH/2,5-4</td><td>CCH02</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>SHZ/1</td><td>SH004</td></tr> <tr><td>BTU for PR/DIN and PR/3</td><td>BT005</td></tr> <tr><td>BTO</td><td>BT007</td></tr> <tr><td>BT/3 for PR/3 only</td><td>BT003</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>PR/3/AC of steel</td><td>PR003</td></tr> <tr><td>PR/3/AS same with slots</td><td>PR005</td></tr> </tbody> </table>	Type	Cat. No.	HMT.1/1+2/PT/GR	HM411GR	-	-	PTC/1/02 poles	PTC0102	PTC/1/03 poles	PTC0103	PTC/1/05 poles	PTC0105	PTC/1/10 poles	PTC0110	PTC/1/00 (50 poles)	PTC0100	17,5		PTC/SP	PTC0990	-	-	DFH/2	DH02..	DFM/500	DF500	-	-	-	-	-	-	-	-	SHZ/1	SH004	CCH/2,5-4	CCH02	-	-	SHZ/1	SH004	BTU for PR/DIN and PR/3	BT005	BTO	BT007	BT/3 for PR/3 only	BT003	-	-	PR/3/AC of steel	PR003	PR/3/AS same with slots	PR005	<table border="1"> <thead> <tr> <th>Type</th> <th>Cat. No.</th> </tr> </thead> <tbody> <tr><td>HMT.1/2+2/PT/GR</td><td>HM421GR</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>PTC/1/02 poles</td><td>PTC0102</td></tr> <tr><td>PTC/1/03 poles</td><td>PTC0103</td></tr> <tr><td>PTC/1/05 poles</td><td>PTC0105</td></tr> <tr><td>PTC/1/10 poles</td><td>PTC0110</td></tr> <tr><td>PTC/1/00 (50 poles)</td><td>PTC0100</td></tr> <tr><td>17,5</td><td></td></tr> <tr><td>PTC/SP</td><td>PTC0990</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>DFH/3</td><td>DH03..</td></tr> <tr><td>DFM/500</td><td>DF500</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>SHZ/1</td><td>SH004</td></tr> <tr><td>CCH/2,5-4</td><td>CCH02</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>SHZ/1</td><td>SH004</td></tr> <tr><td>BTU for PR/DIN and PR/3</td><td>BT005</td></tr> <tr><td>BTO</td><td>BT007</td></tr> <tr><td>BT/3 for PR/3 only</td><td>BT003</td></tr> <tr><td>-</td><td>-</td></tr> <tr><td>PR/3/AC of steel</td><td>PR003</td></tr> <tr><td>PR/3/AS same with slots</td><td>PR005</td></tr> </tbody> </table>	Type	Cat. No.	HMT.1/2+2/PT/GR	HM421GR	-	-	PTC/1/02 poles	PTC0102	PTC/1/03 poles	PTC0103	PTC/1/05 poles	PTC0105	PTC/1/10 poles	PTC0110	PTC/1/00 (50 poles)	PTC0100	17,5		PTC/SP	PTC0990	-	-	DFH/3	DH03..	DFM/500	DF500	-	-	-	-	-	-	-	-	SHZ/1	SH004	CCH/2,5-4	CCH02	-	-	SHZ/1	SH004	BTU for PR/DIN and PR/3	BT005	BTO	BT007	BT/3 for PR/3 only	BT003	-	-	PR/3/AC of steel	PR003	PR/3/AS same with slots	PR005
Type	Cat. No.																																																																																																																																																																				
HMT.1/PT/GR	HM401GR																																																																																																																																																																				
-	-																																																																																																																																																																				
PTC/1/02 poles	PTC0102																																																																																																																																																																				
PTC/1/03 poles	PTC0103																																																																																																																																																																				
PTC/1/05 poles	PTC0105																																																																																																																																																																				
PTC/1/10 poles	PTC0110																																																																																																																																																																				
PTC/1/00 (50 poles)	PTC0100																																																																																																																																																																				
17,5																																																																																																																																																																					
PTC/SP	PTC0990																																																																																																																																																																				
-	-																																																																																																																																																																				
DFH/1	DH01..																																																																																																																																																																				
DFM/500	DF500																																																																																																																																																																				
-	-																																																																																																																																																																				
-	-																																																																																																																																																																				
-	-																																																																																																																																																																				
-	-																																																																																																																																																																				
SHZ/1	SH004																																																																																																																																																																				
CCH/2,5-4	CCH02																																																																																																																																																																				
-	-																																																																																																																																																																				
SHZ/1	SH004																																																																																																																																																																				
BTU for PR/DIN and PR/3	BT005																																																																																																																																																																				
BTO	BT007																																																																																																																																																																				
BT/3 for PR/3 only	BT003																																																																																																																																																																				
-	-																																																																																																																																																																				
PR/3/AC of steel	PR003																																																																																																																																																																				
PR/3/AS same with slots	PR005																																																																																																																																																																				
Type	Cat. No.																																																																																																																																																																				
HMT.1/1+2/PT/GR	HM411GR																																																																																																																																																																				
-	-																																																																																																																																																																				
PTC/1/02 poles	PTC0102																																																																																																																																																																				
PTC/1/03 poles	PTC0103																																																																																																																																																																				
PTC/1/05 poles	PTC0105																																																																																																																																																																				
PTC/1/10 poles	PTC0110																																																																																																																																																																				
PTC/1/00 (50 poles)	PTC0100																																																																																																																																																																				
17,5																																																																																																																																																																					
PTC/SP	PTC0990																																																																																																																																																																				
-	-																																																																																																																																																																				
DFH/2	DH02..																																																																																																																																																																				
DFM/500	DF500																																																																																																																																																																				
-	-																																																																																																																																																																				
-	-																																																																																																																																																																				
-	-																																																																																																																																																																				
-	-																																																																																																																																																																				
SHZ/1	SH004																																																																																																																																																																				
CCH/2,5-4	CCH02																																																																																																																																																																				
-	-																																																																																																																																																																				
SHZ/1	SH004																																																																																																																																																																				
BTU for PR/DIN and PR/3	BT005																																																																																																																																																																				
BTO	BT007																																																																																																																																																																				
BT/3 for PR/3 only	BT003																																																																																																																																																																				
-	-																																																																																																																																																																				
PR/3/AC of steel	PR003																																																																																																																																																																				
PR/3/AS same with slots	PR005																																																																																																																																																																				
Type	Cat. No.																																																																																																																																																																				
HMT.1/2+2/PT/GR	HM421GR																																																																																																																																																																				
-	-																																																																																																																																																																				
PTC/1/02 poles	PTC0102																																																																																																																																																																				
PTC/1/03 poles	PTC0103																																																																																																																																																																				
PTC/1/05 poles	PTC0105																																																																																																																																																																				
PTC/1/10 poles	PTC0110																																																																																																																																																																				
PTC/1/00 (50 poles)	PTC0100																																																																																																																																																																				
17,5																																																																																																																																																																					
PTC/SP	PTC0990																																																																																																																																																																				
-	-																																																																																																																																																																				
DFH/3	DH03..																																																																																																																																																																				
DFM/500	DF500																																																																																																																																																																				
-	-																																																																																																																																																																				
-	-																																																																																																																																																																				
-	-																																																																																																																																																																				
-	-																																																																																																																																																																				
SHZ/1	SH004																																																																																																																																																																				
CCH/2,5-4	CCH02																																																																																																																																																																				
-	-																																																																																																																																																																				
SHZ/1	SH004																																																																																																																																																																				
BTU for PR/DIN and PR/3	BT005																																																																																																																																																																				
BTO	BT007																																																																																																																																																																				
BT/3 for PR/3 only	BT003																																																																																																																																																																				
-	-																																																																																																																																																																				
PR/3/AC of steel	PR003																																																																																																																																																																				
PR/3/AS same with slots	PR005																																																																																																																																																																				

# HTE Series

## with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- for earth connection with yellow/green insulating body





yellow/green version	HTE.2 Cat. No. HT500	HTE.2/1+2 Cat. No. HT510	HTE.2/2+2 Cat. No. HT520																																																																																																																																																						
<b>TECHNICAL CHARACTERISTICS</b>																																																																																																																																																									
function / type	earth	earth, 1 input and 2 outputs	earth, 2 inputs and 2 outputs																																																																																																																																																						
rated cross-section (mm <sup>2</sup> )	2,5	2,5	2,5																																																																																																																																																						
connecting capacity																																																																																																																																																									
flexible (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4	0,2 ÷ 4																																																																																																																																																						
rigid (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 4	0,2 ÷ 4																																																																																																																																																						
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14	2,5 - WP25/14	2,5 - WP25/14																																																																																																																																																						
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / - / A3	- / - / A3	- / - / A3																																																																																																																																																						
rated voltage / rated current / AWG	- / - / 24-12 AWG	- / - / 24-12 AWG	- / - / 24-12 AWG																																																																																																																																																						
rated impulse withstand voltage / pollution degree	8 KV / 3	8 KV / 3	8 KV / 3																																																																																																																																																						
insulation stripping length (mm)	13	13	13																																																																																																																																																						
height / width / thickness	41 / 54 / 5,2	41 / 70 / 5,2	41 / 82 / 5,2																																																																																																																																																						
height / width / thickness	49 / 54 / 5,2	49 / 70 / 5,2	49 / 82 / 5,2																																																																																																																																																						
height / width / thickness	-	-	-																																																																																																																																																						
<b>APPROVALS</b>																																																																																																																																																									
<b>ACCESSORIES</b>																																																																																																																																																									
End sections	grey blue																																																																																																																																																								
Permanent cross connection																																																																																																																																																									
Rated current carrying capacity of jumper (A)																																																																																																																																																									
Cross-connection identification strip (100 mm)	green																																																																																																																																																								
Multiple common bar	250 mm																																																																																																																																																								
Shunting screw and sleeve																																																																																																																																																									
Coloured partition	red, green, white																																																																																																																																																								
Cross connection barrier	red																																																																																																																																																								
Test plug socket																																																																																																																																																									
Test plug																																																																																																																																																									
Modular test plug																																																																																																																																																									
End section for modular test plug																																																																																																																																																									
Numbering strip																																																																																																																																																									
Screwdriver for the activation of the spring																																																																																																																																																									
Warning plate	on adjacent terminal blocks																																																																																																																																																								
Marking tag	printed or blank																																																																																																																																																								
End bracket																																																																																																																																																									
Mounting rail according to IEC 60715 Std.																																																																																																																																																									
	<table border="1"> <thead> <tr> <th>Type</th> <th>Cat. No.</th> </tr> </thead> <tbody> <tr> <td>HMT.2/PT/GR</td> <td>HM501GR</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>PTC/03/02 poles</td> <td>PTC0302</td> </tr> <tr> <td>PTC/03/03 poles</td> <td>PTC0303</td> </tr> <tr> <td>PTC/03/05 poles</td> <td>PTC0305</td> </tr> <tr> <td>PTC/03/10 poles</td> <td>PTC0310</td> </tr> <tr> <td>PTC/03/00 (47 poles)</td> <td>PTC0300</td> </tr> <tr> <td>24</td> <td></td> </tr> <tr> <td>PTC/SP</td> <td>PTC0990</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>DFH/1</td> <td>DH01..</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>SDD/1</td> <td>DD001</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>CNU/8/51</td> <td>NU0851</td> </tr> <tr> <td>CCH/2,5-4</td> <td>CCH02</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>CNU/8/51</td> <td>NU0851</td> </tr> <tr> <td>BTU for PR/DIN and PR/3</td> <td>BT005</td> </tr> <tr> <td>BTO</td> <td>BT007</td> </tr> <tr> <td>BT/3 for PR/3 only</td> <td>BT003</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>PR/3/AC of steel</td> <td>PR003</td> </tr> <tr> <td>PR/3/AS same with slots</td> <td>PR005</td> </tr> </tbody> </table>	Type	Cat. No.	HMT.2/PT/GR	HM501GR	-	-	PTC/03/02 poles	PTC0302	PTC/03/03 poles	PTC0303	PTC/03/05 poles	PTC0305	PTC/03/10 poles	PTC0310	PTC/03/00 (47 poles)	PTC0300	24		PTC/SP	PTC0990	-	-	DFH/1	DH01..	-	-	SDD/1	DD001	-	-	CNU/8/51	NU0851	CCH/2,5-4	CCH02	-	-	CNU/8/51	NU0851	BTU for PR/DIN and PR/3	BT005	BTO	BT007	BT/3 for PR/3 only	BT003	-	-	PR/3/AC of steel	PR003	PR/3/AS same with slots	PR005	<table border="1"> <thead> <tr> <th>Type</th> <th>Cat. No.</th> </tr> </thead> <tbody> <tr> <td>HMT.2/1+2/PT/GR</td> <td>HM511GR</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>PTC/03/02 poles</td> <td>PTC0302</td> </tr> <tr> <td>PTC/03/03 poles</td> <td>PTC0303</td> </tr> <tr> <td>PTC/03/05 poles</td> <td>PTC0305</td> </tr> <tr> <td>PTC/03/10 poles</td> <td>PTC0310</td> </tr> <tr> <td>PTC/03/00 (47 poles)</td> <td>PTC0300</td> </tr> <tr> <td>24</td> <td></td> </tr> <tr> <td>PTC/SP</td> <td>PTC0990</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>DFH/2</td> <td>DH02..</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>SDD/1</td> <td>DD001</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>CNU/8/51</td> <td>NU0851</td> </tr> <tr> <td>CCH/2,5-4</td> <td>CCH02</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>CNU/8/51</td> <td>NU0851</td> </tr> <tr> <td>BTU for PR/DIN and PR/3</td> <td>BT005</td> </tr> <tr> <td>BTO</td> <td>BT007</td> </tr> <tr> <td>BT/3 for PR/3 only</td> <td>BT003</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>PR/3/AC of steel</td> <td>PR003</td> </tr> <tr> <td>PR/3/AS same with slots</td> <td>PR005</td> </tr> </tbody> </table>	Type	Cat. No.	HMT.2/1+2/PT/GR	HM511GR	-	-	PTC/03/02 poles	PTC0302	PTC/03/03 poles	PTC0303	PTC/03/05 poles	PTC0305	PTC/03/10 poles	PTC0310	PTC/03/00 (47 poles)	PTC0300	24		PTC/SP	PTC0990	-	-	DFH/2	DH02..	-	-	SDD/1	DD001	-	-	CNU/8/51	NU0851	CCH/2,5-4	CCH02	-	-	CNU/8/51	NU0851	BTU for PR/DIN and PR/3	BT005	BTO	BT007	BT/3 for PR/3 only	BT003	-	-	PR/3/AC of steel	PR003	PR/3/AS same with slots	PR005	<table border="1"> <thead> <tr> <th>Type</th> <th>Cat. No.</th> </tr> </thead> <tbody> <tr> <td>HMT.2/2+2/PT/GR</td> <td>HM521GR</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>PTC/03/02 poles</td> <td>PTC0302</td> </tr> <tr> <td>PTC/03/03 poles</td> <td>PTC0303</td> </tr> <tr> <td>PTC/03/05 poles</td> <td>PTC0305</td> </tr> <tr> <td>PTC/03/10 poles</td> <td>PTC0310</td> </tr> <tr> <td>PTC/03/00 (47 poles)</td> <td>PTC0300</td> </tr> <tr> <td>24</td> <td></td> </tr> <tr> <td>PTC/SP</td> <td>PTC0990</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>DFH/3</td> <td>DH03..</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>SDD/1</td> <td>DD001</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>CNU/8/51</td> <td>NU0851</td> </tr> <tr> <td>CCH/2,5-4</td> <td>CCH02</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>CNU/8/51</td> <td>NU0851</td> </tr> <tr> <td>BTU for PR/DIN and PR/3</td> <td>BT005</td> </tr> <tr> <td>BTO</td> <td>BT007</td> </tr> <tr> <td>BT/3 for PR/3 only</td> <td>BT003</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>PR/3/AC of steel</td> <td>PR003</td> </tr> <tr> <td>PR/3/AS same with slots</td> <td>PR005</td> </tr> </tbody> </table>	Type	Cat. No.	HMT.2/2+2/PT/GR	HM521GR	-	-	PTC/03/02 poles	PTC0302	PTC/03/03 poles	PTC0303	PTC/03/05 poles	PTC0305	PTC/03/10 poles	PTC0310	PTC/03/00 (47 poles)	PTC0300	24		PTC/SP	PTC0990	-	-	DFH/3	DH03..	-	-	SDD/1	DD001	-	-	CNU/8/51	NU0851	CCH/2,5-4	CCH02	-	-	CNU/8/51	NU0851	BTU for PR/DIN and PR/3	BT005	BTO	BT007	BT/3 for PR/3 only	BT003	-	-	PR/3/AC of steel	PR003	PR/3/AS same with slots	PR005
Type	Cat. No.																																																																																																																																																								
HMT.2/PT/GR	HM501GR																																																																																																																																																								
-	-																																																																																																																																																								
PTC/03/02 poles	PTC0302																																																																																																																																																								
PTC/03/03 poles	PTC0303																																																																																																																																																								
PTC/03/05 poles	PTC0305																																																																																																																																																								
PTC/03/10 poles	PTC0310																																																																																																																																																								
PTC/03/00 (47 poles)	PTC0300																																																																																																																																																								
24																																																																																																																																																									
PTC/SP	PTC0990																																																																																																																																																								
-	-																																																																																																																																																								
DFH/1	DH01..																																																																																																																																																								
-	-																																																																																																																																																								
SDD/1	DD001																																																																																																																																																								
-	-																																																																																																																																																								
CNU/8/51	NU0851																																																																																																																																																								
CCH/2,5-4	CCH02																																																																																																																																																								
-	-																																																																																																																																																								
CNU/8/51	NU0851																																																																																																																																																								
BTU for PR/DIN and PR/3	BT005																																																																																																																																																								
BTO	BT007																																																																																																																																																								
BT/3 for PR/3 only	BT003																																																																																																																																																								
-	-																																																																																																																																																								
PR/3/AC of steel	PR003																																																																																																																																																								
PR/3/AS same with slots	PR005																																																																																																																																																								
Type	Cat. No.																																																																																																																																																								
HMT.2/1+2/PT/GR	HM511GR																																																																																																																																																								
-	-																																																																																																																																																								
PTC/03/02 poles	PTC0302																																																																																																																																																								
PTC/03/03 poles	PTC0303																																																																																																																																																								
PTC/03/05 poles	PTC0305																																																																																																																																																								
PTC/03/10 poles	PTC0310																																																																																																																																																								
PTC/03/00 (47 poles)	PTC0300																																																																																																																																																								
24																																																																																																																																																									
PTC/SP	PTC0990																																																																																																																																																								
-	-																																																																																																																																																								
DFH/2	DH02..																																																																																																																																																								
-	-																																																																																																																																																								
SDD/1	DD001																																																																																																																																																								
-	-																																																																																																																																																								
CNU/8/51	NU0851																																																																																																																																																								
CCH/2,5-4	CCH02																																																																																																																																																								
-	-																																																																																																																																																								
CNU/8/51	NU0851																																																																																																																																																								
BTU for PR/DIN and PR/3	BT005																																																																																																																																																								
BTO	BT007																																																																																																																																																								
BT/3 for PR/3 only	BT003																																																																																																																																																								
-	-																																																																																																																																																								
PR/3/AC of steel	PR003																																																																																																																																																								
PR/3/AS same with slots	PR005																																																																																																																																																								
Type	Cat. No.																																																																																																																																																								
HMT.2/2+2/PT/GR	HM521GR																																																																																																																																																								
-	-																																																																																																																																																								
PTC/03/02 poles	PTC0302																																																																																																																																																								
PTC/03/03 poles	PTC0303																																																																																																																																																								
PTC/03/05 poles	PTC0305																																																																																																																																																								
PTC/03/10 poles	PTC0310																																																																																																																																																								
PTC/03/00 (47 poles)	PTC0300																																																																																																																																																								
24																																																																																																																																																									
PTC/SP	PTC0990																																																																																																																																																								
-	-																																																																																																																																																								
DFH/3	DH03..																																																																																																																																																								
-	-																																																																																																																																																								
SDD/1	DD001																																																																																																																																																								
-	-																																																																																																																																																								
CNU/8/51	NU0851																																																																																																																																																								
CCH/2,5-4	CCH02																																																																																																																																																								
-	-																																																																																																																																																								
CNU/8/51	NU0851																																																																																																																																																								
BTU for PR/DIN and PR/3	BT005																																																																																																																																																								
BTO	BT007																																																																																																																																																								
BT/3 for PR/3 only	BT003																																																																																																																																																								
-	-																																																																																																																																																								
PR/3/AC of steel	PR003																																																																																																																																																								
PR/3/AS same with slots	PR005																																																																																																																																																								

# HTE Series

## with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- for earth connection with yellow/green insulating body

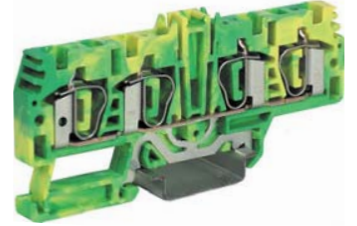

yellow/green version	HTE.4	HTE.4/1+2	HTE.4/2+2
	Cat. No. <b>HT250</b>	Cat. No. <b>HT260</b>	Cat. No. <b>HT270</b>
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	earth	earth, 1 input and 2 outputs	earth, 2 inputs and 2 outputs
rated cross-section (mm <sup>2</sup> )	4	4	4
connecting capacity			
flexible (mm <sup>2</sup> )	0,2 ÷ 6	0,2 ÷ 6	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6	0,2 ÷ 6	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16	4 - WP40/16	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / - / A4	- / - / A4	- / - / A4
rated voltage / rated current / AWG UL	- / - / 24-10 AWG	-	-
rated impulse withstand voltage / pollution degree	8 KV / 3	8 KV / 3	8 KV / 3
insulation stripping length (mm)	17	17	17
height / width / thickness	45 / 58 / 6,2	45 / 78 / 6,2	45 / 98 / 6,2
height / width / thickness	52 / 58 / 6,2	52 / 78 / 6,2	52 / 98 / 6,2
height / width / thickness	-	-	-
<b>APPROVALS</b>			
<b>ACCESSORIES</b>	<b>Type</b>	<b>Type</b>	<b>Type</b>
End sections	<b>HMT.4/PT/GR</b>	<b>HMT.4/1+2/PT/GR</b>	<b>HMT.4/2+2/PT/GR</b>
Permanent cross connection	<b>PTC/5/02</b> poles	<b>PTC/5/02</b> poles	<b>PTC/5/02</b> poles
	<b>PTC/5/03</b> poles	<b>PTC/5/03</b> poles	<b>PTC/5/03</b> poles
	<b>PTC/5/05</b> poles	<b>PTC/5/05</b> poles	<b>PTC/5/05</b> poles
	<b>PTC/5/10</b> poles	<b>PTC/5/10</b> poles	<b>PTC/5/10</b> poles
	<b>PTC/5/00</b> (40 poles)	<b>PTC/5/00</b> (40 poles)	<b>PTC/5/00</b> (40 poles)
Rated current carrying capacity of jumper (A)	<b>32</b>	<b>32</b>	<b>32</b>
Cross-connection identification strip (100 mm)	<b>PTC/SP</b>	<b>PTC/SP</b>	<b>PTC/SP</b>
Multiple common bar	-	-	-
Shunting screw and sleeve	-	-	-
Coloured partition	<b>DFH/1</b>	<b>DFH/1</b>	<b>DFH/1</b>
Cross connection barrier	-	-	-
Test plug socket	-	-	-
Test plug	<b>SDD/1</b>	<b>SDD/1</b>	<b>SDD/1</b>
Modular test plug	-	-	-
End section for modular test plug	-	-	-
Numbering strip	<b>CNU/8/61</b>	<b>CNU/8/61</b>	<b>CNU/8/61</b>
Screwdriver for the activation of the spring	<b>CCH/2,5-4</b>	<b>CCH/2,5-4</b>	<b>CCH/2,5-4</b>
Warning plate	-	-	-
Marking tag	<b>CNU/8/61</b>	<b>CNU/8/61</b>	<b>CNU/8/61</b>
End bracket	<b>BTU</b> for PR/DIN and PR/3	<b>BTU</b> for PR/DIN and PR/3	<b>BTU</b> for PR/DIN and PR/3
	<b>BTO</b>	<b>BTO</b>	<b>BTO</b>
	<b>BT/3</b> for PR/3 only	<b>BT/3</b> for PR/3 only	<b>BT/3</b> for PR/3 only
Mounting rail according to IEC 60715 Std.	<b>PR/3/AC</b> of steel	<b>PR/3/AC</b> of steel	<b>PR/3/AC</b> of steel
	<b>PR/3/AS</b> same with slots	<b>PR/3/AS</b> same with slots	<b>PR/3/AS</b> same with slots

# HTE Series

## with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- for earth connection with yellow/green insulating body



yellow/green version	HTE.6	HTE.10	HTE.16
	Cat. No. <b>HT320</b>	Cat. No. <b>HT330</b>	Cat. No. <b>HT340</b>
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	earth	earth	earth
rated cross-section (mm <sup>2</sup> )	6	10	16
connecting capacity			
flexible (mm <sup>2</sup> )	0,2 ÷ 10	1,5 ÷ 16	1,5 ÷ 25
rigid (mm <sup>2</sup> )	0,2 ÷ 10	1,5 ÷ 16	1,5 ÷ 25
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	6 - WP60/20	10 - WP100/21	16 - WP160/22
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / - / A5	- / - / A6	- / - / A7
rated voltage / rated current / AWG UL	- / - / 24-8 AWG	-	-
rated impulse withstand voltage / pollution degree	8 KV / 3	12 KV / 3	12 KV / 3
insulation stripping length (mm)	18	18	18
height / width / thickness	44 / 62 / 8,2	53 / 71 / 10	56 / 80 / 12
height / width / thickness	52 / 62 / 8,2	61 / 70 / 10	64 / 80 / 12
height / width / thickness	-	-	-
		KEMA-KEUR, UL, cUL, ENEL Distribuzione pending	KEMA-KEUR, UL, cUL, ENEL Distribuzione pending
<b>APPROVALS</b>			
<b>ACCESSORIES</b>	<b>Type</b>	<b>Type</b>	<b>Type</b>
End sections	<b>HMT.6/PT/GR</b>	<b>HMT.10/PT</b>	<b>HMT.16/PT</b>
grey blue	HM321GR	HM331GR	HM341GR
Permanent cross connection	<b>PTC/8/02</b> poles	<b>PTC/11/02</b> poles	<b>PTC/16/02</b> poles
	PTC0802	PTC1102	PTC1602
	<b>PTC/8/03</b> poles	<b>PTC/11/03</b> poles	<b>PTC/16/03</b> poles
	PTC0803	PTC1103	PTC1603
	<b>PTC/8/05</b> poles	<b>PTC/11/05</b> poles	<b>PTC/16/05</b> poles
	PTC0805	PTC1105	PTC1605
	<b>PTC/8/10</b> poles	<b>PTC/11/10</b> poles	<b>PTC/16/10</b> poles
	PTC0810	PTC1110	PTC1610
	<b>PTC/8/00</b> (30 poles)	<b>PTC/11/00</b> (25 poles)	<b>PTC/16/00</b> (20 poles)
	PTC0800	PTC1100	PTC1600
Rated current carrying capacity of jumper (A)	<b>41</b>	<b>57</b>	<b>76</b>
Cross-connection identification strip (100 mm)	<b>PTC/SP</b>	-	-
green	PTC0990	-	-
Multiple common bar	-	-	-
250 mm	-	-	-
Shunting screw and sleeve	-	-	-
Coloured partition	<b>DFH/1</b>	<b>DFH/4</b>	<b>DFH/4</b>
red, green, white	DH01..	DH04..	DH04..
Cross connection barrier	-	-	-
red	-	-	-
Test plug socket	-	-	-
Test plug	<b>SDD/1</b>	<b>SDD/1</b>	<b>SDD/1</b>
Modular test plug	DD001	DD001	DD001
End section for modular test plug	-	-	-
Numbering strip	-	-	-
Screwdriver for the activation of the spring	<b>CNU/8/51</b>	<b>SNZ/10</b>	-
	NU0851	SN005	-
Warning plate	<b>CCH/2,5-4</b>	<b>CCH/4</b>	<b>CCH/4</b>
on adjacent terminal blocks	CCH02	CCH02	CCH02
Marking tag	<b>CNU/8/51</b>	<b>CNU/8/51</b>	<b>CNU/8/51</b>
printed or blank	NU0851	NU0851	NU0851
End bracket	<b>BTU</b> for PR/DIN and PR/3	<b>BTU</b> for PR/DIN and PR/3	<b>BTU</b> for PR/DIN and PR/3
	BT005	BT005	BT005
	<b>BTO</b>	<b>BTO</b>	<b>BTO</b>
	BT007	BT007	BT007
	<b>BT/3</b> for PR/3 only	<b>BT/3</b> for PR/3 only	<b>BT/3</b> for PR/3 only
	BT003	BT003	BT003
Mounting rail according to IEC 60715 Std.	-	-	-
	<b>PR/3/AC</b> of steel	<b>PR/3/AC</b> of steel	<b>PR/3/AC</b> of steel
	PR003	PR003	PR003
	<b>PR/3/AS</b> same with slots	<b>PR/3/AS</b> same with slots	<b>PR/3/AS</b> same with slots
	PR005	PR005	PR005

# H Series

## with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- double possibility of PTC – "Easy Bridge" multi-pole cross connection, on each level
- available in standard (grey RAL 7042 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions, where indicated




detail of PTC jumper and DFM barrier with numbering



detail of composable test plug

The **/GR** tag indicates the grey colour version.



HMD.2 terminal block with PHD.2 jumper

Please refer to the table on page 136 in order to determine the insulation voltage of the different PTC connection diagrams

<b>grey version</b>	
<b>(Ex)i version</b>	
<b>version with permanent internal connection</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

<b>HMD.1/GR</b>	Cat. No. <b>HD200GR</b>
<b>HMD.1 (Ex)i</b>	Cat. No. <b>HD300</b>
<b>HMD.1/CI/GR</b>	Cat. No. <b>HD120GR</b>
two-level feed-through	
1,5	
0,2 ÷ 2,5	
0,2 ÷ 2,5	
1,5 - WP15/14	
500 V / 17,5 A / B2	
600 V / 15 A / 26-14 AWG	
6 KV / 3	
10	
59 / 73 / 4,2	
67 / 73 / 4,2	
-	

<b>HMD.2N/GR</b>	Cat. No. <b>HD400GR</b>
<b>HMD.2N (Ex)i</b>	Cat. No. <b>HD410</b>
<b>HMD.2N/CI/GR</b>	Cat. No. <b>HD450GR</b>
two-level feed-through	
2,5	
0,2 ÷ 2,5	
0,2 ÷ 2,5	
1,5 - WP15/14	
630 V / 24 A / B2	
600 V / 15 A / 26-14 AWG	
8 KV / 3	
10	
59 / 73 / 5,2	
67 / 73 / 5,2	
-	

<b>HMD.2/GR</b>	Cat. No. <b>HD100GR</b>
two-level feed-through	
2,5	
0,2 ÷ 4	
0,2 ÷ 4	
1,5 - WP15/14	
800 V / 24 A / A3	
600 V / 20 A / 24-12 AWG	
8 KV / 3	
10	
49 / 91 / 5,2	
56 / 91 / 5,2	
-	

### APPROVALS



Approvals referred to HMD.1 standard version



Approvals referred to HMD.2N standard version



<b>ACCESSORIES</b>	
End sections	grey blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross-connection identification strip (100 mm)	green
Internal cross connection (removable)	
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Screwdriver for the activation of the spring	
Warning plate	on adjacent terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>HMD.1/PT/GR</b>	HD201GR
<b>HMD.1/PT (Ex)i</b>	HI301
<b>PTC/1/02 poles</b>	PTC0102
<b>PTC/1/03 poles</b>	PTC0103
<b>PTC/1/05 poles</b>	PTC0105
<b>PTC/1/10 poles</b>	PTC0110
<b>PTC/1/00 (50 poles)</b>	PTC0100
<b>17,5</b>	
<b>PTC/SP</b>	PTC0990
-	
<b>DFU/07</b>	DU07..
<b>DFM/500</b>	DF500
-	
<b>SDH/4-SDH/4P</b>	DH004-DH04P
<b>SH4/PT</b>	DH401
<b>SHZ/1</b>	SH004
<b>CCH/2,5-4</b>	CCH02
-	
<b>SHZ/1</b>	SH004
<b>BTU for PR/DIN and PR/3</b>	BT005
<b>BTO</b>	BT007
<b>BT/3 for PR/3 only</b>	BT003
-	
<b>PR/3/AC of steel</b>	PR003
<b>PR/3/AS same with slots</b>	PR005

Type	Cat. No.
<b>HMD.1/PT/GR</b>	HD201GR
<b>HMD.1/PT (Ex)i</b>	HI301
<b>PTC/03/02 poles</b>	PTC0302
<b>PTC/03/03 poles</b>	PTC0303
<b>PTC/03/05 poles</b>	PTC0305
<b>PTC/03/10 poles</b>	PTC0310
<b>PTC/03/00 (50 poles)</b>	PTC0300
<b>24</b>	
<b>PTC/SP</b>	PTC0990
-	
<b>DFU/07</b>	DU07..
<b>DFM/500</b>	DF500
-	
<b>SDH/7</b>	DH007
<b>SH7/PT</b>	DH701
<b>CNU/8/51</b>	NU0851
<b>CCH/2,5-4</b>	CCH02
-	
<b>CNU/8/51</b>	NU0851
<b>BTU for PR/DIN and PR/3</b>	BT005
<b>BTO</b>	BT007
<b>BT/3 for PR/3 only</b>	BT003
-	
<b>PR/3/AC of steel</b>	PR003
<b>PR/3/AS same with slots</b>	PR005

Type	Cat. No.
<b>HMD/PT/GR</b>	HD101GR
-	
<b>PH/2,5-4</b>	PH100
<b>PHD/2</b>	PHD02
-	
<b>24</b>	
-	
<b>PHD/2</b>	PHD02
-	
<b>DFH/4</b>	DH04..
-	
-	
<b>SDD/1</b>	DD001
-	
-	
<b>CNU/8/51</b>	NU0851
<b>CCH/2,5-4</b>	CCH02
-	
<b>CNU/8/51</b>	NU0851
(solo su piano inferiore)	
<b>BTU for PR/DIN and PR/3</b>	BT005
<b>BTO</b>	BT007
<b>BT/3 for PR/3 only</b>	BT003
-	
<b>PR/3/AC of steel</b>	PR003
<b>PR/3/AS same with slots</b>	PR005



# H Series

## with polyamide insulating body

- UL94V-0
- versions suited to contain electronic components
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- available in standard (grey RAL 7042 colour) or (Ex) "intrinsic safety" circuits (blue RAL 5015 colour) versions, where indicated



(\* values referred to the insulation characteristics of the terminal block and to the connection unit

The **/GR** tag indicates the grey colour version.

max. thickness of the mounted components: 3,4 mm

max. thickness of the mounted components: 3,9 mm

grey version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

HMD.1/X/GR	Cat. No. HD130GR
two level, arranged to contain electronic components	
1,5	
0,2 ÷ 2,5	
0,2 ÷ 2,5	
1,5 - WP15/14	
500 V (*) / 17,5 A (*) / B2	
-	
6 kV / 3 (*)	
10	
59 / 73 / 4,2	
67 / 73 / 4,2	
-	

HMD.2N/X/GR	Cat. No. HD440GR
two level, arranged to contain electronic components	
2,5	
0,2 ÷ 2,5	
0,2 ÷ 2,5	
1,5 - WP15/14	
630 V (*) / 24 A (*) / B2	
-	
6 kV / 3 (*)	
10	
59 / 73 / 5,2	
67 / 73 / 5,2	
-	

HMD.2N/DD/GR	Cat. No. HD420GR
version equipped with two 1N4007 diodes in feed-through configuration for each level	

## APPROVALS

Approvals referred to HMD.1 standard version

Approvals referred to HMD.2N standard version

ACCESSORIES	
End sections	grey beige
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Screwdriver for the activation of the spring	
Warning plate	on adjacent terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
HMD.1/PT/GR	HD201GR
-	
PTC/1/02 poles	PTC0102
PTC/1/03 poles	PTC0103
PTC/1/05 poles	PTC0105
PTC/1/10 poles	PTC0110
PTC/1/00 (50 poles)	PTC0100
17,5	
-	
DFU/7	DU07..
DFM/500	DF500
-	
SDH/4-SDH/4P	DH004-DH04P
SH4/PT	DH401
SHZ/1	SH004
CCH/2,5-4	CCH02
-	
SHZ/1	SH004
BTU for PR/DIN and PR/3	BT005
BT0	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
HMD.1/PT/GR	HD201GR
-	
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (50 poles)	PTC0300
24	
-	
DFU/7	DU07..
DFM/500	DF500
-	
SDH/7	DH007
SH7/PT	DH701
CNU/8/51	NU0851
CCH/2,5-4	CCH02
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT0	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

HMD.2/3DC/GR	Cat. No. HD430GR
--------------	------------------

version equipped with three 1N4007 diodes and shared cathode	

# H Series

## with polyamide insulating body

- UL94V-0
- version suited to house a connector / test plug as well as electronic components
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- available in standard (grey RAL 7042 colour) or (Ex) "intrinsic safety" circuits (blue RAL 5015 colour) versions, where indicated



detail of modular test plug / composable connector

The **/GR** tag indicates the grey colour version.

max. thickness of the mounted components:  
3,9 mm

grey version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

HMD.2N/X1/GR	
Cat. No. HD441GR	
two-level, upper feed-through and lower disconnect	
2,5	
0,2 ÷ 2,5	
0,2 ÷ 2,5	
1,5 - WP15/14	
630 V / 24 A / B2	
-	
8 KV / 3	
10	
59 / 73 / 5,2	
67 / 73 / 5,2	
-	

### APPROVALS

KEMA-KEUR, UL and cUL pending

ACCESSORIES	
End sections	grey beige
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Striscia di segnalazione ponte	100 mm
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Screwdriver for the activation of the spring	
Warning plate	on adjacent terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
HMD.1/PT/GR	HD201GR
-	
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
PTC/SP	PTC0990
-	
DFU/7	DU07..
DFM/500	DF500
-	
SDH/7	DH007
SH7/PT	DH701
CNU/8/51	NU0851
CCH/2,5-4	CCH02
-	
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT0	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

# H Series

## with polyamide insulating body

- Mounting onto PR/3, TH/35 type rails, according to IEC 60715 Std.
- Three feed-through levels / Two feed-through levels + earth
- Available in grey (RAL 7042) colour or Earth, with green/yellow insulating casing
- “Easy bridge” jumpering system: double insertion possibility of PTC multi-pole cross-connections, without the need of an insulating protection
- **HLD.2** and **HDE.2**: Possibility to house electronic components between the three levels and having max. thickness of 3,9 mm
- Coupling possibility with each others



**NEW**  
cabur



**NEW**  
cabur



**NEW**  
cabur

PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING

Insulation voltage in the above configurations (V) acc. to IEC 60947-7-1 (*)					
upper level	500	500	500 (**)	500	500
intermediate level	500	500	500 (**)		
lower level (HLD.2... only)	500	500	500 (**)		

Note (\*) for HLD.2 and HDE.2 only (\*\*) interposing an end section

The /GR tag indicates the grey colour version.

**NEW** **grey coloured version (/earth)**

**version with internal cross-connection**

**(Ex)i version**

**TECHNICAL CHARACTERISTICS**

function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

**HLD.2/GR** Cat. No. **HL200GR**

**HLD.2/CI/GR** Cat. No. **HL210GR**

**HLD.2 (Ex)i** Cat. No. **HD510GR**

Three feed-through levels	2,5
0,2 ÷ 2,5	0,2 ÷ 2,5
0,2 ÷ 2,5	0,2 ÷ 2,5
1,5 - WP15/14	1,5 - WP15/14
500 V / 24 A / B2	500 V / 24 A / B2
-	-
8 KV / 3	8 KV / 3
10	10
-	-
75 / 95 / 5,2	75 / 95 / 5,2
83 / 95 / 5,2	83 / 95 / 5,2
-	-

KEMA-KEUR approvals, UL and cUL pending

**HDE.2/GR** Cat. No. **HL500GR**

Two feed-through levels + earth	2,5
0,2 ÷ 2,5	0,2 ÷ 2,5
0,2 ÷ 2,5	0,2 ÷ 2,5
1,5 - WP15/14	1,5 - WP15/14
500 V / 24 A / B2	500 V / 24 A / B2
-	-
8 KV / 3	8 KV / 3
10	10
-	-
75 / 95 / 5,2	75 / 95 / 5,2
83 / 95 / 5,2	83 / 95 / 5,2
-	-

KEMA-KEUR approvals, UL and cUL pending

**HTTE.2** Cat. No. **HLT500**

Three cross-connected earth levels	2,5
0,2 ÷ 2,5	0,2 ÷ 2,5
0,2 ÷ 2,5	0,2 ÷ 2,5
1,5 - WP15/14	1,5 - WP15/14
- / - / B2	- / - / B2
-	-
8 KV / 3	8 KV / 3
10	10
-	-
75 / 95 / 5,2	75 / 95 / 5,2
83 / 95 / 5,2	83 / 95 / 5,2
-	-

KEMA-KEUR approvals, UL and cUL pending

**APPROVALS**

**ACCESSORIES**

End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross connection identification strip (100 mm)	green
Cross connection barrier	
Coloured partition	red, green, white
Test plug socket	
Numbering strip	
Miniature fuse	Ø 5 x 20 mm
Screwdriver for the activation of the spring	
Short circuit screw and sleeve (with plug)	
Short circuit plate	for 2 adjoining terminal blocks for 4 adjoining terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
<b>HLD.2/PT/GR</b>	HL201GR
-	-
-	-
<b>PTC/03/02</b> poli	PTC0302
<b>PTC/03/03</b> poli	PTC0303
<b>PTC/03/05</b> poli	PTC0305
<b>PTC/03/10</b> poli	PTC0310
<b>PTC/03/00</b> (47 poli)	PTC0300
<b>24</b>	-
-	-
<b>DFM/500</b>	DF500
-	-
<b>CNU/8/51</b>	NU0851
<b>CCH/2,5-4</b>	CCH02
-	-
-	-
<b>CNU/8/51</b>	NU0851
-	-
<b>BTU</b> per PR/DIN e PR/3	BT005
<b>BTO</b>	BT007
<b>BT/3</b> solo per PR/3	BT003
-	-
<b>PR/3/AC</b> in acciaio	PR003
<b>PR/3/AS</b> idem con asole	PR005

Type	Cat. No.
<b>HLD.2/PT/GR</b>	HL201GR
-	-
-	-
<b>PTC/03/02</b> poli	PTC0302
<b>PTC/03/03</b> poli	PTC0303
<b>PTC/03/05</b> poli	PTC0305
<b>PTC/03/10</b> poli	PTC0310
<b>PTC/03/00</b> (47 poli)	PTC0300
<b>24</b>	-
-	-
<b>DFM/500</b>	DF500
-	-
<b>CNU/8/51</b>	NU0851
<b>CCH/2,5-4</b>	CCH02
-	-
-	-
<b>CNU/8/51</b>	NU0851
-	-
<b>BTU</b> per PR/DIN e PR/3	BT005
<b>BTO</b>	BT007
<b>BT/3</b> solo per PR/3	BT003
-	-
<b>PR/3/AC</b> in acciaio	PR003
<b>PR/3/AS</b> idem con asole	PR005

Type	Cat. No.
<b>HLD.2/PT/GR</b>	HL201GR
-	-
-	-
<b>PTC/03/02</b> poli	PTC0302
<b>PTC/03/03</b> poli	PTC0303
<b>PTC/03/05</b> poli	PTC0305
<b>PTC/03/10</b> poli	PTC0310
<b>PTC/03/00</b> (47 poli)	PTC0300
<b>24</b>	-
-	-
<b>DFM/500</b>	DF500
-	-
<b>CNU/8/51</b>	NU0851
<b>CCH/2,5-4</b>	CCH02
-	-
-	-
<b>CNU/8/51</b>	NU0851
-	-
<b>BTU</b> per PR/DIN e PR/3	BT005
<b>BTO</b>	BT007
<b>BT/3</b> solo per PR/3	BT003
-	-
<b>PR/3/AC</b> in acciaio	PR003
<b>PR/3/AS</b> idem con asole	PR005


# H Series

## with polyamide insulating body

- UL94V-0
- disconnect by lever and by slide link
- for test and measurement circuits
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- available in standard (grey RAL 7042 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions, where indicated



Please refer to the table on page 136 in order to determine the insulation voltage of the different PTC connection diagrams



Terminal block with short circuit plate and test plug

The **/GR** tag indicates the grey colour version.

grey version	HMS.2/GR Cat. No. HS200GR	HSCB.4/GR Cat. No. HB100GR	HSCB.6/GR Cat. No. HB200GR
<b>(Ex)i version</b>			
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	disconnect by lever	disconnect by slide link	disconnect by slide link
rated cross-section (mm <sup>2</sup> )	2,5	4	6
connecting capacity			
flexible (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 6	0,2 ÷ 10
rigid (mm <sup>2</sup> )	0,2 ÷ 4	0,2 ÷ 6	0,2 ÷ 10
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14	4 - WP40/16	6 - WP60/20
rated voltage / rated current / gauge conf. to IEC 60947-7-1	400 V / 16 A / A3	800 V / 32 A / A4	800 V / 41 A / A5
rated voltage / rated current / AWG UL	600 V / 24 A / 24-12 AWG	600 V / 30 A / 28-10 AWG	-
rated impulse withstand voltage / pollution degree	6 KV / 3	6 KV / 3	6 KV / 3
insulation stripping length (mm)	13	13	13
tightening torque value (test / max) (Nm)	-	6,2	8,2
height / width / thickness	37 / 66 / 5,2	45 / 86 / 6,2	48 / 97 / 8,2
height / width / thickness	45 / 66 / 5,2	53 / 86 / 6,2	56 / 97 / 8,2
height / width / thickness	-	-	-
		KEMA.KEUR pending	UL and cUL pending
<b>APPROVALS</b>			
<b>ACCESSORIES</b>	<b>Type</b>	<b>Type</b>	<b>Type</b>
End sections	<b>Cat. No.</b>	<b>Cat. No.</b>	<b>Cat. No.</b>
grey	HMT.2/1+2/PT/GR	HM511GR	HSCB.6/PT/GR
beige	-	-	HB201GR
blue	-	-	-
Permanent cross connection (intrinsically IPXXB protected once mounted)	PTC/03/02 poles	PTC0302	PTC/8/02 poles
	PTC/03/03 poles	PTC0303	PTC0803
	PTC/03/05 poles	PTC0305	PTC0805
	PTC/03/10 poles	PTC0310	PTC0810
	PTC/03/00 (47 poles)	PTC0300	PTC0800 (30 poles)
Rated current carrying capacity of jumper (A)	24	32	41
Cross-connection identification strip (100 mm)	-	PTC/SP	PTC0990
Diaframma separatore ponti	-	-	DFM/500
Internal cross connection	-	-	-
Coloured partition	DFH/2	DH02..	DFH/4
Test plug socket	-	-	DH04..
Test plug	SDD/1	DD001	-
Modular test plug	SDH/5	DH005	SDH/6
Numbering strip	CNU/8/51	NU0851	CNU/8/51
Conducting element	-	-	SH6/PT
End section for modular test plug	SH5/PT	DH501	-
Signal element	-	-	CCH/2,5-4
Screwdriver for the activation of the spring	CCH/2,5-4	CCH02	-
Screw and sleeve for short circuit plates (with socket)	-	-	CCH/6
Short-circuit plate	-	-	HB205
between 2 adjoining terminal blocks	-	-	HSCB/6/PO/2
between 4 adjoining terminal blocks	-	-	HB203
Marking tag	CNU/8/51	NU0851	HSCB/6/PO/4
printed or blank	BTU for PR/DIN and PR/3	BT005	HB204
End bracket	BTO	BT007	CNU/8/51
	BT/3 for PR/3 only	BT003	BTU for PR/DIN and PR/3
	-	-	BTO
	-	-	BT/3 for PR/3 only
	-	-	BT003
Mounting rail according to IEC 60715 Std.	PR/3/AC of steel	PR003	-
	PR/3/AS same with slots	PR005	PR/3/AC of steel
			PR003
			PR/3/AS same with slots
			PR005

# H Series


## with polyamide insulating body

- for blade fuse (acc. to DIN 72581/3F – ISO 8820) and Ø 5 x 20 mm fuses (fuses supplied separately)
- with possibility of cross connection
- mounting onto PR/3 type rails – according to IEC 60715 Std., “TH/35” type
- available in standard (grey RAL 7042 colour) or (Ex) “intrinsic safety” circuits (blue RAL 5015 colour) versions, where indicated



Please refer to the table on page 136 in order to determine the insulation voltage of the different PTC connection diagrams

(\*) value referred to the insulation characteristics of the terminal block

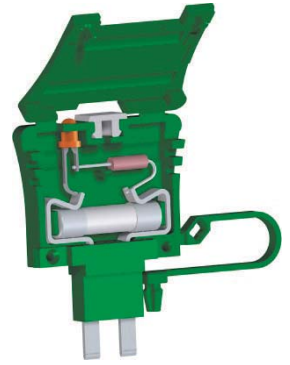


The /GR tag indicates the grey colour version.

Max. dissipated power – In conf. with IEC 60947-7-3						
Terminal block	Voltage [V] (*)	Current [A]	Protection against overload and short circuit		Only protection against short circuit	
			Single configuration (PV) - [W]	Composite configuration (PV) - [W]	Single configuration (PV) - [W]	Composite configuration (PV) - [W]
MPFA.4 + CPF/5	250	6,3	1,6	1,6	4	1,6
DSFA.4 + CPF/5	250	6,3	1,6	1,6	4	1,6
HMFA.2 + CPF/5	250	6,3	1,6	1,6	4	1,6

grey version	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section (mm²)	
connecting capacity	
flexible (mm²)	
rigid (mm²)	
max. flexible with ferrule (mm²)-ferrule type	
rated voltage / rated current / gauge conf. to IEC 60947-7-1	
rated voltage / rated current / AWG	UL
(Ex e) rated voltage  /  (V)	
rated impulse withstand voltage / pollution degree	
insulation stripping length (mm)	
tightening torque value (test / max) (Nm)	
height / width / thickness  TH/35 7,5 mm	
height / width / thickness  TH/35 15 mm	
height / width / thickness  G32	

HMFA.2/GR	
Cat. No.	HF300GR
function / type	for blade fuse and component-holder cartridge
rated cross-section (mm²)	2,5
connecting capacity	
flexible (mm²)	0,2 ÷ 4
rigid (mm²)	0,2 ÷ 4
max. flexible with ferrule (mm²)-ferrule type	2,5 - WP25/14
rated voltage / rated current / gauge conf. to IEC 60947-7-1	400 V (*) / 6,3 A / A3
rated voltage / rated current / AWG	-
(Ex e) rated voltage  /  (V)	-
rated impulse withstand voltage / pollution degree	4 kV (*) / 3
insulation stripping length (mm)	11
tightening torque value (test / max) (Nm)	-
height / width / thickness  TH/35 7,5 mm	41 / 66 / 5,2
height / width / thickness  TH/35 15 mm	49 / 66 / 5,2
height / width / thickness  G32	- / - / -

CPF/5	
Cat. No.	CPF05
function / type	component-holder cartridge
rated cross-section (mm²)	-
connecting capacity	-
flexible (mm²)	-
rigid (mm²)	-
max. flexible with ferrule (mm²)-ferrule type	-
rated voltage / rated current / gauge conf. to IEC 60947-7-1	320 V (a) / 6,3 A (a) / A5
rated voltage / rated current / AWG	-
(Ex e) rated voltage  /  (V)	-
rated impulse withstand voltage / pollution degree	4 kV / 3
insulation stripping length (mm)	-
tightening torque value (test / max) (Nm)	-
height / width / thickness  TH/35 7,5 mm	(b) / 33 / 6
height / width / thickness  TH/35 15 mm	(b) / 33 / 6
height / width / thickness  G32	(b) / 33 / 6

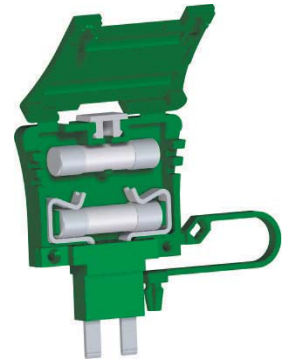

The cartridge can contain a spare fuse, instead of the LED signalling circuit.

### APPROVALS



ACCESSORIES	
End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper (A)	
Increased pitch jumper	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Blade fuses	In = 2 A acc. to DIN 72581/3F ISO 8820 In = 5 A - max voltage 32 V In = 7,5 A In = 15 A
Signal element	
Numbering strip	
Screwdriver for the activation of the spring	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
HMT.2/1+2/PT/GR	HM511GR
-	-
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
-	-
DFH/2	DH02..
-	-
SDD/1	DD001
SDH/5	DH005
SH5/PT	DH501
F32/2	FN03202
F32/5	FN03205
F32/7	FN03207
F32/15	FN03215
-	-
CNU/8/51	NU0851
CCH/2,5-4	CCH02
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	-
PR/3/AC of steel	PRO03
PR/3/AS same with slots	PRO05

ACCESSORIES		Type	Cat. No.
Marking tag	printed or blank	CNU/8/51	NU0851
Tinned brass conductor	Ø 5 x 20 mm	CO/5	VL103
Cartridge / insert with 1 A diode		SFR/11A (with 1 A diode)	SF992
Cartridge / insert with 3 A diode		SFR/13A (with 3 A diode)	SF993

OUTFITTED VERSIONS		Type	Cat. No.
With non-polarized LED microcircuit	12 Vdc / Vac	CPF/5L12	CPF512
With non-polarized LED microcircuit	24 Vdc / Vac	CPF/5L24	CPF524
With non-polarized LED microcircuit	48 Vdc / Vac	CPF/5L48	CPF548
With non-polarized LED microcircuit	115 Vdc / Vac	CPF/5L115	CPF511
With non-polarized LED microcircuit	230 Vdc / Vac	CPF/5L230	CPF523
With 1 A diode (1N4001 ÷ 1N4007 types)		CPF/5D1A	CPF501
With 3 A diode (BY255 type)		CPF/5D3A	CPF503
With resistor 1200 Ω (1 W ± 5%)		CPF/5R	CPR05

When the cartridge is mounted on HMFA 2 terminals, adjoining one another, a terminal strip must be envisaged between one terminal and the next, because of the pitch differential between terminal and cartridge.

Note:

- (a) with fuse Ø 5 x 20 mm, 250 V, I<sub>max</sub> = 6,3 A – with brass pin I<sub>max</sub> = 10 A
- (b) total value, when the cartridge is mounted on terminals, including the mounting rail

# H Series

## with polyamide insulating body

- for blade fuse (acc. to DIN 72581/3F – ISO 8820) and Ø 5 x 20 mm fuses (fuses supplied separately)
- with possibility of cross connection
- mounting onto PR/3 type rails – according to IEC 60715 Std., "TH/35" type
- available in standard (grey RAL 7042 colour) or (Ex) i "intrinsic safety" circuits (blue RAL 5015 colour) versions, where indicated



for Ø 5 x 20 mm fuse



for Ø 5 x 20 mm fuse

Possibility of the insertion of a LSH type indicator (for 12, 24, 48, 115 or 230 V), supplied also separately, equipped with a red coloured LED. The blow-out of the fuse determines the ignition of the LED, with a current flow of approximately 2 mA in a.c. or 5 mA in d.c.

(\*) value referred to the insulation characteristics of the terminal block

(\*\*) separate configuration conf. to IEC 60947-7-3

The /GR tag indicates the grey colour version.

### grey version

TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS

#### ACCESSORIES

End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Jumper with increased pitch	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Blade fuses	In = 2 A In = 5 A
acc. to DIN 72581/3F ISO 8820	In = 7,5 A In = 15 A
- max voltage 32 V	
Signal element	
Numbering strip	
Screwdriver for the activation of the spring	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

### HMF.4/GR

Cat. No. HF110GR

for Ø 5 x 20 mm fuse	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
630 V (*) / 6,3 A (20 A con CO/5) / A4	
600 V / 20 A / 24-10 AWG	
-	
6 KV / 3	
13	
-	
68 / 80 / 8	
76 / 80 / 8	
- / - / -	



Type	Cat. No.
HMF/PT/GR	HF111GR
-	-
PH/2,5-4	PH100
32	
PHM/2,5-4	PHM01
-	-
DFH/4	DH04..
-	-
SDD/1	DD001
-	-
-	-
-	-
-	-
-	-
-	-
-	-
LSH/** (according to voltage)	LS...
CNU/8/51	NU0851
CCH/2,5-4	CCH02
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT0	BT007
BT/3 for PR/3 only	BT003
-	-
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

### HMF.4/L12/GR

Cat. No. HF212GR

### HMF.4/L24/GR

Cat. No. HF224GR

### HMF.4/L48/GR

Cat. No. HF248GR

for fuse and LED circuit	
4	
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
630 V (*) / 6,3 A (20 A con CO/5) / A4	
-	
6 KV / 3	
13	
-	
68 / 80 / 8	
76 / 80 / 8	
- / - / -	


Approvals referred to standard version

Type	Cat. No.
-	-
-	-
PH/2,5-4	PH100
32	
PHM/2,5-4	PHM01
-	-
DFH/4	DH04..
-	-
SDD/1	DD001
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
CNU/8/51	NU0851
CCH/2,5-4	CCH02
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT0	BT007
BT/3 for PR/3 only	BT003
-	-
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

# H Series

## with polyamide insulating body

- mounting onto PR/3, TH/35 type rails, according to IEC 60715 Std.
- for  $\varnothing 5 \times 20$  mm fuses or  $\varnothing 6,3 \times 32$  mm fuses (supplied separately) with possibility to detect the fuse-blowout status, by means of a LED micro-circuit (CIL...)
- available in grey (RAL 7042) colour
- "Easy bridge" jumpering system: double insertion possibility of PTC multi-pole cross-connections, without the need of an insulating protection
- coupling possibility with all HMM.4...terminal blocks

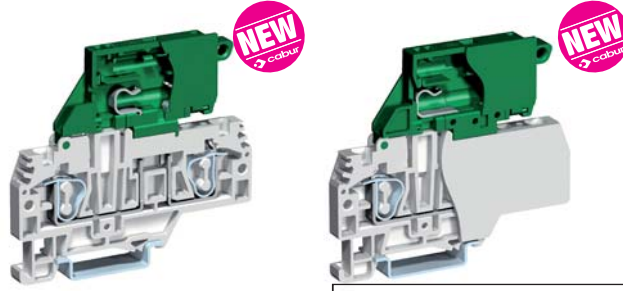

PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING

Tensione di isolamento nelle suddette configurazioni (V) sec. IEC 60947-7-1					
500	500		500 (*)	500	500

The /GR tag indicates the grey colour version.

grey version	
CARATTERISTICHE TECNICHE	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32
altezza / larghezza / spessore	G32

### APPROVALS

ACCESSORIES	
End sections	grey beige
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross connection identification strip (100 mm)	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Spina di derivazione	
Fusibile miniatura	$\varnothing 5 \times 20$ mm
Elemento conduttore	$\varnothing 5 \times 20$ mm
Lampada al neon	$\varnothing 6 \times 26$ mm
LED circuit composed by:	
- 2 contacts	
- 1 micro-circuit	
- 1 transparent cover	
Terminal block with LED 12 ÷ 48 V non polarised micro-circuit	
Terminal block with LED 115 ÷ 230 V non polarised micro-circuit	
Numbering strip	
Screwdriver for the activation of the spring	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

HFR.4/M/GR	Cat. No. HF310GR
$\varnothing 5 \times 20$ mm fuse-holder	4
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
500 V / 6,3 A (10 A con CO/5) / A4	
-	
4 kV / 3	
13	
-	
70 / 78 / 6,2	
78 / 78 / 6,2	
- / - / -	

KEMA-KEUR, UL pending

HFR.4/GR	Cat. No. HF210GR
$\varnothing 6,3 \times 32$ mm fuse-holder	4
0,2 ÷ 6	
0,2 ÷ 6	
4 - WP40/16	
500 V / 10 A / A4	
-	
4 kV / 3	
13	
-	
70 / 78 / 8,2	
78 / 78 / 8,2	
- / - / -	

KEMA-KEUR, UL pending

(\*): Only for the connection of max. two adjacent terminal blocks  
It is possible to cross-connect terminal block HFR.4/M/GR also with types HMM.4/... positioned immediately adjacent

Type	Cat. No.
HFR.4/PT/GR	HF211GR
-	
PTC/5/02 poli	PTC0502
PTC/5/03 poli	PTC0503
PTC/5/05 poli	PTC0505
PTC/5/10 poli	PTC0510
PTC/5/00 (40 poli)	PTC0500
32	
PTC/SP	PTC0990
-	
DFH/4	DH04..
SDD/1	DD001
F5/...	FN...
CO/5	VL103
CIL/HFR/M/12-48	HF518M
CIL/HFR/M/115-230	HF510M
HFR.4/M/GR/C12-48	HF918MGR
HFR.4/M/GR/C115-230	HF910MGR
CNU/8/61	NU0861
CCH/2,5-4	CCH02
CNU/8/51	NU0851
-	
BTU per PR/DIN e PR/3	BT005
BTO	BT007
BT/3 solo per PR/3	BT003
-	
PR/3/AC in acciaio	PR003
PR/3/AS idem con asole	PR005

Type	Cat. No.
HFR.4/PT/GR	HF211GR
-	
PTC/5/02 poli (*)	PTC0502
32	
PTC/SP	PTC0990
-	
-	
SDD/1	DD001
-	
-	
LSN	FL202
CIL/HFR/M/12-48	HF518
CIL/HFR/M/115-230	HF510
HFR.4/GR/C12-48	HF918GR
HFR.4/GR/C115-230	HF910GR
CCH/2,5-4	CCH02
-	
-	
BTU per PR/DIN e PR/3	BT005
BTO	BT007
BT/3 solo per PR/3	BT003
-	
PR/3/AC in acciaio	PR003
PR/3/AS idem con asole	PR005

# H Series

## with polyamide insulating body

- for 5.08 mm pitch female connectors - on two levels
- mounting onto PR/3 type rails – according to IEC 60715 Std., “TH/35” type
- double possibility to house PTC – “easy bridge” multi-pole cross connection, on each level
- available in standard (grey RAL 7042 colour) or (Ex) i “intrinsic safety” circuits (blue RAL 5015 colour) versions, where indicated



PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING
Insulation voltage in the above configurations (V)					
320	320		320	320	320

The /GR tag indicates the grey colour version.

grey version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section (mm <sup>2</sup> )	
connecting capacity	
flexible (mm <sup>2</sup> )	
rigid (mm <sup>2</sup> )	
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge conf. to IEC 60947-7-1	
rated voltage / rated current / AWG	UL
(Ex e) rated voltage  /  (V)	
rated impulse withstand voltage / pollution degree	
insulation stripping length (mm)	
tightening torque value (test / max) (Nm)	
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32
APPROVALS	
ACCESSORIES	
End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper (A)	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Lug protection cover	10 poles
Numbering strip	
Screwdriver for the activation of the spring	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

<b>HCD.1/GR</b>	Cat. No. <b>HC200GR</b>
<b>HCD.1 (Ex)i</b>	Cat. No. <b>HC210</b>
2 level feed-through with 2 screw connections and 2 pins for connectors 1,5	
0,2 ÷ 2,5	
0,2 ÷ 2,5	
1,5 - WP15/14	
320 V / 12 A / B2	
300 V / 12 A / 26-14 AWG	
-	
6 KV / 3	
10	
-	
59 / 72 / 5,08	
67 / 72 / 5,08	
- / - / -	



Type	Cat. No.
<b>HCD.1/PT/GR</b>	HC201GR
-	
<b>HCD.1/PT(Ex)i</b>	HC211
<b>PTC/2/02</b> poles	PTC0202
<b>PTC/2/03</b> poles	PTC0203
<b>PTC/2/05</b> poles	PTC0205
<b>PTC/2/10</b> poles	PTC0210
<b>PTC/2/00</b> (50 poles)	PTC0200
<b>24</b>	
-	
<b>DFU/7</b>	DU07..
<b>DFM/500</b>	DF500
-	
-	
-	
<b>VPC/VT</b>	VP102
<b>CNU/8/51</b>	NU0851
<b>CCH/2,5-4</b>	CCH02
<b>CNU/8/51</b>	NU0851
<b>BT0</b>	BT007
-	
<b>BT/3</b> for PR/3 only	BT003
-	
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

detail of PTC jumper with DFM/500 barriers, SNZ/508 numbering strips and VPC/VT lug protection covers



detail with 5.08 mm female connectors inserted on the two levels and the lug protection covers raised



Female connectors, 90° - 5.08 mm pitch and with a number of poles from 2 to 16, are available. The connector can be easily inserted until it reaches its blocking position, guaranteeing optimum connection onto the male contact. In such a position the connector is hooked onto the insulating body of the terminal block by means of a tooth, of which it is equipped.


<b>VPC/F02</b> - 2 poles	Cat. No. <b>VP902</b>
<b>VPC/F03</b> - 3 poles	Cat. No. <b>VP903</b>
<b>VPC/F04</b> - 4 poles	Cat. No. <b>VP904</b>
<b>VPC/F05</b> - 5 poles	Cat. No. <b>VP905</b>
<b>VPC/F06</b> - 6 poles	Cat. No. <b>VP906</b>
<b>VPC/F07</b> - 7 poles	Cat. No. <b>VP907</b>
<b>VPC/F08</b> - 8 poles	Cat. No. <b>VP908</b>
<b>VPC/F09</b> - 9 poles	Cat. No. <b>VP909</b>
<b>VPC/F10</b> - 10 poles	Cat. No. <b>VP910</b>
<b>VPC/F11</b> - 11 poles	Cat. No. <b>VP911</b>
<b>VPC/F12</b> - 12 poles	Cat. No. <b>VP912</b>
<b>VPC/F13</b> - 13 poles	Cat. No. <b>VP913</b>
<b>VPC/F14</b> - 14 poles	Cat. No. <b>VP914</b>
<b>VPC/F15</b> - 15 poles	Cat. No. <b>VP915</b>
<b>VPC/F16</b> - 16 poles	Cat. No. <b>VP916</b>



# H Series

## with polyamide insulating body

- spring system with connector plug (patented)
- Easy Bridge cross connection system (patented)
- available in grey RAL 7042 colour

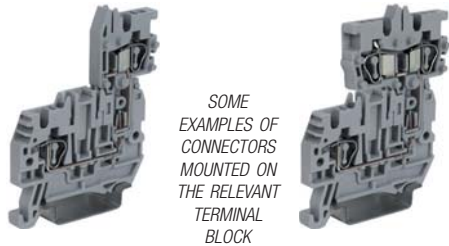

PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING

Terminal block	Jumper	Insulation voltage in the above configurations (V) acc. to IEC 60947-7-1				
HVPC.2/GR	PTC/03	500	500	500 (*)	500	500
CHP2(D)/GR	PTC/03	500 (630)	500	400 (*)	-	-

The /GR tag indicates the grey colour version.

(\*) with end plate interposed also on the connector (\*\*) dimensions with inserted connector

grey version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

HVPC.2/GR	
Cat. No. HVP300GR	
spring type for connectors	2,5
flexible	0,2 ÷ 4
rigid	0,2 ÷ 4
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14
rated voltage / rated current / gauge	800 V / 24 A / A3
rated voltage / rated current / AWG	-
(Ex e) rated voltage	-
rated impulse withstand voltage / pollution degree	8 KV / 3
insulation stripping length	13
tightening torque value (test / max)	-
height / width / thickness	41 / 50 / 5,2
height / width / thickness	49 / 50 / 5,2
height / width / thickness	- / - / -

CHP.2/GR	
Cat. No. HVP900GR	
female connector for one conductor	2,5
flexible	0,2 ÷ 4
rigid	0,2 ÷ 4
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14
rated voltage / rated current / gauge	500 V / 24 A / A3
rated voltage / rated current / AWG	-
(Ex e) rated voltage	-
rated impulse withstand voltage / pollution degree	8 KV / 3
insulation stripping length	13
tightening torque value (test / max)	-
height / width / thickness	67 (**) / 58 (**) / 5,2
height / width / thickness	75 (**) / 58 (**) / 5,2
height / width / thickness	-

CHP.2D/GR	
Cat. No. HVP910GR	
female connector for two conductors	2,5
flexible	0,2 ÷ 4
rigid	0,2 ÷ 4
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	2,5 - WP25/14
rated voltage / rated current / gauge	500 V / 24 A / A3
rated voltage / rated current / AWG	-
(Ex e) rated voltage	-
rated impulse withstand voltage / pollution degree	8 KV / 3
insulation stripping length	13
tightening torque value (test / max)	-
height / width / thickness	67 (**) / 58 (**) / 5,2
height / width / thickness	75 (**) / 58 (**) / 5,2
height / width / thickness	-

### APPROVALS



UL and cUL pending



UL and cUL pending



UL and cUL pending

ACCESSORIES	
End sections	grey blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross connection identification strip (100 mm)	green
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Lug protection cover	10 poles
Numbering strip	
Screwdriver for the activation of the spring	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
HVPC.2/PT/GR	HVP301GR
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
PTC/SP	PTC0990
-	-
DFH/1	DH01..
-	-
SDD/1	DD001
SDH/5	DH005
SH5/PT	DH501
-	-
CNU/8/51	NU0851
CCH/2,5-4	CCH02
CNU/8/51	NU0851
-	-
BTU for PR/DIN and PR/3	BT005
BTO	BT007
BT/3 for PR/3 only	BT003
-	-
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005


Type	Cat. No.
CHP2/PT/GR	HVP901GR
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
PTC/SP	PTC0990
-	-
DFH/1	DH01..
-	-
SDD/1	DD001
SDH/5	DH005
SH5/PT	DH501
-	-
CNU/8/51	NU0851
CCH/2,5-4	CCH02
CNU/8/51	NU0851
-	-
-	-
-	-

Type	Cat. No.
CHP.2D/PT/GR	HVP911GR
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
PTC/SP	PTC0990
-	-
DFH/1	DH01..
-	-
SDD/1	DD001
SDH/5	DH005
SH5/PT	DH501
-	-
CNU/8/51	NU0851
CCH/2,5-4	CCH02
CNU/8/51	NU0851
-	-
-	-
-	-

# H Series

## with polyamide insulating body

- spring system with connector plug for earth connections (patented)
- Easy Bridge cross connection system (patented)

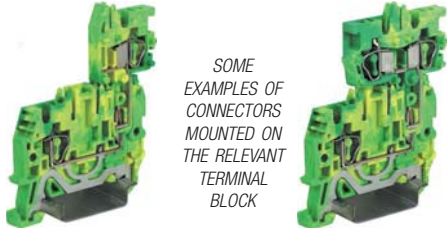

SOME  
EXAMPLES OF  
CONNECTORS  
MOUNTED ON  
THE RELEVANT  
TERMINAL  
BLOCK



(\*\*) dimensions with inserted connector

yellow/green version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
(Ex e) rated voltage  /	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS

ACCESSORIES	
End sections	yellow/green
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Lug protection cover	10 poles
Numbering strip	
Screwdriver for the activation of the spring	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

HVTE.2	Cat. No.	HVT500
earth spring type for connectors		
2,5		
0,2 ÷ 4		
0,2 ÷ 4		
2,5 - WP25/14		
- / - / A3		
8 KV / 3		
13		
-		
41 / 50 / 5,2		
49 / 50 / 5,2		
- / - / -		



UL and cUL pending

Type	Cat. No.
HVPC.2/PT/GR	HVP301GR
-	
<b>24</b>	
PTC/SP	PTC0990
-	
DFH/1	DH01..
-	
SDD/1	DD001
-	
-	
-	
CNU/8/51	NU0851
CCH/2,5-4	CCH02
CNU/8/51	NU0851
-	
BTU for PR/DIN and PR/3	BT005
BT0	BT007
BT/3 for PR/3 only	BT003
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

CHTE.2	Cat. No.	HVT900
female connector for one conductor		
2,5		
0,2 ÷ 4		
0,2 ÷ 4		
2,5 - WP25/14		
- / - / A3		
8 KV / 3		
13		
-		
67 (**)/ 58 (**)/ 5,2		
75 (**)/ 58 (**)/ 5,2		
-		



UL and cUL pending

Type	Cat. No.
CHP.2/PT/GR	HVP301GR
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
<b>24</b>	
PTC/SP	PTC0990
-	
DFH/1	DH01..
-	
SDD/1	DD001
SDH/5	DH005
SH5/PT	DH501
-	
CNU/8/51	NU0851
CCH/2,5-4	CCH02
CNU/8/51	NU0851
-	
-	
-	
-	

CHTE.2D	Cat. No.	HVT910
female connector for two conductors		
2,5		
0,2 ÷ 4		
0,2 ÷ 4		
2,5 - WP25/14		
- / - / A3		
8 KV / 3		
13		
-		
67 (**)/ 58 (**)/ 5,2		
75 (**)/ 58 (**)/ 5,2		
-		



UL and cUL pending

Type	Cat. No.
CHP.2D/PT/GR	HVP911GR
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
<b>24</b>	
PTC/SP	PTC0990
-	
DFH/1	DH01..
-	
SDD/1	DD001
SDH/5	DH005
SH5/PT	DH501
-	
CNU/8/51	NU0851
CCH/2,5-4	CCH02
CNU/8/51	NU0851
-	
-	
-	
-	

# H Series

## Mini terminal blocks with polyamide insulating body

- UL94V-0
- mounting onto PR/2 type rails, TH/15 type
- available in standard (grey RAL 7035 colour) or (Ex)i “intrinsic safety” circuits (blue RAL 5015 colour) versions, where indicated



Modular test plug



PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING
Insulation voltage in the above configurations (V)					
400	400		800 (PT)	500	400

The /GR tag indicates the grey colour version.

grey version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/15 5,5 mm

HPP.2/GR	Cat. No. HP170GR
HPP.2 (Ex)i	Cat. No. HI132
feed-through	
2,5	
0,2 ÷ 4	
0,2 ÷ 4	
2,5 - WP25/14	
800 V / 24 A / A3	
600 V / 24 A / 24-12 AWG	
(*)	
8 KV / 3	
13	
-	
35 / 36 / 5,2	

HP.2/GR	Cat. No. HP150GR
HP.2 (Ex)i	Cat. No. HI130
feed-through	
2,5	
0,2 ÷ 4	
0,2 ÷ 4	
2,5 - WP25/14	
800 V / 24 A / A3	
600 V / 24 A / 24-12 AWG	
(*)	
8 KV / 3	
13	
-	
30 / 36 / 5,2	

In electrical panels where the space is particularly limited but there is nevertheless the requirement of high cable connection density, Cabur offers, also in spring-clamp technology, a series of mini terminal blocks suited for the connection of conductors up to 4 mm<sup>2</sup>.

The range consists of three versions, for panel mount (by means of screw or clip) and for the IEC 60715, 15 mm PR/2 rail mount.

The particular configuration of the insulating body of the three types of terminal blocks allows the perfect matching between anyone of them, even of different versions, in order to guarantee maximum flexibility.

### APPROVALS



ACCESSORIES	
End sections	grey blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross connection identification strip (100 mm)	green
Coloured partition	red, green, white
Numbering strip	
Screwdriver for the activation of the spring	
Modular test plug	
End section for modular test plug	
Test plug	
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
HP/PT/GR	HP101GR
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
PTC/SP	PTC0990
DFF/2	DFF2..
SHZ/2	SH001
CCH/2,5-4	CCH02
SDH/5	DH005
SH5/PT	DH501
SDD/1	DD001
BT/2 for PR/2 only	BT006
-	
-	
-	
PR/2/AC of steel	PR009
PR/2/AS same with slots	PR010

Type	Cat. No.
HPV/PT/GR	HV111GR
-	
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
24	
PTC/SP	PTC0990
DFF/2	DFF2..
SHZ/2	SH001
CCH/2,5-4	CCH02
SDH/5	DH005
SH5/PT	DH501
SDD/1	DD001
BT/2 for PR/2 only	BT006
-	
-	
-	

**SUGGESTED COMPOSITION:** for the mounting of terminal boards formed by terminal blocks type **HPP.2/GR** it is highly recommended to use together **HP.2/GR** and **HPP.2/GR** in a 4 to 1 ratio. Whenever there is the need to dismount the terminal board assembled in such a way, it is recommended to separate each group composed by a **HPP.2/GR** and dismount them one at a time, with the aid of an appropriate screwdriver (CCH/2,5-4) and acting in the appropriate slots of the insulating wall of the terminal blocks

# HPC Series

## with polyamide insulating body

- UL94V-0
- panel mount by means of clips
- panel thickness 0,6 ÷ 1,2 mm
- fixing hole Ø 3,5 mm
- available in standard (grey RAL 7042 colour) or (Ex) i “intrinsic safety” circuits (blue RAL 5015 colour) versions, where indicated



Modular test plug



PTC jumper configurations					
SINGLE OR PARALLEL EXTENDING	POLE SKIPPING	ADJACENT WITHOUT BARRIER	ADJACENT WITH BARRIER	STAGGERED MODE	PARALLEL SKIPPING
Insulation voltage in the above configurations (V)					
400	400		800 (PT)	400	400

The **/GR** tag indicates the grey colour version.

<b>grey version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/15 5,5 mm

<b>HPC.2/GR</b>	Cat. No. <b>HP160GR</b>
<b>HPC.2 (Ex)i</b>	Cat. No. <b>HI131</b>
passante	2,5
	0,2 ÷ 4
	0,2 ÷ 4
	2,5 - WP25/14
	800 V / 24 A / A3
	600 V / 24 A / 24-12 AWG
	(*)
	8 KV / 3
	13
	-
	30 / 36 / 5,2

In electrical panels where the space is particularly limited but there is nevertheless the requirement of high cable connection density, Cabur offers, also in spring-clamp technology, a series of mini terminal blocks suited for the connection of conductors up to 4 mm<sup>2</sup>.

The range consists of three versions, for panel mount (by means of screw or clip) and for the IEC 60715, 15 mm PR/2 rail mount.

The particular configuration of the insulating body of the three types of terminal blocks allows the perfect matching between anyone of them, even of different versions, in order to guarantee maximum flexibility.

### APPROVALS



<b>ACCESSORIES</b>	
End sections	grey blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Cross connection identification strip (100 mm)	green
Coloured partition	red, green, white
Numbering strip	
Screwdriver for the activation of the spring	
Modular test plug	
End section for modular test plug	
Test plug	
End bracket	
Mounting rail according to IEC 60715 Std.	





Type	Cat. No.
HPV/PT/GR	HV111GR
-	
PTC/03/02 poles	PTC0302
PTC/03/03 poles	PTC0303
PTC/03/05 poles	PTC0305
PTC/03/10 poles	PTC0310
PTC/03/00 (47 poles)	PTC0300
<b>24</b>	
PTC/SP	PTC0990
DFF/2	DH02..
SHZ/2	SH001
CCH/2,5-4	CCH02
SDH/5	DH005
SH5/PT	DH501
SDD/1	DD001
BT/2 for PR/2 only	BT006
-	
-	
-	
PR/2/AC of steel	PR009
PR/2/AS same with slots	PR010

# Insulation displacement terminal blocks

**NCS** terminal block is an excellent solution for the quick and safe connection of conductors having small cross-section. This system in fact minimises connection time as neither preparing the conductor nor tightening the screws is necessary. All that needs to be done is to trim the conductor and, unlike what happens in other types of connection that require an appropriate insulation stripping, introduce the end of the wire in the upper part of the conductor insertion hole. At this point the simple action, performed by the operator's fingers or with the aid of a screwdriver, of applying pressure on the tapper, guides the conductor through a fork in the conducting body, with a resulting cut in the insulation and thus creating electrical contact.

In operational position, the conductor is placed in the lower part of its introduction hole. What needs to be pointed out is that the described connection can either be performed without any tool or simply with the aid of a normal screwdriver, always at hand for any operator.

The metallic part, which covers both the functions of conducting body and wire connections, is made in a special copper alloy; it ensures the best resistance to every aggressive agent and, thanks to its own elasticity, a high number of operations (more than 50), always guaranteeing reliable electrical contacts. The particular shape and angle of the fork, suited for the displacement of the insulation and to the contact, further avoids the conductor from accidentally slipping out of place. It is equally simple to remove the conductor from the terminal block: once again, with the use of a screwdriver (please refer to the image) it is possible to lift the tapper which, in its lower part, is shaped in a way as to pull the conductor out of the contact area with the fork, freeing it for the extraction. Once extracted, if the conductor must be re-connected, it must be trimmed and the above described procedure must be repeated once again.

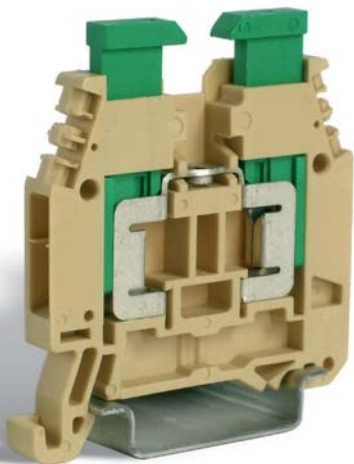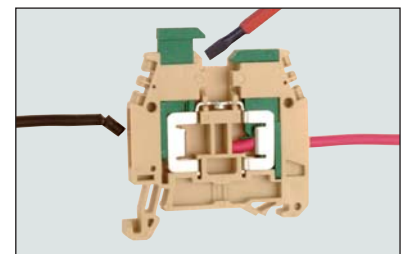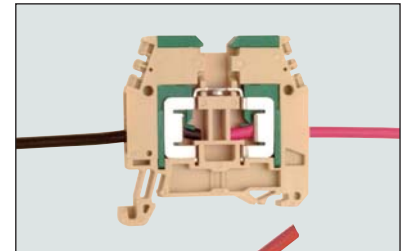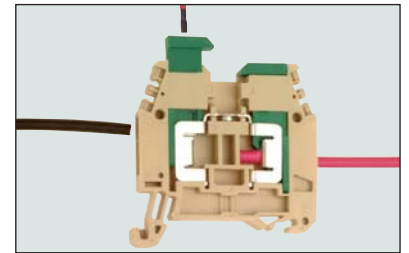

**Note:**

alongside the NCS terminal block, the NCV version is also available: this version offers on one side the I.D.C. (Insulation Displacement Connection), and on the other the traditional screw-clamp connection. Such solution can become particularly useful in case of "field" needs of larger conductors (up to a maximum of 6 mm<sup>2</sup>) or where is nevertheless requested to guarantee to the end user the use of screw-clamp connection.

# NCS/V Series

## with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type



beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

NCS	Cat. No.	NC100
feed-through		
		1,5
		0,5 ÷ 1,5
		0,5 ÷ 1
		-
		800 V / 15 A / -
		600 V / 15 A / 20-16 AWG
		8 KV / 3
		-
		47 (53 with taper raised) / 48 / 6,2
		53 (61 with taper raised) / 48 / 6,2
		-

NCV	Cat. No.	NC200
version with 1 screw connection		
		4 / 1,5
		0,2 ÷ 6 / 0,5 ÷ 1,5
		0,2 ÷ 6 / 0,5 ÷ 1
		4 - WP40/16 (screw connection side)
		800 V / 15 A / A4
		600 V / 15 A / 20-16 AWG / 8,9 lb.in.
		8 KV / 3
		-
		47 (53 with taper raised) / 48 / 6,2
		53 (61 with taper raised) / 48 / 6,2
		-

### APPROVALS



ACCESSORIES	
End sections	grey beige blue
Permanent cross connection (intrinsically IPXXB protected once mounted)	
Rated current carrying capacity of jumper	(A)
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Numbering strip	
Screwdriver for the activation of the spring	
Warning plate	on adjacent terminal blocks
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
-	
<b>NCS/PT</b>	NC101
-	
<b>POF/99</b>	POF99
-	
<b>24</b>	
<b>PMP/02</b>	PMP02
<b>CPM/99</b>	CPM99
<b>DFU/02</b>	DU02..
-	
-	
-	
<b>SHZ/60</b>	SH007
-	
-	
<b>CNU/8/51</b>	NU0851
<b>CSC</b>	CS...
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b>	BT007
<b>BT/3</b> for PR/3 only	BT003
-	
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
-	
<b>NCS/PT</b>	NC101
-	
<b>POF/99</b>	POF99
-	
<b>24</b>	
<b>PMP/02</b>	PMP02
<b>CPM/99</b>	CPM99
<b>DFU/02</b>	DU02..
-	
-	
-	
<b>SHZ/60</b>	SH007
-	
-	
<b>CNU/8/51</b>	NU0851
<b>CSC</b>	CS...
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BTO</b>	BT007
<b>BT/3</b> for PR/3 only	BT003
-	
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

# Screw-clamp terminal blocks



## Melamine insulated

### Feed-through and high current terminal blocks

EDM series .....	pages 98-101
SV series .....	pages 102-104

### Terminal blocks for test and measurement circuits

SCX.10 series .....	pages 105-107
---------------------	---------------

### Fuse-holder and diode-holder terminal blocks

SFC.10 - SFL.10 - FLD.10/F5 .....	page 108
FLD.10/F6 - FLD.10/F5L - FLD.10/D .....	page 109
VLM.10 - VLM.10/O - VL.16 .....	page 110
VL.16/O - VL.16/O-R - VL.16/O-M .....	page 111

### Terminal blocks for thermocouples circuits


TC/DIN .....	page 112
--------------	----------

### High current terminal blocks

CDA series .....	pages 113-118
------------------	---------------

# EDM Series feed-through terminal blocks

with UL94V-0 (5V) melamine  
insulating body

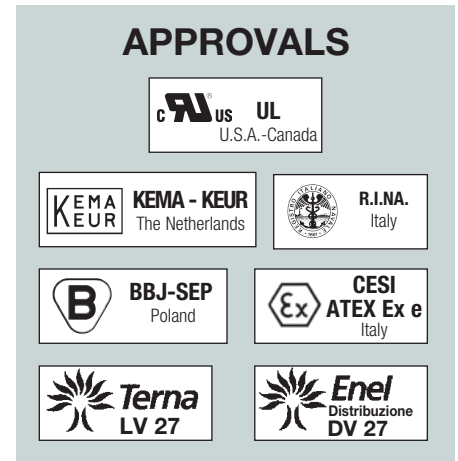

**E**DM terminal blocks represent the basic series in melamine produced by Cabur, having feed-through function. The whole series consists of eight types, with the following rated cross-sections in mm<sup>2</sup>.

**2,5 4 6 10 16 25 35 70**

**connection type:** screw, on both sides, indirect and anti-loosening in response to pressure-plate action. The tightening screws are only accessible using a special screwdriver, and the special shape of the screw-heads make them impossible to lose. The screw tightening system offers the best guarantee of mechanical retention and efficiency under current, and is suitable for the connection of conductors of all cross-sections, with or without special preparation. The actions of tightening and loosening are extremely simple and can be carried out with tools such as screwdrivers, which are always at hand; it is important in any case to use screwdrivers of suitable dimensions and characteristics, in order to avoid damaging the screws or the insulating body.

**conducting body:** tube type, entirely in copper-zinc alloy with nickel-plating; the characteristics of the material used and the production method are such as to avoid the phenomenon of "seasoning cracking".

**tightening reliability:** suitable orthogonal grooves on the bottom of the conducting body and on the lower surface of the pressure plates ensure perfect electrical contact with the conductors and an efficient mechanical clamp. The grip is made particularly efficient by the elastic function accomplished by the pressure plate, which, in actual fact, under the pressing action of the screw, tends to bend, thus exerting an applied reaction to the head of the screw itself, which resists loosening, even in cases of dynamic stress.

**ease of insertion:** the insertion of the conductor in the terminal block is eased by:

- sloping entrance planes
- the rounded edges of the pressure plate
- the ample size of the entrance hole relative to the diameter of the maximum allowed conductor.

**other functions:** as well as their main function as feed-through terminal blocks, EDM terminal blocks are designed and manufactured in such a way as to carry out other functions. Indeed, through a threaded hole in the upper part of the conducting body, it is possible to:

- create a cross connection, either permanent or switchable, between two adjoining terminal blocks (the partition in the insulating body can be easily removed)
- create a multiple commoning bar connection between different terminal blocks
- insert a test plug socket

**marking:** all EDM terminal blocks offer the possibility of marking, on either side, using different Cabur systems (see accessories section, numbers CNU/8, SNZ and CSC).

**mounting:** the melamine terminal blocks in the EDM series are designed to be mounted on PR/DIN mounting rails, which conform to IEC 60715, "G32" type.



# EDM Series

with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- **CESI 03 ATEX 072 U** Ex e certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +115 °C
- when rail assemblies are to be manufactured for explosive environments (Ex e), please see page A14
- available in standard (beige RAL 1001 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions



beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32
APPROVALS	
ACCESSORIES	
End sections	beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

EDM.2	Cat. No.	ED110
EDM.2 (Ex)i	Cat. No.	EI110
TECHNICAL CHARACTERISTICS		
feed-through		
2,5		
0,5 ÷ 4		
0,5 ÷ 4		
2,5 - WP25/14		
800 V / 24 A / A3		
600 V / 20 A / 20 ÷ 12 AWG / 5,5 lb.in		
500		
8 KV / 3		
13		
0,4 / 0,8		
-		
52 / 36 / 5,5		
Type	Cat. No.	
EDM/2/PT	ED111	
EDM/2/PT (Ex)i	EI111	
PM/20/2 poles	PM202	
PM/20/3 poles	PM203	
PM/20/5 poles	PM205	
PM/20/10 poles	PM210	
24		
POS/11	POS11	
PMP/01	PMP01	
CPM/21 (CPX/21)	CPM21 (CPX21)	
DFU/1	DU01..	
PSD/D	PD004	
SDD/1	DD001	
-		
-		
-		
TUM/01 on 4	TQM02	
-		
PRP/6	PRP06	
CNU/8/51	NU0851	
CSC (with ADR adapter)	CS...	
BTU for PR/DIN and PR/3	BT005	
BT/DIN/PO for PR/DIN only	BT001	
-		
PR/DIN/AC of steel	PR001	
PR/DIN/AS same with slots	PR004	
PR/DIN/AL of aluminium	PR002	
-		
-		

EDM.4	Cat. No.	ED210
EDM.4 (Ex)i	Cat. No.	EI210
TECHNICAL CHARACTERISTICS		
feed-through		
4		
0,5 ÷ 6		
0,5 ÷ 6		
4 - WP40/16		
800 V / 32 A / A4		
600 V / 30 A / 20 ÷ 10 AWG / 8,9 lb.in		
500		
8 KV / 3		
14		
0,5 / 1,2		
-		
57 / 42 / 6,5		
Type	Cat. No.	
EDM/4-10/PT	ED401	
EDM/4-10/PT (Ex)i	EI401	
PM/40/2 poles	PM402	
PM/40/3 poles	PM403	
PM/40/5 poles	PM405	
PM/40/10 poles	PM400	
32		
POS/42	POS42	
PMP/42	PMP42	
CPM/12 (CPX/12)	CPM12 (CPX12)	
DFU/4	DU04..	
-		
PSD/A	PD001	
SDD/1	DD001	
-		
-		
-		
TTM/12 on 3 and on 4	TTM12	
-		
PRP/6	PRP06	
CNU/8/51	NU0851	
CSC (with ADR adapter)	CS...	
BTU for PR/DIN and PR/3	BT005	
BT/DIN/PO for PR/DIN only	BT001	
-		
PR/DIN/AC of steel	PR001	
PR/DIN/AS same with slots	PR004	
PR/DIN/AL of aluminium	PR002	
-		
-		

EDM.6	Cat. No.	ED310
EDM.6 (Ex)i	Cat. No.	EI310
TECHNICAL CHARACTERISTICS		
feed-through		
70		
0,5 ÷ 10		
0,51 ÷ 10		
6 - WP60/20		
800 V / 41 A / A5		
600 V / 50 A / 20 - 8 AWG / 13,3 lb.in		
500		
8 KV / 3		
14		
0,8 / 1,4		
-		
57 / 42 / 8		
Type	Cat. No.	
EDM/4-10/PT	ED401	
EDM/4-10/PT (Ex)i	EI401	
PM/60/2 poles	PM602	
PM/60/3 poles	PM603	
PM/60/5 poles	PM605	
PM/60/10 poles	PM610	
41		
POS/93	POS93	
PMP/13	PMP13	
CPM/83 (CPX/83)	CPM83 (CPX83)	
DFU/4	DU04..	
-		
PSD/N	PD013	
SDD/1	DD001	
-		
-		
-		
TTM/15 on 3	TTM12	
TQM/15 on 4	TQM15	
PRP/7	PRP07	
CNU/8/51	NU0851	
CSC (with ADR adapter)	CS...	
BTU for PR/DIN and PR/3	BT005	
BT/DIN/PO for PR/DIN only	BT001	
-		
PR/DIN/AC of steel	PR001	
PR/DIN/AS same with slots	PR004	
PR/DIN/AL of aluminium	PR002	
-		
-		

# EDM Series

## with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- **CESI 03 ATEX 072 U** Ex e certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +115 °C
- when rail assemblies are to be manufactured for explosive environments (Ex e), please see page A14
- available in standard (beige RAL 1001 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions



beige version	<b>EDM.10</b>	<b>EDM.16</b>	<b>EDM.25</b>
	Cat. No. <b>ED400</b>	Cat. No. <b>ED500</b>	Cat. No. <b>ED600</b>
<b>(Ex)i version</b>	<b>EDM.10 (Ex)i</b>	<b>EDM.16 (Ex)i</b>	<b>EDM.25 (Ex)i</b>
	Cat. No. <b>EI400</b>	Cat. No. <b>EI500</b>	Cat. No. <b>EI600</b>
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	feed-through	feed-through	feed-through
rated cross-section (mm <sup>2</sup> )	10	16	25
connecting capacity			
flexible (mm <sup>2</sup> )	0,5 ÷ 16	0,5 ÷ 25	0,5 ÷ 50
rigid (mm <sup>2</sup> )	0,5 ÷ 16	0,5 ÷ 25	0,51 ÷ 50
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	10 - WP100/21	4 - WP160/22	25 - WP250/29
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 57 A / B6	800 V / 76 A / B7	800 V / 101 A / B8
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	600 V / 50 A / 20 ÷ 8 AWG / 13,3 lb.in	600 V / 100 A / 20-3 AWG / 19,9 lb.in	600 V / 100 A / 16 - 3 AWG / 22,1 lb.in
rated impulse withstand voltage / pollution degree	500	500	630
rated impulse withstand voltage / pollution degree	8 KV / 3	8 KV / 3	8 KV / 3
insulation stripping length (mm)	15	17	19
tightening torque value (test / max) (Nm)	1,2 / 1,9	1,8 / 3	2 / 3
height / width / thickness (mm)	-	-	-
height / width / thickness (mm)	57 / 42 / 10	58 / 45 / 12	64 / 52 / 16
height / width / thickness (mm)	G32		
<b>APPROVALS</b>			
<b>ACCESSORIES</b>			
End sections	beige blue		
Permanent cross connection			
Rated current carrying capacity of jumper (A)			
Switchable cross connection			
Multiple common bar	250 mm		
Shunting screw and sleeve (same, Ex e version)			
Coloured partition	red, green, white		
Cross connection barrier	red		
Test plug socket			
Test plug			
Modular test plug			
End section for modular test plug			
Numbering strip			
Warning plate	on adjacent terminal blocks		
Cover for cross-connection			
Marking tag	printed or blank		
End bracket			
Mounting rail according to IEC 60715 Std.			

Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
<b>EDM/4-10/PT</b>	ED401	<b>EDM/16/PT</b>	ED501	<b>EDM/25/PT</b>	ED601
<b>EDM/4-10/PT (Ex)i</b>	EI401	<b>EDM/16/PT (Ex)i</b>	EI501	<b>EDM/25/PT (Ex)i</b>	EI601
<b>PM/10/2</b> poles (pre-assembled)	PM102	<b>POF/05 (PFX/05)</b>	POF05 (PFX05)	<b>POF/06 (PFX/06)</b>	POF06 (PFX06)
<b>PM/10/3</b> poles (pre-assembled)	PM103	(same, Ex e version)		(same, Ex e version)	
<b>PM/10/5</b> poles (pre-assembled)	PM105				
<b>PM/10/10</b> poles (pre-assembled)	PM100				
<b>57</b>		<b>76</b>		<b>125</b>	
<b>POS/04</b>	POS44	<b>POS/04</b>	POS44	<b>POS/66</b>	POS66
<b>PMP/04</b>	PMP04	<b>PMP/05</b>	PMP05	<b>PMP/06</b>	PMP06
<b>CPM/03 (CPX/03)</b>	CPM03 (CPX03)	<b>CPM/05 (CPX/05)</b>	CPM05 (CPX05)	<b>CPM/06 (CPX/06)</b>	CPM06 (CPX06)
<b>DFU/4</b>	DU04..	<b>DFU/4</b>	DU04..	<b>DFU/5</b>	DU05..
-		-		-	
<b>PSD/B</b>	PD002	<b>PSD/B</b>	PD002	<b>PSD/B</b>	PD002
<b>SDD/2</b>	DD002	<b>SDD/2</b>	DD002	<b>SDD/2</b>	DD001
-		-		-	
-		-		-	
-		-		-	
<b>TTM/04</b> on 3	TTM04	<b>TUM/05</b> on 3 and on 4	TUM05	<b>TUM/06</b> on 3 and on 4	TUM06
<b>TQM/04</b> on 4	TQM04	-		-	
<b>PRP/7</b>	PRP07	<b>PRP/7</b>	PRP07	<b>PRP/8</b>	PRP08
<b>CNU/8/51</b>	NU0851	<b>CNU/8/51</b>	NU0851	<b>CNU/8/51</b>	NU0851
<b>CSC</b> (with ADR adapter)	CS...	<b>CSC</b> (with ADR adapter)	CS...	<b>CSC</b> (with ADR adapter)	CS...
<b>BTU</b> for PR/DIN and PR/3	BT005	<b>BTU</b> for PR/DIN and PR/3	BT005	<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001	<b>BT/DIN/PO</b> for PR/DIN only	BT001	<b>BT/DIN/PO</b> for PR/DIN only	BT001
-		-		-	
<b>PR/DIN/AC</b> of steel	PR001	<b>PR/DIN/AC</b> of steel	PR001	<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004	<b>PR/DIN/AS</b> same with slots	PR004	<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002	<b>PR/DIN/AL</b> of aluminium	PR002	<b>PR/DIN/AL</b> of aluminium	PR002
-		-		-	
-		-		-	

# EDM Series

## with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- **CESI 03 ATEX 072 U Ex e** certificate  
I M2 / II 2 G D operating temperature range: -40 ÷ +115 °C
- when rail assemblies are to be manufactured for explosive environments (Ex e), please see page A14
- available in standard (beige RAL 1001 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions




Version provided for the connection of an unprepared flexible conductor, up to 50 mm<sup>2</sup> and of a lug (Ø 6 mm screw with max width 15 mm) or of a bar (2 x 15 mm max).

beige version		EDM.35		EDM.70		EDM.70/BC	
		Cat. No.	ED700	Cat. No.	ED820	Cat. No.	ED860
(Ex)i version		EDM.35 (Ex)i		EDM.70 (Ex)i			
		Cat. No.	EI700	Cat. No.	EI810		
TECHNICAL CHARACTERISTICS							
function / type		feed-through		feed-through		feed-through, bar/cable version	
rated cross-section	(mm <sup>2</sup> )	35		70		50	
connecting capacity							
flexible	(mm <sup>2</sup> )	1,5 ÷ 50		1,5 ÷ 95		1,5 ÷ 50	
rigid	(mm <sup>2</sup> )	1 ÷ 70		1 ÷ 95		1 ÷ 50	
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type		35 - WP350/30					
rated voltage / rated current / gauge	conf. to IEC 60947-7-1	800 V / 125 A / B9		800 V / 192 A / B11		800 V / 192 A / B11	
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)	600 V / 130 A / 16 ÷ 1 AWG / 33,2 lb.in		600 V / 220 A / 12-4/0 AWG / 50 lb.in		-	
rated impulse withstand voltage / pollution degree		630		630		-	
insulation stripping length	(mm)	8 KV / 3		8 KV / 3		8 KV / 3	
tightening torque value (test / max)	(Nm)	22		24		24	
height / width / thickness	TH/35 7,5 mm	2,5/ 4		3 / 5		3 / 5	
height / width / thickness	TH/35 15 mm	-		-		-	
height / width / thickness	G32	65 / 58 / 18,5		74 / 62 / 21		74 / 62 / 21	
						Approvals referred to EDM.70 standard version	
APPROVALS							
ACCESSORIES							
End sections	beige blue	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
Permanent cross connection		EDM/35/PT	ED701	EDM/70/PT	ED801	EDM/70/PT	ED801
		EDM/35/PT (Ex)i	EI701	EDM/70/PT (Ex)i	EI801	-	-
		POF/07 (PFX/07)	POF07 (PFX07)	POF/08 (PFX/08)	POF08 (PFX08)	-	-
		(same, Ex e version)		(same, Ex e version)		-	-
Rated current carrying capacity of jumper	(A)	<b>150</b>		<b>192</b>		-	-
Switchable cross connection		POS/77	POS77	POS/08	POS08	-	-
Multiple common bar	250 mm	PMP/07	PMP07	PMP/08	PMP08	-	-
Shunting screw and sleeve (same, Ex e version)		CPM/07 (CPX/07)	CPM07 (CPX07)	CPM/08 (CPX/08)	CPM08 (CPX08)	-	-
Coloured partition	red, green, white	DFU/5	DU05..	DFU/6	DU06..	<b>DFU/6</b>	DU06..
Cross connection barrier	red	-		-		-	-
Test plug socket		PSD/C	PD003	PSD/C	PD003	-	-
Test plug		SDD/2	DD002	SDD/2	DD002	-	-
Modular test plug		-		-		-	-
End section for modular test plug		-		-		-	-
Numbering strip		-		-		-	-
Warning plate	on adjacent terminal blocks	TUM/07 on 3 and on 4	TUM07	TUM/08 on 3 and on 4	TUM08	TUM/08 on 3 and on 4	TUM08
Cover for cross-connection		-		-		-	-
Marking tag	printed or blank	PRP/8	PRP08	PRP/8	PRP08	-	-
		CNU/8/51	NU0851	CNU/8/51	NU0851	<b>CNU/8/51</b>	NU0851
		CSC (with ADR adapter)	CS...	CSC (with ADR adapter)	CS...	<b>CSC (with ADR adapter)</b>	CS...
		BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005	<b>BTU for PR/DIN and PR/3</b>	BT005
		BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001	<b>BT/DIN/PO for PR/DIN only</b>	BT001
		-		-		-	-
Mounting rail according to IEC 60715 Std.		PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001
		PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004
		PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002
		-		-		-	-
		-		-		-	-

# SV Series feed-through terminal blocks

with UL94V-0 (5V) melamine  
insulating body

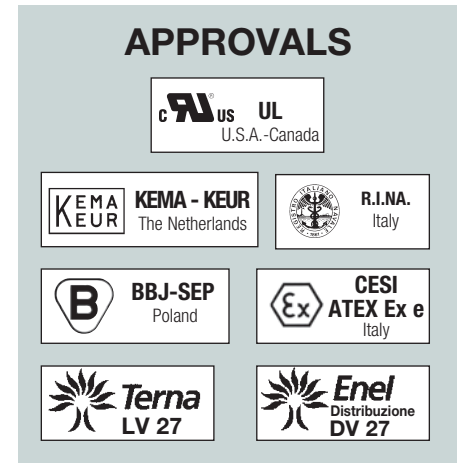

**S**V series is formed by four feed-through terminal blocks in the following rated cross-sections, measured in mm<sup>2</sup>:

**2,5 4 6 10**

**type of connection:** by means of screws, on both sides, indirect and anti-loosening, thanks to the action of the loading springs. The tightening screws are accessible only with an adequate screwdriver and the particular shape of the screws makes it impossible to lose them. The tightening process by screws ensures the best mechanical retention and efficiency of the flow of the current. It is suitable for connection, with or without special preparation, of conductors of all cross-sections. The tightening and loosening operations are extremely simple and they can be performed with tools, such as screwdrivers which are always at hand. It is however important to use an appropriately sized screwdriver in order to avoid damaging either the screw itself or the insulating body.

**conducting body and clamping system:** it is constituted by wire clamping collars, with captive screws and conducting busbar, entirely made of a nickel plated zinc/copper alloy and with loading springs in passivated zinc plated steel.

**tightening reliability:** special orthogonal grooves on the inner surfaces of the wire clamping collars and on the surface of the conducting busbar, ensure a perfect electrical contact with the conductors and an efficient mechanical clamp. In presence of vibrations, even of high intensity, the two springs which are placed between the clamping collars and the insulating body, have the “shock absorbing” function. As a consequence, the two systems constituted by, respectively the conductors inwards and outwards from the terminal blocks, connected one to another by the busbar on one side, and by the insulating body of the terminal block fixed onto the rail, on the other side, are in this way completely independent. In addition the antiloosening connection of the conductor is guaranteed by the elasticity of the wire clamping collar, once the screw is under the tightening force of the conductor.

**ease of insertion:** insertion of the conductor into the terminal block is made easy by:

- sloping entrance planes on the insulating body
- the small tab on the wire clamping collar, which also avoids the insertion out from the collar itself
- a countersink on the lead-in of the collars
- an appropriately sized entrance hole, with reference to the diameter of the maximum permitted conductor. The depth into which the conductor can be inserted is limited by a partition in the insulating body.

**other functions:** besides their main functions as feed-through, SV terminal blocks are designed in such a way as to carry out other functions. These are:

- to create a cross connection (either permanent or switchable), between two adjoining terminal blocks (by simply eliminating the diaphragm existing in the insulating body)
- create a multiple commoning bar connection between several adjoining terminal blocks
- insert a socket for a test plug

**marking:** all SV terminal blocks can be marked on both sides by using CNU/8, SNZ or CSC marking tags (the latter system allows the composition of alphanumeric signs up to a maximum of 6 characters (but an ADR adapter is required).

**mounting:** melamine terminal blocks of SV series are designed to be mounted on PR/DIN mounting rails, according to IEC 60715 Std., “G32” type.

# SV Series

with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- **CESI 02 ATEX 135 U** Ex e certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +115 °C
- when rail assemblies are to be manufactured for explosive environments (Ex e), please see page A14
- available in standard (beige RAL 1001 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions



beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

## APPROVALS



ACCESSORIES	
End sections	beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

SV.2	Cat. No.	SV100
SV.2 (Ex)i	Cat. No.	SI100
feed-through		
2,5		
0,2 ÷ 2,5		
0,2 ÷ 2,5		
2,5 - WP25/14		
800 V / 24 A / A2		
600 V / 15 A / 20-14 AWG / 0,79 Nm		
500		
8 KV / 3		
11		
0,4 / 0,8		
-		
53 / 40 / 5,5		



Type	Cat. No.
SV/2/PT	SV101
SV/2/PT (Ex)i	SI101
POF/11 (PFX/11)	POF11 (PFX11)
(same, Ex e version)	
<b>24</b>	
POS/11	POS11
PMP/01	PMP01
CPM/11 (CPX/11)	CPM11 (CPX11)
DFU/4	DU04..
-	
PSD/D	PD004
SDD/1	DD001
-	
-	
-	
TQM/02 on 4	TQM02
-	
-	
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
-	
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	
-	

SV.4	Cat. No.	SV200
SV.4 (Ex)i	Cat. No.	SI200
feed-through		
4		
0,2 ÷ 6		
0,2 ÷ 6		
4 - WP40/16		
800 V / 32 A / A4		
600 V / 20 A / 20-12 AWG / 0,79 Nm		
500		
8 KV / 3		
13		
0,5 / 1,2		
-		
54 / 45 / 7		




Type	Cat. No.
SV/4/PT	SV201
SV/4/PT (Ex)i	SI201
POF/12 (PFX/12)	POF12 (PFX12)
(same, Ex e version)	
<b>32</b>	
POS/12	POS12
PMP/12	PMP12
CPM/12 (CPX/12)	CPM12 (CPX12)
DFU/4	DU04..
-	
PSD/A	PD001
SDD/1	DD001
-	
-	
-	
TTM/12 on 3	TTM12
TQM/12 on 4	TQM12
-	
-	
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
-	
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	
-	

# SV Series

## with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- **CESI 02 ATEX 135 U** Ex e certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +115 °C
- when rail assemblies are to be manufactured for explosive environments (Ex e), please see page A14
- available in standard (beige RAL 1001 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions

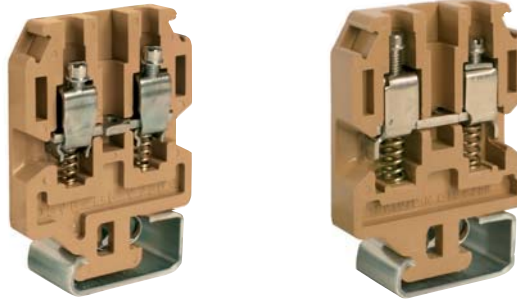

beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage  /  (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS

ACCESSORIES	
End sections	beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve (same, Ex e version)	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

SV.6	Cat. No.	SV300
SV.6 (Ex)i	Cat. No.	SI300
feed-through		
6		
1,5 ÷ 10		
1,5 ÷ 10		
6 - WP60/20		
800 V / 41 A / A5		
600 V / 30 A / 20-10 AWG / 7 lb.in		
500		
8 KV / 3		
13		
0,8 / 1,4		
-		
63 / 45 / 8		



Type	Cat. No.
SV/6/PT	SV301
SV/6/PT (Ex)i	SI301
POF/13 (PFX/13)	POF13 (PFX13)
(same, Ex e version)	
<b>41</b>	
POS/13	POS13
PMP/13	PMP13
CPM/13 (CPX/13)	CPM13 (CPX13)
DFU/5	DU05..
-	
PSD/E	PD005
SDD/1	DD001
-	
-	
-	
TTM/13 on 3	TTM13
TQM/13 on 4	TTM13
-	
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
-	
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	
-	

SV.10	Cat. No.	SV400
SV.10 (Ex)i	Cat. No.	SI400
feed-through		
10		
1,5 ÷ 16		
1,5 ÷ 16		
10 - WP100/21		
800 V / 57 A / B6		
600 V / 55 A / 16-6 AWG / 7 lb.in		
630		
8 KV / 3		
13		
1,2 / 1,9		
-		
64 / 45 / 10,5		




Type	Cat. No.
SV/10/PT	SV401
SV/10/PT (Ex)i	SI401
POF/14 (PFX/14)	POF14 (PFX14)
(same, Ex e version)	
<b>57</b>	
POS/14	POS14
PMP/14	PMP14
CPM/14 (CPX/14)	CPM14 (CPX14)
DFU/5	DU05..
-	
PSD/F	PD006
SDD/2	DD001
-	
-	
-	
TTM/14 on 3	TTM14
TQM/12 on 4	TQM14
-	
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
-	
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	
-	

# Terminal blocks for test and measurement circuits



**SCX/PO/2** Cat. No. SC103



**SCX/PO/4** Cat. No. SC104



**SCX/CPM** Cat. No. SC105

All Cabur feed-through terminal blocks are suited to be employed in test and measurement circuits. Nevertheless, in order to realise in the optimum way the connections of the secondary circuits of measuring current transformers, the use of **SCX** series terminals is recommended; this in fact guarantees:

- high reliability and safety of both switchable and permanent electrical connections
- immediate identification of the function of the components and of the condition of the circuits
- the performing of separate blocks of disconnect and short circuit
- adequate dimensioning, in order to withstand the whole load of the connected conductors.


The use of **SCX/PO/2** (for two adjoining terminal blocks) and **SCX/PO/4** (for four adjoining terminal blocks) special cross connections and of **SCX/CPM**, screws and sleeves, enable to link to earth simultaneously the current transformers connected to the terminal blocks themselves, assuring the correct operational sequence. In fact such cross connections, in "open" position, prevent the manoeuvring of the slide links, avoiding the

disconnection of the current carrying circuits.



Switchable cross connections, already located outwards in an accident prevention position, must be adequately distanced from both adjoining cross connections and terminal blocks, by enclosing, within end barriers, the disconnect group. It is possible to perform shunts from the SCX.10 terminal block by means of silver plated brass SDD/2 test plugs, which can be inserted:

- in the SCX/CPM sleeves of the switchable cross connection
- in the PSD/L sockets, which can be screwed directly on to the conducting body, in order to perform solely the shunting function

The slide link is constituted by two wipers, locked by a screw inserted in a collar which enables the elastic anti-loosening clamping to the slide link and the easy positioning of the screw driver, during disconnect operations SCX.10 type disconnect terminal blocks enable the composition of various test or control circuits, some of which are shown below.

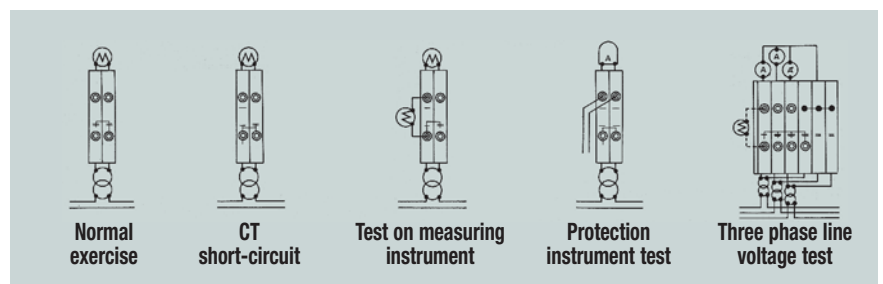

Connection schemes

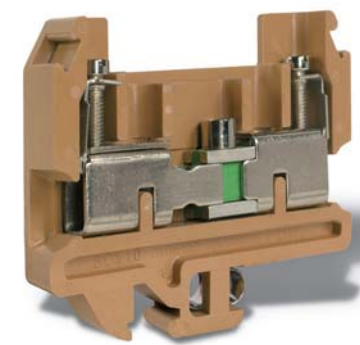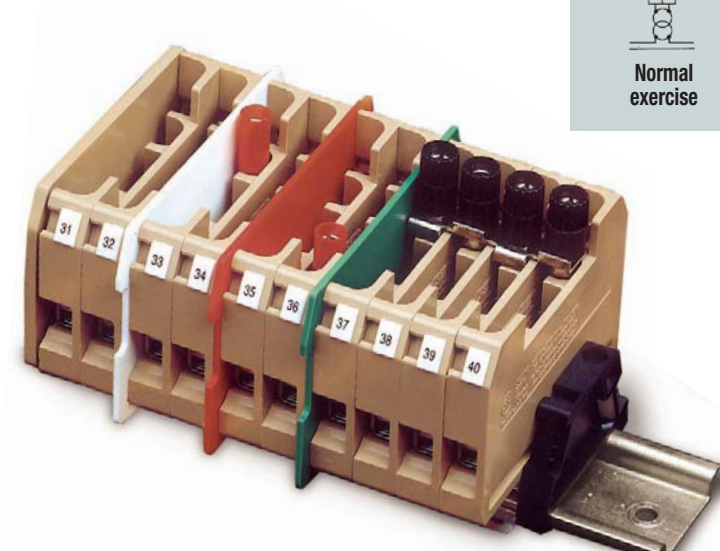

# Disconnect

with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN or PR/3 type rails - according to IEC 60715 Std., "G32" and TH/35 types



NOTE:  
version to be mounted onto rails according to IEC 60715 Std. - type TH35

### SCX.10/DD

Slide link disconnect test terminal block that allows longitudinal disconnection. Configuration provided with a test plug socket downstream and upstream the slide link, according to the ENEL LV27/3 specifications

**SCX.10/0-DD** Cod. **SC210**  
version to be mounted onto rails according to IEC 60715 Std., "TH/35" type

beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

SCX.10	Cat. No.	SC100
slide link disconnect		
10		
0,5 ÷ 16		
0,5 ÷ 16		
10 - WP100/21		
800 V / 57 A / B6		
600 V / 45 A / 20-8 AWG / 7 lb.in		
-		
8 KV / 3		
14		
1,2 / 1,9		
-		
63 / 73 / 10,5		

SCX.10/0	Cat. No.	SC400
slide link disconnect		
10		
0,5 ÷ 16		
0,5 ÷ 16		
10 - WP100/21		
800 V / 57 A / B6		
600 V / 45 A / 20-8 AWG / 7 lb.in		
-		
8 KV / 3		
14		
1,2 / 1,9		
63 / 73 / 10,5		
71 / 73 / 10,5		
-		

SCX.10/DD	Cat. No.	SC110
slide link disconnect in special configuration		
10		
0,5 ÷ 16		
0,5 ÷ 16		
10 - WP100/21		
800 V / 57 A / B6		
-		
8 KV / 3		
14		
1,2 / 1,9		
72 / 73 / 10,5 (version /0 only)		
80 / 73 / 10,5 (version /0 only)		
72 / 73 / 10,5		

## APPROVALS



Other approvals referred to SCX.10

ACCESSORIES	
End sections	beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Short-circuit plate	between adjoining terminal blocks
Sleeve for bar	
Marking tag	printed or blank
End bracket	
Mounting rail according to IEC 60715 Std.	

Type	Cat. No.
SCX/PT	SC101
POF/56	POF56
57	
-	
PMP/56	PMP56
CPM/56	CPM56
DFU/7	DU07..
-	
PSD/L	PD009
SDD/2	DD002
-	
-	
SCX/PO/2 on 2	SC103
SCX/PO/4 on 4	SC104
SCX/CPM	SC105
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
-	
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	
-	

Type	Cat. No.
SCX/PT	SC101
POF/56	POF56
57	
-	
PMP/56	PMP56
CPM/56	CPM56
DFU/7	DU07..
-	
PSD/L	PD009
SDD/2	DD002
-	
-	
SCX/PO/2 on 2	SC103
SCX/PO/4 on 4	SC104
SCX/CPM	SC105
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/3 for PR/3 only	BT003
-	
-	
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005


Type	Cat. No.
SCX/PT	SC101
POF/56	POF56
57	
-	
PMP/56	PMP56
CPM/56	CPM56
DFU/7	DU07..
-	
PSD/L	PD009
SDD/2	DD002
-	
-	
SCX/PO/2 on 2	SC103
SCX/PO/4 on 4	SC104
SCX/CPM	SC105
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
-	
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	
-	



# Disconnect

with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN or PR/3 type rails - according to IEC 60715 Std., "G32" and TH/35 types

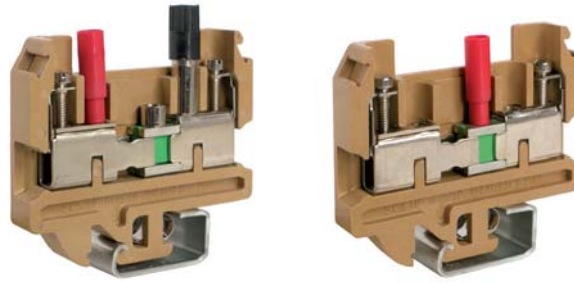

**SCX.10/CD**

Slide link disconnect test terminal block that allows longitudinal and transversal disconnection.  
Configuration provided with a test plug socket downstream and upstream the slide link, according to the ENEL LV27/2 specifications

**NOTE:**  
Terminal block type SCX.10/PI is also available in the following versions:

**SCX.10/O-CD** Cod. **SC220**  
version to be mounted onto rails according to IEC 60715 Std., "TH/35" type

**SCX.10/O/PI** Cod. **SC500**  
**SCX.10/PI/CD** Cod. **SC230**  
**SCX.10/PI/DD** Cod. **SC240**

<b>beige version</b>	
<b>(Ex)i version</b>	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32
<b>APPROVALS</b>	
<b>ACCESSORIES</b>	
End sections	beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Short-circuit plate	between adjoining terminal blocks
Sleeve for bar	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

<b>SCX.10-CD</b>	
Cat. No.	<b>SC120</b>
slide link disconnect in special configuration	
10	
0,5 ÷ 16	
0,5 ÷ 16	
10 - WP100/21	
800 V / 57 A / B6	
-	
-	
8 KV / 3	
14	
1,2 / 1,9	
73 / 73 / 10,5 (version /0 only)	
81 / 73 / 10,5 (version /0 only)	
73 / 73 / 10,5	

<b>SCX.10/PI</b>	
Cat. No.	<b>SC200</b>
disconnect by slide link	
10	
0,5 ÷ 16	
0,5 ÷ 16	
10 - WP100/21	
800 V / 57 A / B6	
-	
-	
8 KV / 3	
14	
1,2 / 1,9	
63 / 73 / 10,5 (version /0 only)	
71 / 73 / 10,5 (version /0 only)	
63 / 73 / 10,5	



Other approvals referred to SCX.10

Approvals referred to SCX.10

Type	Cat. No.
<b>SCX/PT</b>	SC101
-	
<b>POF/56</b>	POF56
-	
<b>57</b>	
-	
<b>PMP/56</b>	PMP56
<b>CPM/56</b>	CPM56
<b>DFU/7</b>	DU07..
-	
<b>PSD/L</b>	PD009
<b>SDD/2</b>	DD002
-	
-	
-	
<b>SCX/PO/2</b> on 2	SC103
<b>SCX/PO/4</b> on 4	SC104
<b>SCX/CPM</b>	SC105
<b>CNU/8/51</b>	NU0851
<b>CSC</b> (with ADR adapter)	CS...
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
-	
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
-	
-	

Type	Cat. No.
<b>SCX/PT</b>	SC101
-	
<b>POF/56</b>	POF56
-	
<b>57</b>	
-	
<b>PMP/56</b>	PMP56
<b>CPM/56</b>	CPM56
<b>DFU/7</b>	DU07..
-	
<b>PSD/L</b>	PD009
<b>SDD/2</b>	DD002
-	
-	
-	
<b>SCX/PO/2</b> on 2	SC103
<b>SCX/PO/4</b> on 4	SC104
<b>SCX/CPM</b>	SC105
<b>CNU/8/51</b>	NU0851
<b>CSC</b> (with ADR adapter)	CS...
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/DIN/PO</b> for PR/DIN only	BT001
-	
<b>PR/DIN/AC</b> of steel	PR001
<b>PR/DIN/AS</b> same with slots	PR004
<b>PR/DIN/AL</b> of aluminium	PR002
-	
-	

# Fuse-holders

## with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type

to be discontinued



The terminal block is equipped with a lever suited to house:

- SFC/CO, conducting element in order to perform the simple disconnect operation, with shunting possibility.
- Ø 6.3 x 32 mm - 500 V - 25 A max. fuse

NOTE:  
the Ø 6.3 x 32 mm fuse is not of our normal supply.



The terminal block is equipped with a lever suited to house a Ø 6.3 x 32 mm - 500 V - 25 A max. fuse and a LED signal circuit. The interruption of the fuse determines the ignition of the LED.



With cartridges suited to house a **F5** - Ø 5 x 20 mm type **fuse** or **CO/5** type - Ø 5 x 20 mm **connecting element** in order to perform the simple disconnection.



**CF5**  
Cat. No. FL404

NOTE:  
F5/... type fuse and CO/5 type conducting element are supplied separately.

(\*) values referred to the insulating characteristics of the terminal block  
(\*\*) for simultaneous disconnection of adjoining terminal blocks

beige version	SFC.10 Cat. No. FC100	SFL.10 Cat. No. FC200	FLD.10/F5 Cat. No. FL400
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	disconnect by lever fuse-holder	disconnect by lever fuse-holder with LED signal circuit	for fuse or shunting element
rated cross-section (mm <sup>2</sup> )	10	10	10
connecting capacity			
flexible (mm <sup>2</sup> )	1,5 ÷ 16	1,5 ÷ 16	0,5 ÷ 16
rigid (mm <sup>2</sup> )	1,5 ÷ 16	1,5 ÷ 16	0,5 ÷ 16
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	10 - WP100/21	10 - WP100/21	10 - WP100/21
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V (*) / 10 A (20 with SFC/CO) / B6	800 V (*) / 10 A / B6	800 V (*) / 6,3 A / B6
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	600 V / 15 A / 20-6 AWG / 7 lb.in	300 V / 15 A / 20 ÷ 6 AWG / 7 lb.in	-
rated impulse withstand voltage / pollution degree	8 kV (*) / 3	8 kV (*) / 3	6 kV (*) / 3
insulation stripping length (mm)	16	16	14
tightening torque value (test / max) (Nm)	1,2 / 1,9	1,2 / 1,9	1,2 / 1,9
height / width / thickness	-	-	-
height / width / thickness	-	-	-
height / width / thickness	70 / 69 / 12	75 / 69 / 12	64 / 63 / 11
<b>APPROVALS</b>			
<b>ACCESSORIES</b>	<b>Type</b> <b>Cat. No.</b>	<b>Type</b> <b>Cat. No.</b>	<b>Type</b> <b>Cat. No.</b>
End sections	<b>SFC/PT</b> FC101	<b>SFC/PT</b> FC101	<b>FLD/PT</b> FL101
Coloured partition	<b>DFU/6</b> DU06..	<b>DFU/6</b> DU06..	<b>DFU/6</b> DU06..
MSM handle (6 elements) (**)	<b>MSM</b> FC103	<b>MSM</b> FC103	<b>DFU/6</b> DU06..
Miniature fuse	-	-	<b>F5/..</b> FN..ST
Conducting element	<b>SFC/CO</b> FC102	<b>CIL/12-24-48-115-230</b> SF5..	<b>CO/5</b> VL103
LED signal circuit	-	-	-
Calibration resistance	-	-	-
Test plug	<b>SDD/2</b> DD002	<b>SDD/2</b> DD002	<b>SDD/2</b> DD002
Marking tag	<b>CNU/8/51</b> NU0851	<b>CNU/8/51</b> NU0851	<b>CNU/8/51</b> NU0851
End bracket	<b>CSC</b> (with ADR adapter) CS...	<b>CSC</b> (with ADR adapter) CS...	<b>CSC</b> (with ADR adapter) CS...
Mounting rail	<b>BTU</b> for PR/DIN and PR/3 BT005	<b>BTU</b> for PR/DIN and PR/3 BT005	<b>BTU</b> for PR/DIN and PR/3 BT005
according to IEC 60715 Std.	<b>BT/DIN/PO</b> for PR/DIN only BT001	<b>BT/DIN/PO</b> for PR/DIN only BT001	<b>BT/DIN/PO</b> for PR/DIN only BT001
	<b>PR/DIN/AC</b> of steel PR001	<b>PR/DIN/AC</b> of steel PR001	<b>PR/DIN/AC</b> of steel PR001
	<b>PR/DIN/AS</b> same with slots PR004	<b>PR/DIN/AS</b> same with slots PR004	<b>PR/DIN/AS</b> same with slots PR004
	<b>PR/DIN/AL</b> of aluminium PR002	<b>PR/DIN/AL</b> of aluminium PR002	<b>PR/DIN/AL</b> of aluminium PR002

# Component holders

## with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type



With  $\varnothing 6 \times 25$  mm or  $\varnothing 6,3 \times 23$  mm fuse-holder cartridge - suited to hold our **LSN**  $\varnothing 6 \times 26$  mm lamp for voltages exceeding 70 V.



Fuse-holder terminal block for our  $\varnothing 5 \times 20$  mm **F5** type fuse and **LSN** ( $\varnothing 6 \times 26$  mm) lamp for voltages exceeding 70 V. The fuse blow-out determines the ignition of the lamp.



Terminal block type **FLD.10/D** allows the insertion of a 1 A diode (i.e. types 1N 4001 ÷ 4007 or BY 127) or 3 A diode (i.e. types BY 251 ÷ 255 or 1N 5401 ÷ 5407).

### NOTE:

- $\varnothing 6 \times 25$  mm or  $\varnothing 6,3 \times 23$  mm are not of normal supply
- F5 fuse and LSN lamp are supplied separately



**CF6**  
Cat. No. FL304



**CF5L**  
Cat. No. FL204



**CFD**  
Cat. No. FL504

(\*) values referred to the insulating characteristics of the terminal block

beige version	FLD.10/F6 Cat. No. FL300	FLD.10/F5L Cat. No. FL200	FLD.10/D Cat. No. FL500
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	for fuse and signal lamp	for fuse and signal lamp	for diode
rated cross-section (mm <sup>2</sup> )	10	10	10
connecting capacity			
flexible (mm <sup>2</sup> )	0,5 ÷ 16	0,5 ÷ 16	0,5 ÷ 16
rigid (mm <sup>2</sup> )	0,5 ÷ 16	0,5 ÷ 16	0,5 ÷ 16
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	10 - WP100/21	10 - WP100/21	10 - WP100/21
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V (*) / 6,3 A max / B6	800 V (*) / 6,3 A max / B6	800 V (*) / 6,3 A / B6
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage (V)	-	-	-
rated impulse withstand voltage / pollution degree	6 kV (*) / 3	6 kV (*) / 3	6 kV (*) / 3
insulation stripping length (mm)	14	14	14
tightening torque value (test / max) (Nm)	1,2 / 1,9	1,2 / 1,9	1,2 / 1,9
height / width / thickness TH/35 7,5 mm	-	-	-
height / width / thickness TH/35 15 mm	-	-	-
height / width / thickness G32	64 / 63 / 11	64 / 63 / 11	64 / 63 / 11

## APPROVALS



ACCESSORIES	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
End sections beige blue	FLD/PT	FL101	FLD/PT	FL101	FLD/PT	FL101
Switchable cross connection	-	-	-	-	-	-
Permanent cross connection	-	-	-	-	-	-
Multiple common bar 250 mm	-	-	-	-	-	-
Shunting screw and sleeve	-	-	-	-	-	-
Coloured partition red, green, white	DFU/6	DU06..	DFU/6	DU06..	DFU/6	DU06..
Miniature fuse $\varnothing 5 \times 20$ mm	-	-	F5	FN...	-	-
Signal lamp	LSN	FL202	LSN	FL202	-	-
Test plug socket	-	-	-	-	-	-
Test plug	-	-	-	-	-	-
Warning plate on adjacent terminal blocks	-	-	-	-	-	-
Cover for cross-connection	-	-	-	-	-	-
Marking tag printed or blank	CNU/8/51	NU0851	CNU/8/51	NU0851	CNU/8/51	NU0851
	CSC (with ADR adapter)	CS...	CSC (with ADR adapter)	CS...	CSC (with ADR adapter)	CS...
	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005	BTU for PR/DIN and PR/3	BT005
	BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001	BT/DIN/PO for PR/DIN only	BT001
	PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001	PR/DIN/AC of steel	PR001
	PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004	PR/DIN/AS same with slots	PR004
	PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002	PR/DIN/AL of aluminium	PR002
	-	-	-	-	-	-

# Fuse-holders

with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type



For our (Ø 5 x 20 mm) F5 type fuse



NOTE:  
Version suited to be mounted onto rails acc. to IEC 60715 Std., TH35 type



Terminal blocks type **VL.16** and **VL.16/0** are suited for fuses type:

- Ø 13 x 50 mm - 500 V **E 16** DIAZED
- Ø 14 x 51 mm - 500 V



Connection of internal metallic parts

(\* ) values referred to the insulating characteristics of the terminal block

beige version	
<b>TECHNICAL CHARACTERISTICS</b>	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL (Ex e) rated voltage (V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

## APPROVALS

ACCESSORIES	
End sections	beige blue
Switchable cross connection	-
Permanent cross connection	250 mm
Multiple common bar	250 mm
Shunting screw and sleeve	-
Coloured partition	red, green, white
Miniature fuse Ø 5x20 mm	-
Signal lamp	-
Test plug socket	-
Test plug	-
Warning plate	on adjacent terminal blocks
Cover for cross-connection	-
Marking tag	printed or blank
End bracket	-
Mounting rail according to IEC 60715 Std.	

VLM.10	Cat. No.	VL200
for fuse		
10		
800 V (*) / 12,5 A max / B6		
600 V / 15 A / 16-6 AWG / 13,3 lb.in		
-		
8 kV (*) / 3		
12		
1,2 / 1,9		
-		
64 / 63 / 13		



VLM.10/0	Cat. No.	VL400
for fuse		
10		
800 V (*) / 12,5 A max / B6		
600 V / 15 A / 16-6 AWG / 13,3 lb.in		
-		
8 kV (*) / 3		
12		
1,2 / 1,9		
64 / 63 / 13		
71 / 63 / 13		
-		



VL.16	Cat. No.	VL300
for fuse E16		
16		
800 V (*) / 25 A max / B7		
600 V / 30 A / 20 ÷ 4 AWG / 20 lb.in		
-		
8 kV (*) / 3		
13		
1,8 / 3		
-		
86 / 79 / 29		



Type	Cat. No.
VLM/PT	VL201
-	-
POF/54	POF54
PMP/54	PMP54
CPM/03	CPM03
DFU/3	DU03..
F5	FN..
-	-
PSD/B	PD002
SDD/2	DD002
-	-
-	-
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
-	-
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	-
-	-



Type	Cat. No.
VLM/PT	VL201
-	-
POF/54	POF54
PMP/54	PMP54
CPM/03	CPM03
DFU/3	DU03..
F5	FN..
-	-
PSD/B	PD002
SDD/2	DD002
-	-
-	-
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/3 for PR/3 only	BT003
-	-
-	-
PR/3/AC of steel	PR003
PR/3/AS same with slots	PR005

Type	Cat. No.
-	-
-	-
POF/55	POF55
PMP/55	PMP55
CPM/05	CPM05
-	-
-	-
PSD/B	PD002
SDD/2	DD002
-	-
-	-
CNU/8/51	NU0851
CSC (with ADR adapter)	CS...
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
-	-
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002
-	-
-	-


# Fuse-holders

## with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type



Terminal blocks type VL.16 and VL.16/0 are suited for fuses type:  
 - Ø 13 x 50 mm - 500 V E 16 DIAZED  
 - Ø 14 x 51 mm - 500 V



Connection of internal metallic parts


(\* ) values referred to the insulating characteristics of the terminal block

beige version	VL.16/0	VL.16/0-R	VL.16/0-M
	Cat. No. <b>VL500</b>	Cat. No. <b>VL510</b>	Cat. No. <b>VL520</b>
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	for fuse E16	for 10,3 x 38,1 mm, cc (rejection type) fuse	for 10,3 x 38,1 mm, midget (non rejection type) fuse
rated cross-section (mm <sup>2</sup> )	16	16	16
connecting capacity			
flexible (mm <sup>2</sup> )	1,5 ÷ 25	1,5 ÷ 25	1,5 ÷ 25
rigid (mm <sup>2</sup> )	1,5 ÷ 25	1,5 ÷ 25	1,5 ÷ 25
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	16 - WP160/22	16 - WP160/22	16 - WP160/22
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V (*) / 25 A max / B7	800 V (*) / 25 A max / B7	800 V (*) / 25 A max / B7
rated voltage / rated current / AWG UL - cUL	600 V / 30 A / 20 ÷ 4 AWG / 20 lb.in	600 V / 30 A / 20 ÷ 4 AWG / 20 lb.in	600 V / 30 A / 20 ÷ 4 AWG / 20 lb.in
(Ex e) rated voltage  /  (V)	-	-	-
rated impulse withstand voltage / pollution degree	8 kV (*) / 3	8 kV (*) / 3	8 kV (*) / 3
insulation stripping length (mm)	13	13	13
tightening torque value (test / max) (Nm)	1,8 / 3	1,8 / 3	1,8 / 3
height / width / thickness  TH/35 7,5 mm	86 / 79 / 29	86 / 79 / 29	86 / 79 / 29
height / width / thickness  TH/35 15 mm	94 / 79 / 29	94 / 79 / 29	94 / 79 / 29
height / width / thickness  G32	-	-	-
<b>APPROVALS</b>			
<b>ACCESSORIES</b>	<b>Type</b>	<b>Type</b>	<b>Type</b>
End sections	beige blue	-	-
Switchable cross connection	-	-	-
Permanent cross connection	250 mm	<b>POF/55</b>	<b>POF/55</b>
Multiple common bar	250 mm	<b>PMP/55</b>	<b>PMP/55</b>
Shunting screw and sleeve	-	<b>CPM/05</b>	<b>CPM/05</b>
Coloured partition	red, green, white	-	-
Miniature fuse Ø 5x20 mm	-	-	-
Signal lamp	-	-	-
Test plug socket	<b>PSD/B</b>	<b>PSD/B</b>	<b>PSD/B</b>
Test plug	<b>SDD/2</b>	<b>SDD/2</b>	<b>SDD/2</b>
Warning plate	on adjacent terminal blocks	-	-
Cover for cross-connection	-	-	-
Marking tag	printed or blank	<b>CNU/8/51</b>	<b>CNU/8/51</b>
End bracket	<b>CSC</b> (with ADR adapter)	<b>CSC</b> (with ADR adapter)	<b>CSC</b> (with ADR adapter)
	<b>BTU</b> for PR/DIN and PR/3	<b>BTU</b> for PR/DIN and PR/3	<b>BTU</b> for PR/DIN and PR/3
	<b>BT/3</b> for PR/3 only	<b>BT/3</b> for PR/3 only	<b>BT/3</b> for PR/3 only
Mounting rail according to IEC 60715 Std.	<b>PR/3/AC</b> of steel	<b>PR/3/AC</b> of steel	<b>PR/3/AC</b> of steel
	<b>PR/3/AS</b> same with slots	<b>PR/3/AS</b> same with slots	<b>PR/3/AS</b> same with slots

# For thermocouples

## with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- **CESI 02 ATEX 134 U** Ex e certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +115 °C
- available in standard (beige RAL 1001 colour) or (Ex)i "intrinsic safety" circuits (blue RAL 5015 colour) versions
- when rail assemblies are to be manufactured for explosive environments (Ex e), please see page A14



(\* values referred to the insulating characteristics of the terminal block)

beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function / type	
rated cross-section	(mm <sup>2</sup> )
connecting capacity	
flexible	(mm <sup>2</sup> )
rigid	(mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG	UL
(Ex e) rated voltage  /	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

### APPROVALS

ACCESSORIES	
End sections	beige blue
Permanent cross connection (premontato)	
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Warning plate	on adjacent terminal blocks
Cover for cross-connection	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

TC/DIN	Cat. No.	TC110
TC/DIN (Ex)i	Cat. No.	TC210
for thermocouple circuits		
Ø 0,8 a 1,3 mm thermocouples		
800 V / - / -		
500		
500		
8 kV / 3		
20		
0,5 / 1,2		
47 / 36 / 5,5		



Type	Cat. No.
EDM/2/PT	ED101
EDM/2/PT (Ex)i	EI101
DFU/1	DU01..
CNU/8/51	NU0851
CSC (with ADR adapter)	CS..
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
PR/DIN/AC of steel	PR001
PR/DIN/AS same with slots	PR004
PR/DIN/AL of aluminium	PR002

(TC/DIN) - Special version of feed-through EDM.2, terminal block suitable for the connection of any type of conductor for thermocouple circuits. In fact, due to the excellent electrical contact which results, thermocouple circuits of any type can be tightened up without the intervention of any other compensation material.

Such a solution allows, in addition to the running of one single item, the reduction of points of contact in the complete circuit.

In order to make the connection completely efficient and permanent the range of diameters of the connectable thermocouples must be within the 0.8 and 1.3 mm range.

The thermocouple circuits, even those having different diameters, stripped of their insulating protection for a length of 20 mm, are overlapped in the inside of the terminal block in such a way as to allow the direct flow of thermoelectrical e.m.f. without the intermediary of a metal body, as it happens in normal circuits.

With the double clamping, assured by two screws and by the interposition of the pressure plate, the possibility of e.m.f. caused by lack of homogeneity of the contacts is reduced to more or less nothing.

# CDA Series high current terminal blocks

## with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type

Within the range of melamine insulated feed-through terminal blocks, **CDA** series terminals represent the so-called "power terminal blocks", with relatively large rated cross sections and consequently high current carrying capacity. The series is formed by homotetic terminal blocks, in the following rated cross-sections in mm<sup>2</sup>, referred to flexible conductors:

**70 120 185**

For each of the three sizes, three different versions are available, depending on the **type of connection**:

### - bar/bar (/BB):

which allows the connection, on both sides, of conductors provided with lugs or two bars

### - bar/cable (/BC):

which allows the connection of two cables, of which one is provided with a lug and the other is without special preparation

### - cable/cable (/CC):

which allows, on both sides, the connection of conductors without special preparation.


CDA series terminal blocks have the possibility to be modified according to the specific needs; in fact from the bar/bar version it is possible to obtain the bar/cable or the cable/cable version, by simply removing the screw, the washer and the nut from either one or both the sides of the conducting busbar and inserting one or two CDA/CO wire clamping collars, which can be supplied apart as normal accessories.

### tightening reliability:

the clamping of the cable lug or the bar onto the conducting busbar is secured by means of a screw and a nut and with the interposition of a grower washer.


In the collar clamping versions, the reliability is guaranteed by the particular shape of the pressure block, manufactured in such a way as to exploit the reaction to the pressure force on the conductors as a lock for the screw, even in presence of vibrations and other dynamic stress.

Furthermore, both the conducting busbar and the pressure lock are provided with transversal grooving which ensure a perfect electrical contact an efficient mechanical retention.

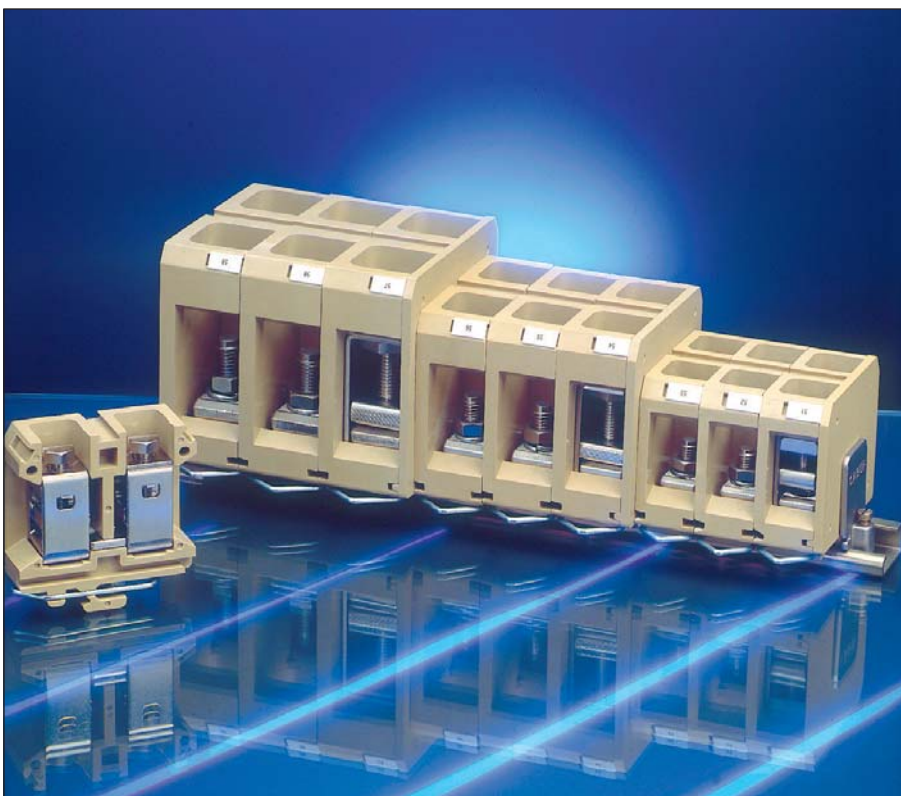

#### NOTE:

in the wire clamping collar versions, the tightening screw is provided with both the slot for the screwdriver (of adequate dimension) for the preliminary tightening of the conductor, and with hexagon head for the definitive tightening, up to the requested values of tightening torque.

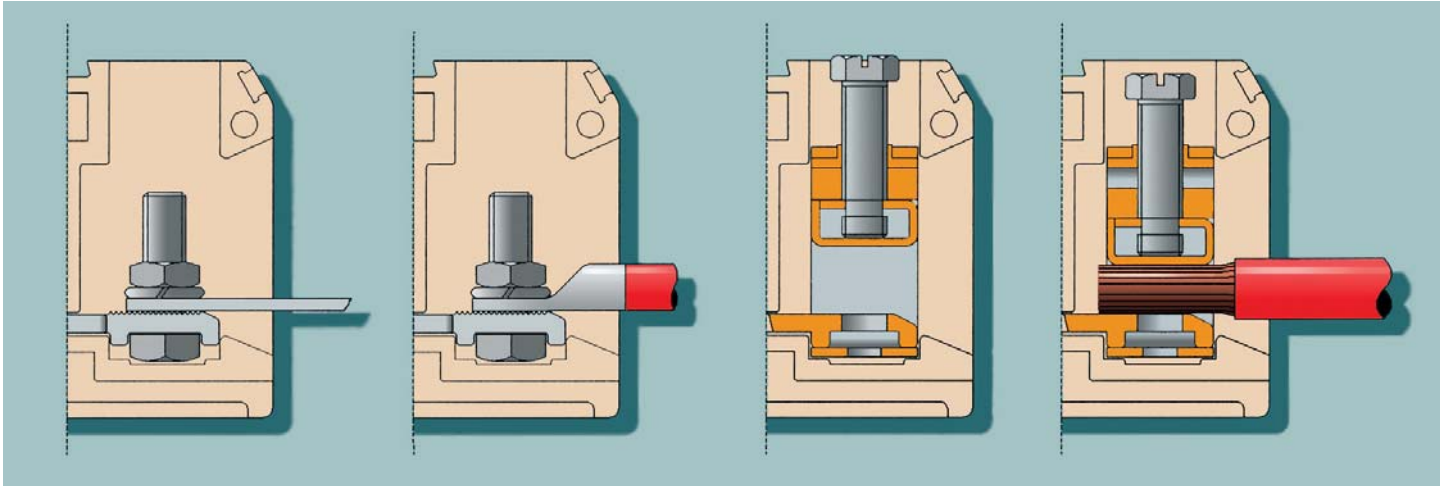

**easy cable insertion:**

in the wire clamping collar versions, the insertion of the conductor is eased by:

- sloping entrance planes on the insulating body
- the rounded shape of the pressure block
- chamfering on the conducting busbar
- adequate dimensioning of the conductor insertion hole.

To this regard, CDA terminal blocks offer a capacity greatly exceeding the indicated rated reference values, in fact the maximum conductors which can be effectively connected are:

- flexible:

**70 150 240 mm<sup>2</sup>**

- rigid:

**95 185 240 mm<sup>2</sup>**


**marking:**

CDA series terminal blocks are suited to be marked with CNU/8 or CSC (the latter system requires an ADR adapter).


The slots on the upper front side of each terminal block allow the insertion of further indication related to the entire terminal board.

**mounting:**

as these terminal blocks are suitable for the connection of very heavy and poorly ductile conductors, a fork-type locking pin has been inserted in the foot of the insulating body in order to grant major stability on the mounting rail. During mounting it is necessary to consider proper spacing for the fully unlocked pin.

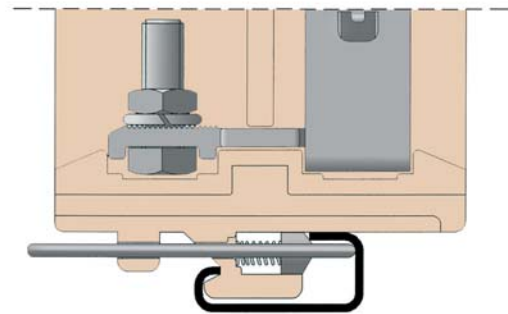

In case the mounting rail is placed on a flat surface, CDA terminal block dimensions require the use of a supporting bracket (ACI121213 type), in order to distance adequately the terminal board from the panel itself. For CDA.70, only one bracket is required, whilst two are requested for CDA.120 and CDA.185.

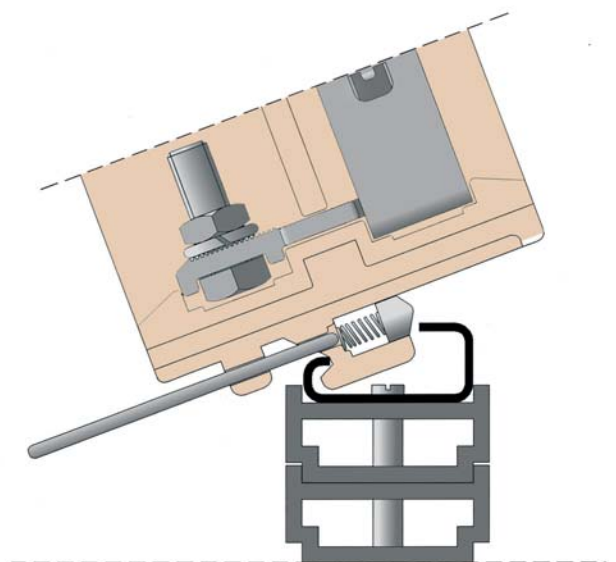



# CDA Series high current terminal blocks

## with melamine insulating body

- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type

### protection:

CDA terminal blocks can be further protected against direct and/or accidental contact by means of proper PRT type covers (of different sizes: medium or big) of self-extinguishing transparent material. These covers are supplied in standard length of 200 mm (corresponding to the total width of 4 adjoining blocks) and must be inserted on SPS supports, also of self-extinguishing material. PRT covers allow the protection of one side of the terminal block; the complete protection of the terminal board is obtained by two covers, which overlap once mounted.


- for terminal blocks type CDA.70 and 120

PRT/M+SPS/5

- for terminal blocks type CDA.185

PRT/M+SPS/7

PRT/G size must be used when the conductors come from the back of the board or, otherwise, when one or more connection points, not used, must be nevertheless protected.

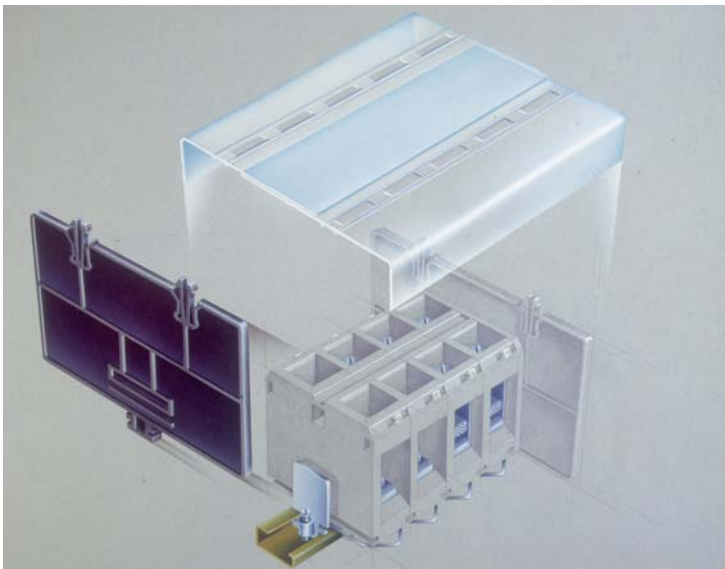

# CDA Series high current terminal blocks

with melamine insulating body



- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- **CESI 02 ATEX 163 U** Ex e certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +115 °C
- when rail assemblies are to be manufactured for explosive environments (Ex e), please see page A14

beige version	CDA.70/CC Cat. No. CD300	CDA.120/CC Cat. No. CD600	CDA.185/CC Cat. No. CD910
(Ex)i version			
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	feed-through	feed-through	feed-through
rated cross-section (mm <sup>2</sup> )	70	120	185
connecting capacity			
flexible (mm <sup>2</sup> )	2,5 ÷ 70	6 ÷ 150	6 ÷ 240
rigid (mm <sup>2</sup> )	2,5 ÷ 95	4 ÷ 185	4 ÷ 240
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 192 A / B11	800 V / 269 A / B13	800 V / 353 A / B15
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage  /  (V)	600 V / 175 A / 12-2/0 AWG / 88,5 lb.in	600 V / 255 A / 12-250 kcmil / 221 lb.in	600 V / 310 A / 10-350 kcmil / 265 lb.in
rated impulse withstand voltage / pollution degree	8 kV / 3	8 kV / 3	8 kV / 3
insulation stripping length (mm)	27	32	40
tightening torque value (test / max) (Nm)	3,5 / 6 (13 mm wrench)	4 / 10 (15 mm wrench)	- / 14 (17 mm wrench)
height / width / thickness  TH/35 7,5 mm	-	-	-
height / width / thickness  TH/35 15 mm	-	-	-
height / width / thickness  G32	83 / 83 / 27	101 / 96 / 32	117 / 110 / 38
	Terna LV 27/1 Enel Distribuzione DV 27/1	Terna LV 27/1 Enel Distribuzione DV 27/1	Terna LV 27/1 Enel Distribuzione DV 27/1
<b>APPROVALS</b>			
<b>ACCESSORIES</b>			
End sections	<b>CDA/70/PT</b> CD101	<b>CDA/120/PT</b> CD401	<b>CDA/185/PT</b> CD701
Clamping collar	<b>CDA/70/CO</b> CD102	<b>CDA/120/CO</b> CD402	<b>CDA/185/CO</b> CD703
Protection cover	<b>PRT/M</b> PRT02	<b>PRT/M</b> PRT02	<b>PRT/M</b> PRT02
Protection cover support	<b>SPS/5</b> SPS05	<b>SPS/5</b> SPS05	<b>SPS/7</b> SPS07
Mounting rail support	<b>ACI121213</b> Z121213	<b>ACI121213</b> Z121213	<b>ACI121213</b> Z121213
Marking tag printed or blank	<b>CNU/8/51</b> NU0851	<b>CNU/8/51</b> NU0851	<b>CNU/8/51</b> NU0851
End bracket	<b>CSC</b> (with ADR adapter) CS...	<b>CSC</b> (with ADR adapter) CS...	<b>CSC</b> (with ADR adapter) CS...
	<b>BTU</b> for PR/DIN and PR/3 BT005	<b>BTU</b> for PR/DIN and PR/3 BT005	<b>BTU</b> for PR/DIN and PR/3 BT005
	<b>CDA/BT</b> CD003	<b>CDA/BT</b> CD003	<b>CDA/BT</b> CD003
Mounting rail according to IEC 60715 Std.	<b>PR/DIN/AC</b> of steel PR001	<b>PR/DIN/AC</b> of steel PR001	<b>PR/DIN/AC</b> of steel PR001
	<b>PR/DIN/AS</b> same with slots PR004	<b>PR/DIN/AS</b> same with slots PR004	<b>PR/DIN/AS</b> same with slots PR004
	<b>PR/DIN/AL</b> of aluminium PR002	<b>PR/DIN/AL</b> of aluminium PR002	<b>PR/DIN/AL</b> of aluminium PR002
	-	-	-

# CDA Series high current terminal blocks

## with melamine insulating body



- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- **CESI 02 ATEX 163 U** Ex e certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +115 °C
- when rail assemblies are to be manufactured for explosive environments (Ex e), please see page A14

(\* the length indicated is the maximum length available for the relevant connection. By using bars and/or non-insulated cable-lugs, the rated insulation voltage is guaranteed respectively up to a width of: 17 mm (for the .70), 22 mm (for the .120), 28 mm (for the .185). For greater widths, a partition must be used

(\*\*) tightening: with a screwdriver / hex wrench

(\*\*\*) distance between the cable lug fixing screw axis and the conductor body: 10 mm


(\*\*\*) distance between the cable lug fixing screw axis and the conductor body: 12 mm

(\*\*\*) distance between the cable lug fixing screw axis and the conductor body: 15 mm

beige version	<b>CDA.70/BC</b> Cat. No. <b>CD200</b>	<b>CDA.120/BC</b> Cat. No. <b>CD500</b>	<b>CDA.185/BC</b> Cat. No. <b>CD810</b>
<b>(Ex)i version</b>			
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	feed-through	feed-through	feed-through
rated cross-section (mm <sup>2</sup> )	70	120	185
connecting capacity			
flexible (mm <sup>2</sup> )	2,5 ÷ 70	6 ÷ 150	6 ÷ 240
rigid (mm <sup>2</sup> )	2,5 ÷ 95	4 ÷ 185	4 ÷ 240
barre o capicorda (*)	21 mm max width (M8 bolt) (**)	25 mm max width (M10 bolt) (**)	30 mm max width (M12 bolt) (**)
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 192 A / B11	800 V / 269 A / B13	800 V / 353 A / B15
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage  /  (V)	600 V / 175 A / 12-2/0 AWG / 88,5 lb.in 630	600 V / 255 A / 12-250 kcmil / 221 lb.in 630	600 V / 310 A / 10-350 kcmil / 265 lb.in 630
rated impulse withstand voltage / pollution degree	8 kV / 3	8 kV / 3	8 kV / 3
insulation stripping length (mm)	27	32	40
coppia di serraggio / cavo (**)	3,5 / 6 (13 mm wrench)	4 / 10 (15 mm wrench)	- / 14 (17 mm wrench)
coppia di serraggio / barra (Nm)	- / 3 (13 mm wrench)	- / 6 (13 mm wrench)	- / 14 (19 mm wrench)
height / width / thickness  TH/35 7,5 mm	-	-	-
height / width / thickness  TH/35 15 mm	-	-	-
height / width / thickness  G32	83 / 83 / 27	101 / 96 / 32	117 / 110 / 38
<b>APPROVALS</b>			
<b>ACCESSORIES</b>	<b>Type</b>	<b>Type</b>	<b>Type</b>
End sections	<b>CDA/70/PT</b>	<b>CDA/120/PT</b>	<b>CDA/185/PT</b>
Clamping collar	<b>CDA/70/CO</b>	<b>CDA/120/CO</b>	<b>CDA/185/CO</b>
Protection cover	<b>PRT/M</b>	<b>PRT/M</b>	<b>PRT/M</b>
Protection cover support	<b>SPS/5</b>	<b>SPS/5</b>	<b>SPS/7</b>
Mounting rail support	<b>ACI121213</b>	<b>ACI121213</b>	<b>STP (***)</b>
Marking tag printed or blank	<b>CNU/8/51</b>	<b>CNU/8/51</b>	<b>CNU/8/51</b>
End bracket	<b>CSC</b> (with ADR adapter) <b>BTU</b> for PR/DIN and PR/3 <b>CDA/BT</b>	<b>CSC</b> (with ADR adapter) <b>BTU</b> for PR/DIN and PR/3 <b>CDA/BT</b>	<b>CSC</b> (with ADR adapter) <b>BTU</b> for PR/DIN and PR/3 <b>CDA/BT</b>
Mounting rail according to IEC 60715 Std.	<b>PR/DIN/AC</b> of steel <b>PR/DIN/AS</b> same with slots <b>PR/DIN/AL</b> of aluminium	<b>PR/DIN/AC</b> of steel <b>PR/DIN/AS</b> same with slots <b>PR/DIN/AL</b> of aluminium	<b>PR/DIN/AC</b> of steel <b>PR/DIN/AS</b> same with slots <b>PR/DIN/AL</b> of aluminium

# CDA Series high current terminal blocks

## with melamine insulating body

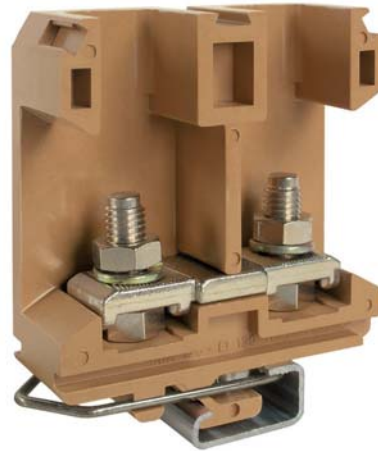


- UL94V-0 (5V)
- mounting onto PR/DIN type rails - according to IEC 60715 Std., "G32" type
- **CESI 02 ATEX 163 U** Ex e certificate  
I M2 / II 2 G D operating temperature range:  
-40 ÷ +115 °C
- when rail assemblies are to be manufactured for explosive environments (Ex e), please see page A14

(\*) the length indicated is the maximum length available for the relevant connection. By using bars and/or non-insulated cable-lugs, the rated insulation voltage is guaranteed respectively up to a width of: 17 mm (for the .70), 22 mm (for the .120), 28 mm (for the .185). For greater widths, a partition must be used

beige version	CDA.70/BB		CDA.120/BB		CDA.185/BB	
	Cat. No.	CD100	Cat. No.	CD400	Cat. No.	CD710
(Ex)i version						
<b>TECHNICAL CHARACTERISTICS</b>						
function / type	feed-through		feed-through		feed-through	
rated cross-section (mm <sup>2</sup> )	70		120		185	
connecting capacity	-		-		-	
flexible (mm <sup>2</sup> )	-		-		-	
rigid (mm <sup>2</sup> )	-		-		-	
barre o capicorda (*)	21 mm max width (M8 bolt) (***)		25 mm max width (M10 bolt) (***)		30 mm max width (M12 bolt) (***)	
rated voltage / rated current / gauge conf. to IEC 60947-7-1	800 V / 192 A / -		800 V / 269 A / -		800 V / 353 A / -	
rated voltage / rated current / AWG / tightening torque value UL (Ex e) rated voltage  /  (V)	600 V / 175 A / 12-2/0 AWG / 88,5 lb.in 630		600 V / 255 A / 12-250 kcmil / 221 lb.in 630		600 V / 310 A / 10-350 kcmil / 265 lb.in 630	
rated impulse withstand voltage / pollution degree	8 kV / 3		8 kV / 3		8 kV / 3	
insulation stripping length (mm)	-		-		-	
tightening torque value (test / max) (Nm)	- / 3 (13 mm wrench)		- / 6 (17 mm wrench)		- / 14 (19 mm wrench)	
height / width / thickness  TH/35 7,5 mm	-		-		-	
height / width / thickness  TH/35 15 mm	-		-		-	
height / width / thickness  G32	83 / 83 / 27		101 / 96 / 32		117 / 110 / 38	
<b>APPROVALS</b>						
<b>ACCESSORIES</b>						
End sections	<b>CDA/70/PT</b>	CD101	<b>CDA/120/PT</b>	CD401	<b>CDA/185/PT</b>	CD701
Clamping collar	<b>CDA/70/CO</b>	CD102	<b>CDA/120/CO</b>	CD402	<b>CDA/185/CO</b>	CD703
Protection cover	<b>PRT/M</b>	PRT02	<b>PRT/M</b>	PRT02	<b>PRT/M</b>	PRT02
Protection cover support	<b>SPS/5</b>	SPS05	<b>SPS/5</b>	SPS05	<b>SPS/7</b>	SPS07
Mounting rail support	<b>ACI121213</b>	Z121213	<b>ACI121213</b>	Z121213	<b>ACI121213</b>	Z121213
Marking tag printed or blank	<b>CNU/8/51</b>	NU0851	<b>CNU/8/51</b>	NU0851	<b>CNU/8/51</b>	NU0851
	<b>CSC</b> (with ADR adapter)	CS...	<b>CSC</b> (with ADR adapter)	CS...	<b>CSC</b> (with ADR adapter)	CS...
End bracket	<b>BTU</b> for PR/DIN and PR/3	BT005	<b>BTU</b> for PR/DIN and PR/3	BT005	<b>BTU</b> for PR/DIN and PR/3	BT005
	<b>CDA/BT</b>	CD003	<b>CDA/BT</b>	CD003	<b>CDA/BT</b>	CD003
Mounting rail according to IEC 60715 Std.	<b>PR/DIN/AC</b> of steel	PR001	<b>PR/DIN/AC</b> of steel	PR001	<b>PR/DIN/AC</b> of steel	PR001
	<b>PR/DIN/AS</b> same with slots	PR004	<b>PR/DIN/AS</b> same with slots	PR004	<b>PR/DIN/AS</b> same with slots	PR004
	<b>PR/DIN/AL</b> of aluminium	PR002	<b>PR/DIN/AL</b> of aluminium	PR002	<b>PR/DIN/AL</b> of aluminium	PR002
	-	-	-	-	-	-
	-	-	-	-	-	-

# Terminal boards for metering panels

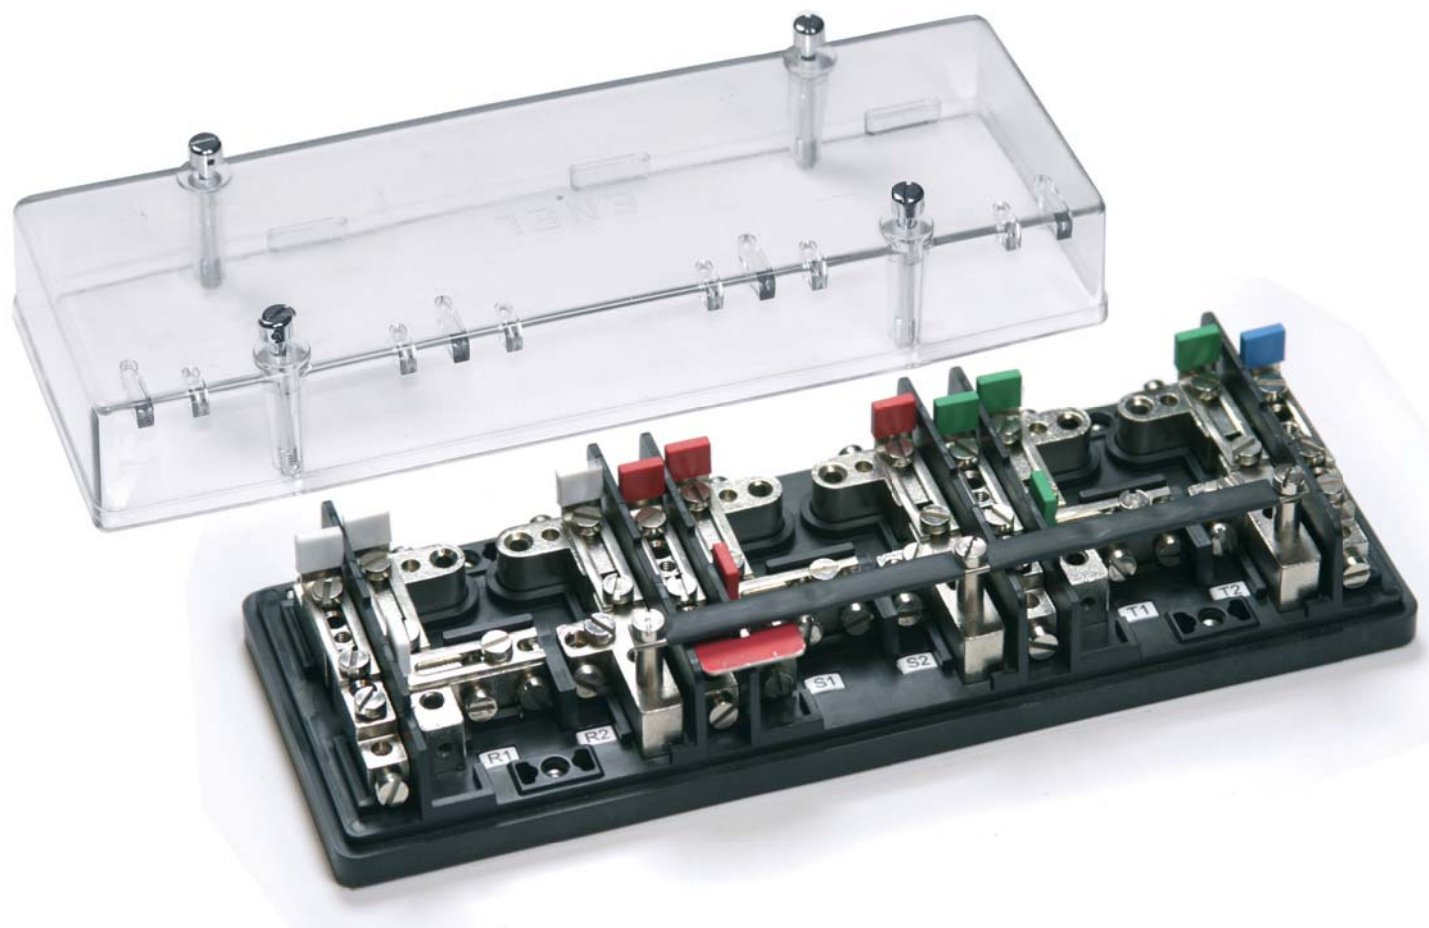

Cabur control terminal boards have been developed in order to enable electric power suppliers and users to easily check measuring instruments, without interrupting the current carrying circuits during the verification itself or during the replacement of the instruments.

Each terminal board is composed by an insulating body, carrying the copper zinc alloy terminals to which the ammeter, voltmeter circuits and the devices for disconnect and short circuit operations are connected. Each terminal board is supplied with a transparent cover (of cellulose acetate), provided with appropriate captive screws for the sealing of the assembly.

In two-phase and three-phase terminal boards, the insulating base is built from Kelon (an abbreviation of Ceramic + Nylon): this is a nylon 6 based, self-extinguishing UL94V-0 polymer with the addition of special ceramic spheres and subsequent thermal stability. The inclusion of the microspheres and the thermal procedure make the item extremely hardwearing (rigid, but also able to withstand impacts and wear and tear)

The current phases are marked in different colours, to be defined when ordering.

## TECHNICAL CHARACTERISTICS

rated cross-section	6 mm <sup>2</sup>
connecting capacity	
flexible conductors	0,5 ÷ 6 mm <sup>2</sup>
rigid conductors	0,5 ÷ 6 mm <sup>2</sup>
conductors insertion hole	Ø 4,1 (mm)
tightening torque	1,2 (Nm)
rated current (conf. to IEC 60947-7-1)	57 A
rated voltage (conf. to IEC 60947-7-1)	500 V
rated impulse withstand voltage / pollution degree	6 KV / 3

# MCM Series

The use of **MCM** series control terminal boards allows:

- 1) disconnection, upstream and downstream the measuring instruments
- 2) the insertion of a test instrument, downstream or upstream the measuring instruments
- 3) shunting, by means of common plugs, from the four connection terminals
- 4) voltage transmission from the beginning of the ammeter circuit to the disconnect slide-link by means of a simple cross connections.

In normal service, voltmeter leads are connected to the R-S-T terminals, whilst the ammeter leads, are to be inserted in the terminals identified R1-R2, S1-S2, T1-T2. The instruments are connected to terminals 1 and 2. The vertical slide-link cross connections are closed, the horizontal slide-link cross connections are open.

When inserting control instruments, the following instructions are to be followed:

- by means of normal plugs, the voltmeter leads must be shunted from the test instrument on to the voltage sockets of the disconnect slide-link or to the insertion blocks of the fuse-holders;
- the ammeter leads of the test instruments must be inserted in sockets 1 ad R1 or 2 ad R2; same procedure is to be followed for the other phases;
- therefore, the corresponding vertical slide-link must be disconnected.

If there is a need to replace a measuring instrument, it is necessary to previously close the horizontal slide-links, disconnect the vertical slide-links and open the slide-link.

Feeding conductors (incoming and outgoing) are inserted from the rear of the terminal board, with conductors passing through slots on the insulating base of the terminal board.

for single-phase connected electric power meters

## MCM.1





Overall dimension (with cover)  
**MCM.1:** 95 x 85 x 48 mm

**ENEL** in order to identify phases, has adopted a particular colour convention, based on the sections where terminal blocks are installed.  
From the left, phases are identified as follows:

Type	Cat. No.
<b>MCM.1/B</b> (white)	<b>MC201B</b> (adopted in Campania and Lombardy)
<b>MCM.1/G</b> (yellow)	<b>MC201G</b> (adopted in Veneto and Trentino Alto Adige)
<b>MCM.1/R</b> (red)	<b>MC201R</b> (adopted in the rest of Italy)

Application scheme

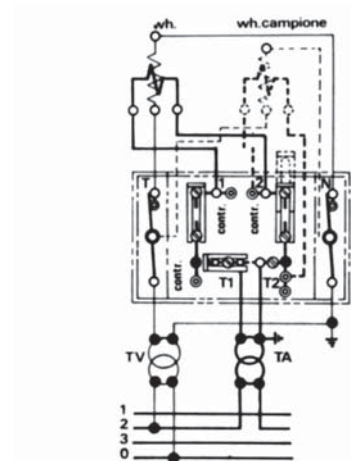


Fixing template

# MCM Series

for ARON connected electric power meters


## MCM.2

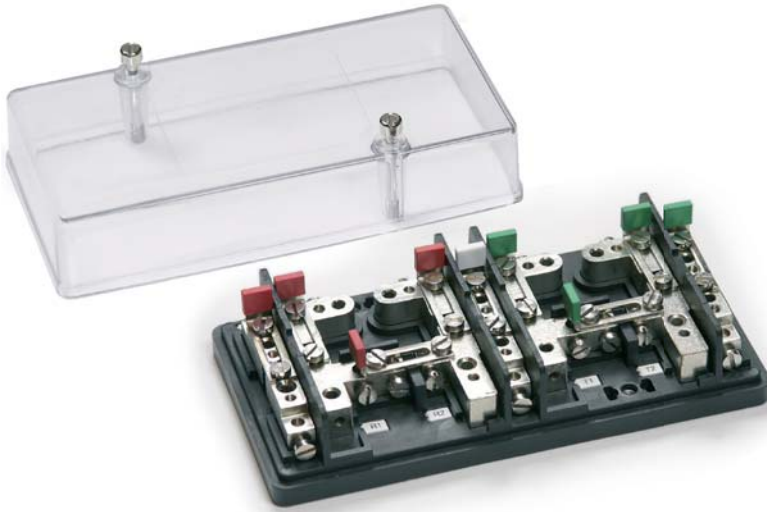


Overall dimension (with cover)  
**MCM.2:** 170 x 85 x 48 mm

ENEL in order to identify phases, has adopted a particular colour convention, based on the sections where terminal blocks are installed.  
 From the left, phases are identified as follows::

Type	Cat. No.
<b>MCM.2/B</b> (white)	<b>MC202B</b> (adopted in Campania and Lombardy)
<b>MCM.2/G</b> (yellow)	<b>MC202G</b> (adopted in Veneto and Trentino Alto Adige)
<b>MCM.2/R</b> (red)	<b>MC202R</b> (adopted in the rest of Italy)

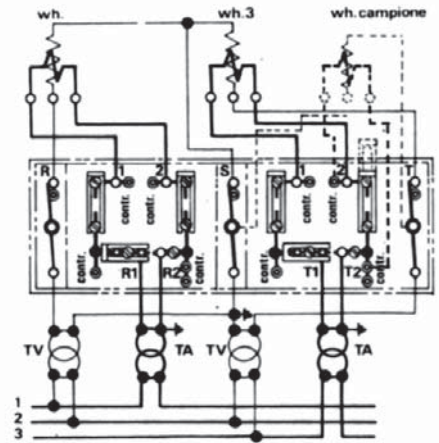


Application scheme

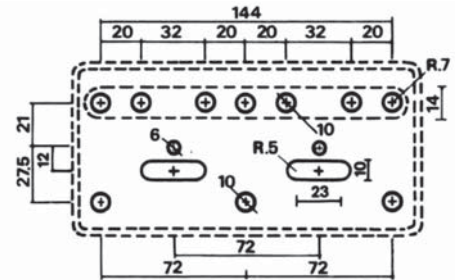

Fixing template

for three-phase + neutral connected electric power meters


## MCM.3

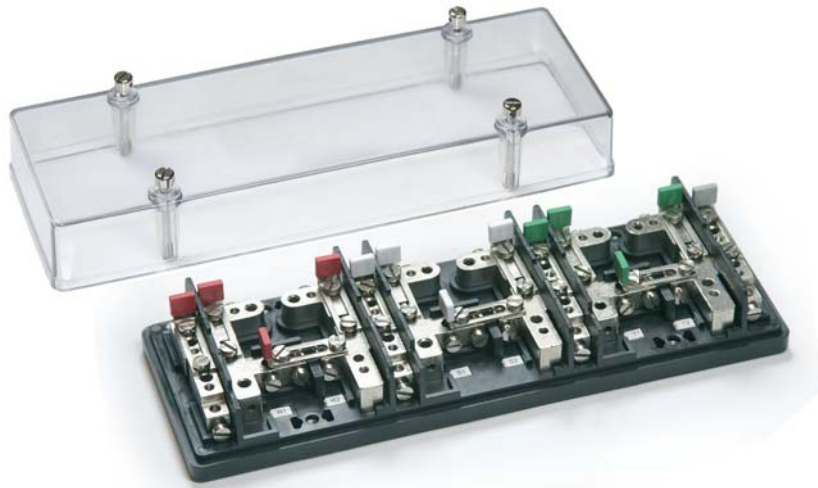


Overall dimension (with cover)  
**MCM.1:** 95 x 85 x 48 mm

ENEL in order to identify phases, has adopted a particular colour convention, based on the sections where terminal blocks are installed.  
 From the left, phases are identified as follows:

Type	Cat. No.
<b>MCM.3/B</b> (white)	<b>MC203B</b> (adopted in Campania and Lombardy)
<b>MCM.3/G</b> (yellow)	<b>MC203G</b> (adopted in Veneto and Trentino Alto Adige)
<b>MCM.3/R</b> (red)	<b>MC203R</b> (adopted in the rest of Italy)

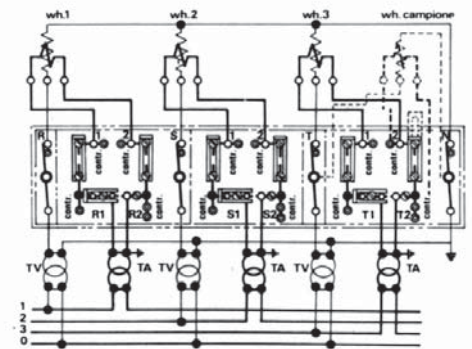

Application scheme

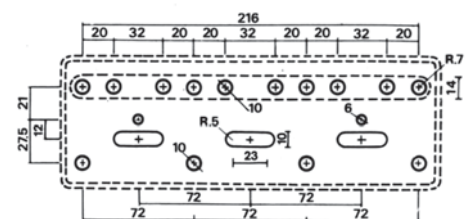


Fixing template

# MCM Series

for three-phase + neutral  
connected electric power meters


## MCM.3/VE

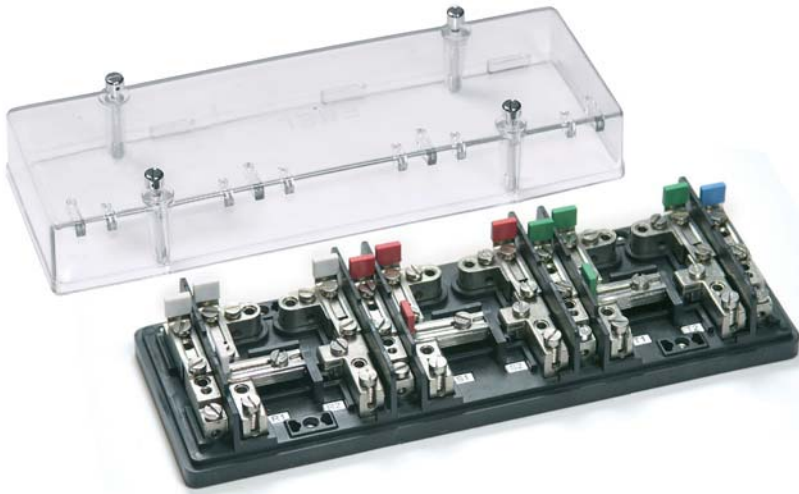


Overall dimension (with cover)  
MCM.3/VE: 245 x 85 x 48 mm

**ENEL** in order to identify phases, has adopted a particular colour convention, based on the sections where terminal blocks are installed.  
From the left, phases are identified as follows:

Type	Cat. No.
MCM.3/VE/B (white)	MC233B (adopted in Campania and Lombardy)
MCM.3/VE/G (yellow)	MC233G (adopted in Veneto and Trentino Alto Adige)
MCM.3/VE/R (red)	MC233R (adopted in the rest of Italy)

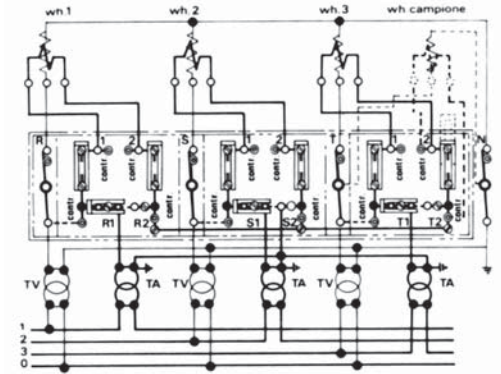

Application scheme

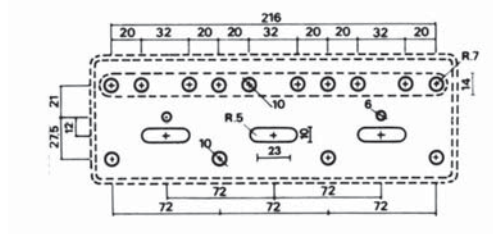

Fixing template

# MCT/SA Series

MCT/SA series differs from MCM series in that:


- 1) feeding conductors (incoming and outgoing) are inserted frontally instead from the rear of the terminal board, with conductors passing through slots on the upper and lower sides of the cover
- 2) the cover is provided with safety locks that prevent the closing if the slide-links are not in the correct position. The employment specifications of MCT/SA terminal boards are identical to those given for MCM series.



# MCT/SA Series

for single-phase connected electric power meters


## MCT.1/SA

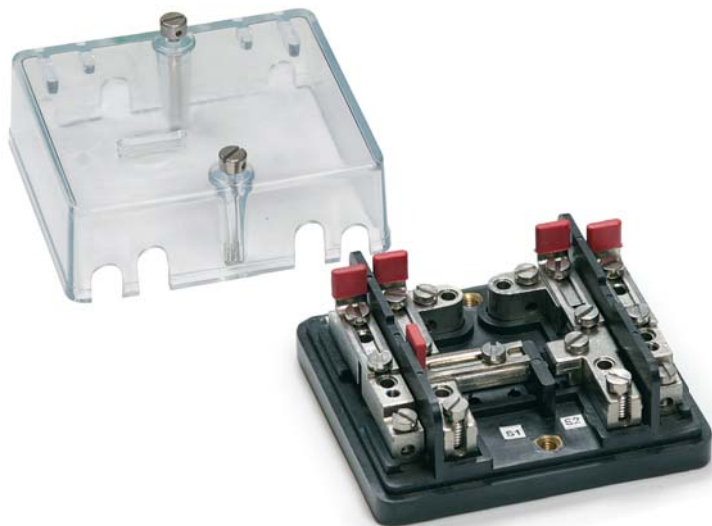


Overall dimension (with cover)  
**MCT.1/SA:** 95 x 85 x 48 mm

ENEL in order to identify phases, has adopted a particular colour convention, based on the sections where terminal blocks are installed.  
 From the left, phases are identified as follows:

Type	Cat. No.
<b>MCT.1/SA/B</b> (white)	<b>MC401B</b> (adopted in Campania and Lombardy)
<b>MCT.1/SA/G</b> (yellow)	<b>MC401G</b> (adopted in Veneto and Trentino Alto Adige)
<b>MCT.1/SA/R</b> (red)	<b>MC401R</b> (adopted in the rest of Italy)

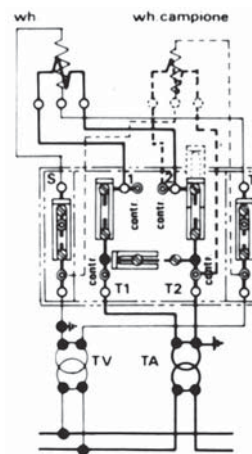

Application scheme



Fixing template

for ARON connected electric power meters


## MCT.2/SA




Overall dimension (with cover)  
**MCT.2/SA:** 170 x 85 x 48 mm

ENEL in order to identify phases, has adopted a particular colour convention, based on the sections where terminal blocks are installed.  
 From the left, phases are identified as follows:

Type	Cat. No.
<b>MCT.2/SA/B</b> (white)	<b>MC402B</b> (adopted in Campania and Lombardy)
<b>MCT.2/SA/G</b> (yellow)	<b>MC402G</b> (adopted in Veneto and Trentino Alto Adige)
<b>MCT.2/SA/R</b> (red)	<b>MC402R</b> (adopted in the rest of Italy)

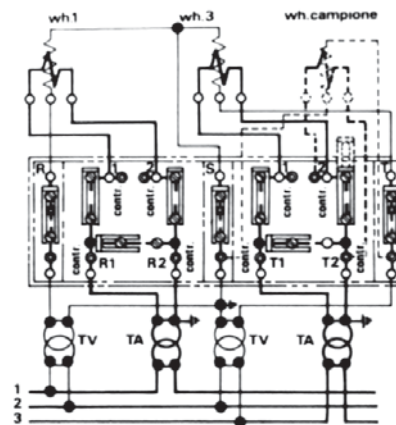

Application scheme

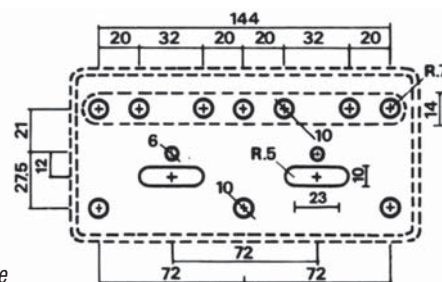


Fixing template

# MCT/SA Series

for three-phase + neutral  
connected electric power meters


**MCT.3/SA**

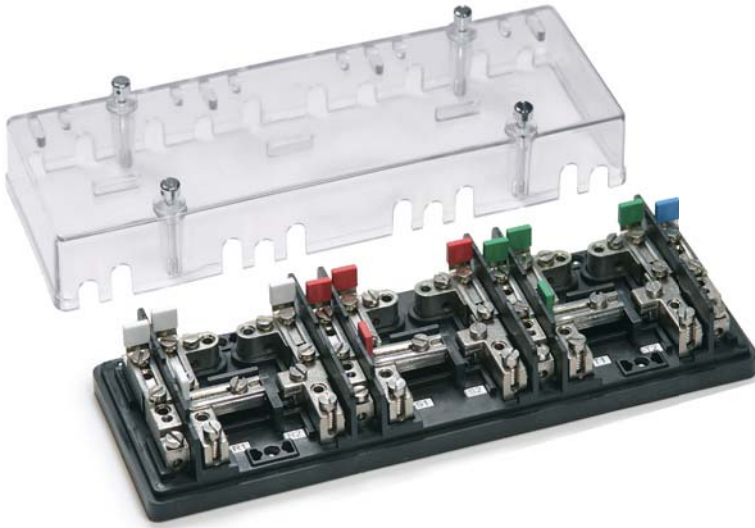


Overall dimension (with cover)  
MCT.3/SA: 245 x 85 x 48 mm

ENEL in order to identify phases, has adopted a particular colour convention, based on the sections where terminal blocks are installed.  
From the left, phases are identified as follows:

Type	Cat. No.
MCT.3/SA/B (white)	MC403B (adopted in Campania and Lombardy)
MCT.3/SA/G (yellow)	MC403G (adopted in Veneto and Trentino Alto Adige)
MCT.3/SA/R (red)	MC403R (adopted in the rest of Italy)

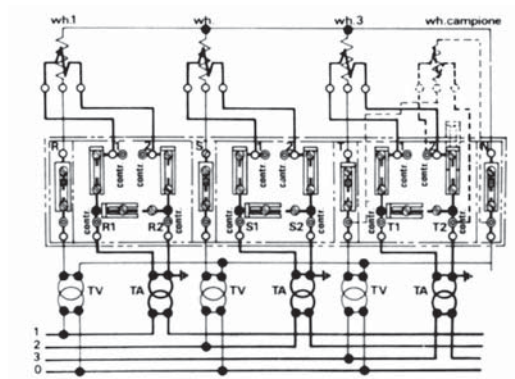


Application scheme

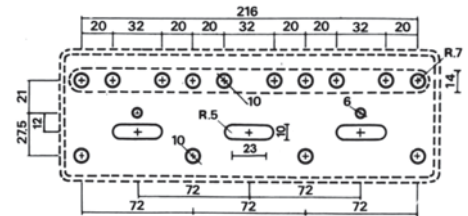


Fixing template

## SDN neutral busbar supports

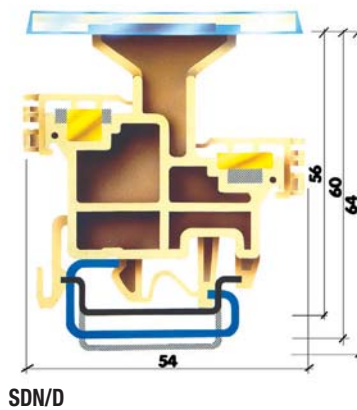

SDN/D

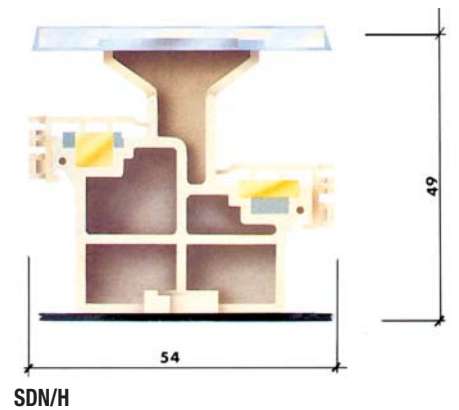


SDN/H

**SDN/D** (Cat. No. SD200)  
to be mounted on rails according to IEC 60715 Std.


**SDN/H** (Cat. No. SD300)  
to be screwed directly on panel

- support pitch: 20 mm
- both types are suited for 6 x 6 mm or 10 x 3 mm busbars
- **insulating body:** of beige polyamide (RAL 1001); KC 600 degree tracking resistance, UL94V-0 self-extinguishing degree. Temperature range: between - 30°C and +110°C. Provided with two housing for the marking compositions of letters or numbers (up to 3 figures), by means of CSC tags, and card holders with transparent protection for identification inscription.

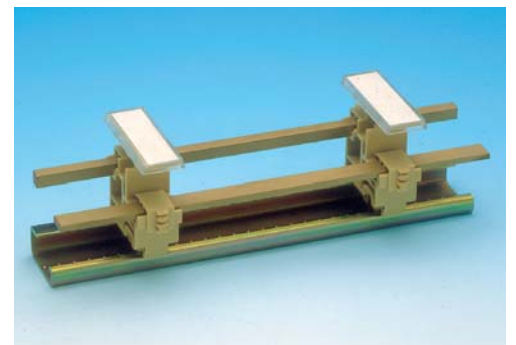

# MS.8x10 disconnect terminal board

8-poles, 4 ammetric and 4 voltmetric

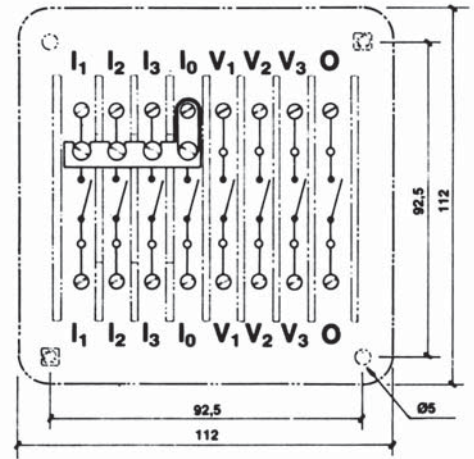

**MS/8x10/N**

Cat. No.

**MZ300N**

## TECHNICAL CHARACTERISTICS

rated cross-section	10 mm <sup>2</sup>
connecting capacity	
flexible conductors	0,5 ÷ 16 mm <sup>2</sup>
conductors insertion hole	5 x 10 (mm)
test tightening torque	120 (Ncm)
rated current (conf. to IEC 60947-7-1)	57 A
rated voltage (conf. to IEC 60947-7-1)	500 V
rated impulse withstand voltage / pollution degree	6 KV / 3
thickness (with cover, including screws)	52 / 65 mm

**Insulating body:** of green polycarbonate, filled with fibreglass.

**Conductor body:** components of copper-zinc alloy with high percentage of copper and provided with nickel plating.

**Cover:** of black polyamide.

On request, the terminal board can be supplied according to different electrical schemes.

A version with cover in transparent cellulose acetate is available.

**Type**

**Cat. No.**

**MS/8x10/T**

**MZ300T**



Cat. No. **MZ300N**  
(black cover)



Cat. No. **MZ300T**  
(transparent cover)

# QBLOK series




## Applications

Distribution terminal boards are used as supplementary terminal boards for phase or neutral expansion inside electrical panels. They are also called equipotential terminal boards since they are used as equipotential nodes in distribution control units to house the earthing system.

## General characteristics

- Configuration, with 7 and 12 holes
- Mounting onto PR/3, type "TH/35 " rails according to IEC 60715 Std.
- Intrinsically IPXXB protected according to IEC 60529 Std.
- Marking possibility with CNU/8 or CNU/10 tags on each busbar
- Available in green and blue
- Insulating in polyamide 6.6 UL94V-0

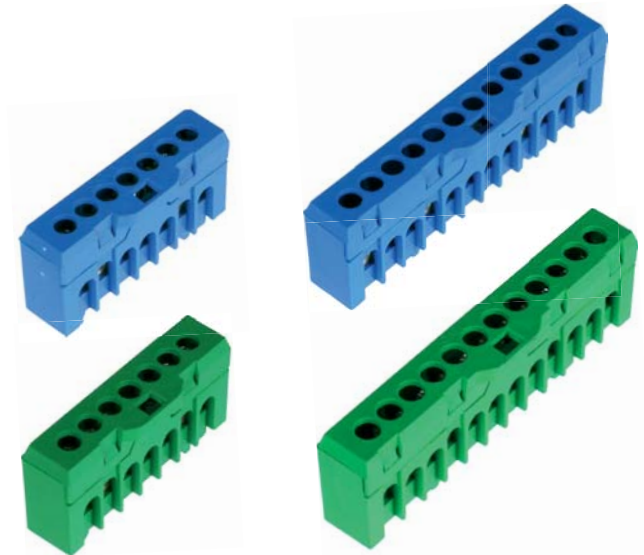

Blue version	
Green version	
height / width / thickness	TH/35 7,5 mm
height / width / thickness	TH/35 15 mm
TECHNICAL CHARACTERISTICS	
function / type	Distribution terminal boards
number and diameter of holes	7 holes ø 5,3 mm
sezione nominale	10 (mm <sup>2</sup> )
connecting capacity:	
flexible	1,5 ÷ 10 (mm <sup>2</sup> )
rigid	1,5 (mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	10 - WP100/21
rated voltage / rated current / gauge	500 V / 63 A / B5 conf. to IEC 60947-1
rated impulse withstand voltage / pollution degree	-
insulation stripping length	6 (mm)
tightening torque value (test / max)	2 / 2,5 Nm

QBLOK.7/BLU	
Cat. No. QBLOK7001	
QBLOK.7/TE	
Cat. No. QBLOK7002	
height / width / thickness	33 / 53 / 16
height / width / thickness	41 / 53 / 16
function / type	Distribution terminal boards
number and diameter of holes	7 holes ø 5,3 mm
sezione nominale	10 (mm <sup>2</sup> )
connecting capacity:	
flexible	1,5 ÷ 10 (mm <sup>2</sup> )
rigid	1,5 (mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	10 - WP100/21
rated voltage / rated current / gauge	500 V / 63 A / B5
rated impulse withstand voltage / pollution degree	-
insulation stripping length	6 (mm)
tightening torque value (test / max)	2 / 2,5 Nm

QBLOK.12/BLU	
Cat. No. QBLOK1201	
QBLOK.12/TE	
Cat. No. QBLOK1202	
height / width / thickness	33 / 85 / 16
height / width / thickness	41 / 85 / 16
function / type	Distribution terminal boards
number and diameter of holes	12 holes ø 5,3 mm
sezione nominale	10 (mm <sup>2</sup> )
connecting capacity:	
flexible	1,5 ÷ 10 (mm <sup>2</sup> )
rigid	1,5 (mm <sup>2</sup> )
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	10 - WP100/21
rated voltage / rated current / gauge	500 V / 63 A / B5
rated impulse withstand voltage / pollution degree	-
insulation stripping length	6 (mm)
tightening torque value (test / max)	2 / 2,5 Nm

## APPROVALS

IMQ pending

IMQ pending

ACCESSORIES	
Marking tag	printed or blank
End bracket	
Mounting rail	
according to IEC 60715 Std.	

Type	Cat. No.
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> same with slots	PR005

Type	Cat. No.
<b>CNU/8/51</b>	NU0851
<b>BTU</b> for PR/DIN and PR/3	BT005
<b>BT/3-BTO</b> for PR/3 only	BT003-BT007
<b>PR/3/AC</b> of steel	PR003
<b>PR/3/AS</b> idem con asole	PR005

# POLM series

## Applications

Distribution terminal boards are used as supplementary terminal boards for phase or neutral expansion inside electrical panels. They are also called equipotential terminal boards since they are used as equipotential nodes in distribution control units to house the earthing system.

- Fixing: DIN rail or panel-mount with screws
- Rated voltage 500V according to IEC 60947-7-1 Std.
- Conforming to EU Low voltage Directive 2006/95/EC

## Materials

- CW 614N Brass
- Zinc-plated steel screws with combined single-slot and Phillips heads

## General characteristics

- Protected terminal boards with 7,11, and 15 holes

CAT. NO.	TYPE	COLOUR	RATED CROSS-SECTION (mm <sup>2</sup> )	RATED CURRENT	NUMBER OF HOLES
QPOL1203	POLM.1215	Grey	12 x 1,5 2 x 2,5 1 x 16	80 A	The 16mm <sup>2</sup> diameter hole is screw-clamped type
QPOL1204	POLM.1215/TE	Blue	12 x 1,5 2 x 2,5 1 x 16	80 A	The 16mm <sup>2</sup> diameter hole is screw-clamped type
QPOL1205	POLM.1215/BLU	Green	12 x 1,5 2 x 2,5 1 x 16	80 A	The 16mm <sup>2</sup> diameter hole is screw-clamped type
QPOL7005	POLM.7/TRA	Transparent	1,5-10,0	57 A	7
QPOL1105	POLM.11/TRA	Transparent	1,5-10,0	57 A	11
QPOL1505	POLM.15/TRA	Transparent	1,5-10,0	57 A	15



Spring clamp



Spring clamp



Spring clamp



# QBLOK series



## Applications

Distribution terminal boards

## General characteristics

- Four pole configuration, with 2  $\varnothing$  7,5 mm holes and 5  $\varnothing$  5,4 mm holes
- Mounting onto PR/3, type "TH/35 " rails according to IEC 60715 Std. or directly onto the panel
- Insulating supports in polyamide 6.6 and insulating cover in polycarbonate - UL94V-0 grade
- Insulating cover on each conducting body
- Feeding inputs in staggered position for easier conductor connection
- Marking possibility with CNU/8 or CNU/10 tags on each busbar
- IMQ approval in conformity to EN 60947-7-1 Std.



VERSION	QBLOK4P100A7 Cat. No. QBLOK4100	QBLOK4P125A11 Cat. No. QBLOK4125	QBLOK4P125A15 Cat. No. QBLOK4126
height / width / thickness	TH/35 7,5 mm	52 / 97 / 108	52 / 97 / 137
height / width / thickness	TH/35 15 mm	59 / 97 / 108	59 / 97 / 137
TECHNICAL CHARACTERISTICS			
function / type	Distribution 4-pole terminal board	Distribution 4-pole terminal board	Distribution 4-pole terminal board
number and diameter of holes	2 holes $\varnothing$ 7.5 mm + 5 holes $\varnothing$ 5.4 mm	2 holes $\varnothing$ 9 mm + 2 holes $\varnothing$ 7,5 mm + 7 holes $\varnothing$ 5.4 mm	2 holes $\varnothing$ 9 mm + 2 holes $\varnothing$ 7,5 mm + 11 holes $\varnothing$ 5,4 mm
rated cross-section (mm <sup>2</sup> )	25	35	35
connecting capacity (hole $\varnothing$ 9 mm):			
flexible (mm <sup>2</sup> )		10 ÷ 35	10 ÷ 35
rigid (mm <sup>2</sup> )		10 ÷ 35	10 ÷ 35
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type		25 - WP 250/29	25 - WP 250/29
connecting capacity (hole $\varnothing$ 9 mm):			
flexible (mm <sup>2</sup> )	10 ÷ 25	10 ÷ 25	10 ÷ 25
rigid (mm <sup>2</sup> )	10 ÷ 25	10 ÷ 25	10 ÷ 25
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	16 - WP160/22	16 - WP 160/22	16 - WP 160/22
connecting capacity (hole $\varnothing$ 5,4 mm):			
flexible (mm <sup>2</sup> )	2,5 ÷ 6	2,5 ÷ 6	2,5 ÷ 6
rigid (mm <sup>2</sup> )	2,5 ÷ 6	2,5 ÷ 6	2,5 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16	4 - WP 40/16	4 - WP 40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	500 V / 100 A / -	500 V / 125 A / -	500 V / 125 A / -
Short-time withstand current (Icw) conf. to IEC 60947-7-1	3 kA (r.m.s value x 1s)	3 kA (r.m.s value x 1s)	3 kA (r.m.s value x 1s)
rated impulse withstand voltage / pollution degree	8 kV / 3	-	-
insulation stripping length (mm)	13	13	13
tightening torque value (test / max) (Nm)	1,8 / 2,2 Nm	1,8 / 2,2 Nm	1,8 / 2,2 Nm

## APPROVALS



ACCESSORIES	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.	
Marking tag	printed or blank	CNU/8/51/... CNU/10/51/...	NU0851... NU1051...	CNU/8/51/... CNU/10/51/...	NU0851... NU1051...	CNU/8/51/... CNU/10/51/...	NU0851... NU1051...
End bracket		BTU for PR/DIN and PR/3 BT/3-BTO for PR/3 only	BT005 BT003-BT007	BTU for PR/DIN and PR/3 BT/3-BTO for PR/3 only	BT005 BT003-BT007	BTU for PR/DIN and PR/3 BT/3-BTO for PR/3 only	BT005 BT003-BT007
Mounting rail according to IEC 60715 Std.		PR/3/AC in acciaio PR/3/AS idem con asole	PR003 PR005	PR/3/AC in acciaio PR/3/AS idem con asole	PR003 PR005	PR/3/AC in acciaio PR/3/AS idem con asole	PR003 PR005

# POLM/N series


## Distribution terminal boards

### General characteristics


- Fixing: EN 50022 rail or panel-mount
- Insulating screen on each brass busbar
- Holes specially staggered for better cabling of the conductors
- IMQ certificate (extension) and conformity to EU 2006/95/EC Low Voltage Directive

### Materials

- CW 614N Brass
- Zinc-plated steel screws with combined single-slot and Phillips heads
- Transparent polycarbonate

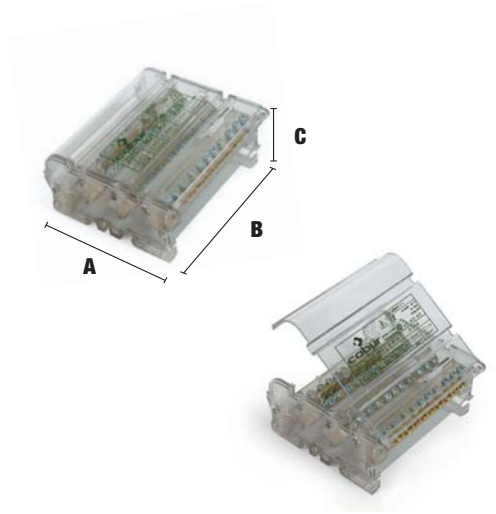

CAT. NO.	TYPE	DIAMETER OF BAR HOLES (mm)	BAR NUMBER	I MAX	V MAX	PACKAGE	A (mm)	B (mm)	C (mm)
QPOL2100N	POLM.2/100/N	5,0 x 5,5 2,0 x 7,5	2	100 A	500V	4	47,0	69,0	50,0
QPOL2125N	POLM.2/125/N	7,0 x 5,4 2,0 x 7,5 2,0 x 9,0	2	125 A	500V	2	47,0	106,0	50,0
QPOL2126N	POLM.2/126/N	11,0 x 5,4 2,0 x 7,5 2,0 x 9,0	2	125 A	500V	2	47,0	106,0	50,0
QPOL4160S	POLM.4/160/S	6,0 x 6,5 2,0 x 8,5 1,0 x 11,0	4	160 A	500V	1	87,0	135,0	52,0
QPOL4161N	POLM.4/161/N	9,0 x 6,5 4,0 x 8,5 1,0 x 11,0	4	160 A	500V	1	88,0	182,0	55,0

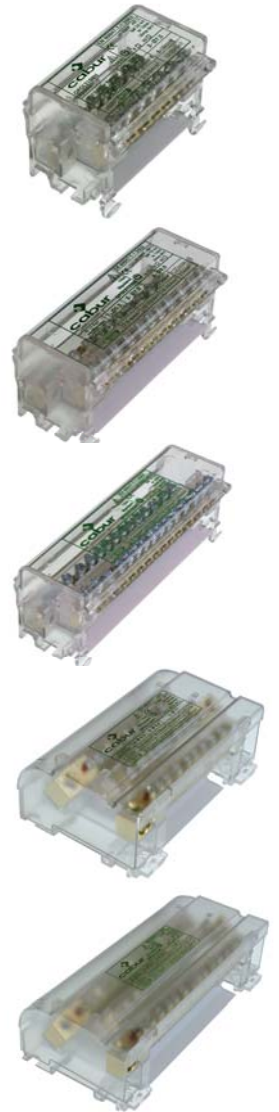

# CONTC series

## Applications

The terminals of the CONTC Series are mainly used inside junction boxes and, from a physical standpoint, can be considered as simple Kirchhoff's nodes.




## General characteristics

- Maximum withstand temperature: 130 °C
- Degree of protection: IPXXB according to IEC 60529 Std.
- High dielectric strength
- Resistance to tracking currents
- Screw-clamp



## Materials

- These products comply with the essential requirements of the EU 2006/95/EC Low Voltage Directive
- CW 614N Brass
- Zinc-plated screws and dowels
- Transparent polycarbonate



CAT. NO.	TYPE	QUANTITY PER PACKAGE	RATED CROSS-SECTION (mm <sup>2</sup> )	RATED CURRENT	RIGID OR FLEXIBLE CONDUCTORS		RATED VOLTAGE	SCREW CLAMP	DIMENSIONS (mm)			
					CONDUCTOR CROSS-SECTION (mm <sup>2</sup> )	CONDUCTORS NO.			NUMBER OF POLES	A	B	C
CONTC01	CONTC/1,5	10	1,5	17,5A	1,5	2	450V	10	16,0	3,3	10,0	15,0
					1,0	2-3						
					0,75	2-4						
CONTC02	CONTC/2,5	10	2,5	24A	2,5	2	450V	10	17,6	3,7	8,4	17,6
					1,5	2-3						
					1,0	2-4						
CONTC04	CONTC/4	10	4,0	32A	4,0	2	450V	10	21,0	4,5	10,5	21,0
					2,5	2-3						
					1,5	2-4						
CONTC06	CONTC/6	10	6,0	41A	6,0	2	500V	10	23,0	5,6	11,5	22,5
					4,0	2-3						
					2,5	2-4						
CONTC10	CONTC/10	5	10,0	57A	10,0	2	500V	10	28,0	6,9	14,6	26,0
					6,0	2-3						
					4,0	2-4						
CONTC16	CONTC/16	5	16,0	76A	16,0	2	500V	10	33,0	9,0	19,7	31,0
					10,0	2-3						
					6,0	2-4						
CONTC25	CONTC/25	5	25,0	101A	25,0	2	500V	1	39,0	12,0	22,0	38,0
					16,0	2-3						
					10,0	2-4						
CONTC35	CONTC/35	5	35,0	125A	35,0	2	500V	1	46,0	14,0	25,0	44,0
					25,0	2-3						
					16,0	2-4						



# CONT series


## Applications

The terminals of the CONTC Series are mainly used inside junction boxes and, from a physical standpoint, can be considered as simple Kirchhoff's nodes.




## General characteristics


- CW 614N Brass
- Zinc-plated screws and dowels
- Transparent polycarbonate
- Maximum withstand temperature: 130 °C
- High dielectric strength
- Screw-clamp

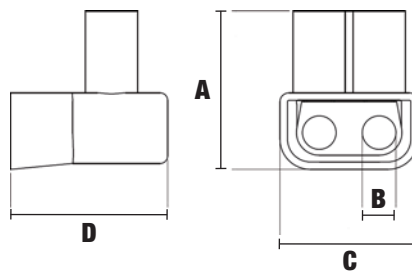

CAT. NO.	TYPE	QUANTITY CF	RATED CROSS-SECTION (mm <sup>2</sup> )	RATED VOLTAGE	SCREW-CLAMP	DIMENSIONS (mm)			
						A	B	C	D
CONT206	CONTC/2/6	100	6,0	450V	2	17,0	4,0	15,0	18,0
CONT216	CONTC/2/16	50	16,0	450V	2	24,5	6,0	20,0	25,0
CONT225	CONTC/2/25	40	25,0	450V	2	26,0	7,5	23,5	29,0
CONT235	CONTC/2/35	20	35,0	450V	2	29,5	9,5	32,0	32,0



CAT. NO.	TYPE	QUANTITY CF	RATED CROSS-SECTION (mm <sup>2</sup> )	RATED VOLTAGE	SCREW-CLAMP	DIMENSIONS (mm)			
						A	B	C	D
CONT306	CONTC/3/6	5	6,0	500V	3	22,5	4,5	29,0	19,0
CONT316	CONTC/3/16	5	16,0	500V	3	26,0	6,0	33,5	22,5
CONT325	CONTC/3/25	5	25,0	500V	3	30,0	7,5	40,0	27,0



CAT. NO.	TYPE	QUANTITY CF	(mm <sup>2</sup> ) RATED CROSS-SECTION	RATED VOLTAGE	SCREW-CLAMP	DIMENSIONS (mm)			
						A	B	C	D
CONT506	CONTC/5/6	10	6,0	500V	5	22,5	4,5	45,0	19,0
CONT516	CONTC/5/16	5	16,0	500V	5	26,0	6,0	52,0	22,5
CONT525	CONTC/5/25	5	25,0	500V	5	31,0	7,5	62,0	22,5

# CAMUT series

## 12-pole terminal strips




### General characteristics

- Maximum withstand temperature: 80 °C
- Neutral colour

### Materials

- Brass
- PA6 Polyamides
- Zinc-plated steel screws

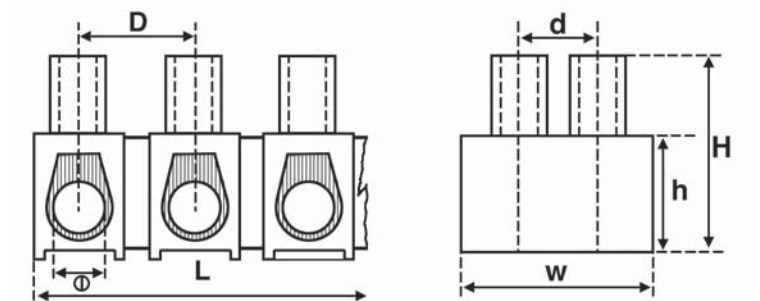

CAT. NO.	TYPE	RATED CURRENT	CROSS-SECTION (mm <sup>2</sup> )	GAUGE	DIMENSIONS (mm)						
					L	W	Ø	D	d	H	h
Cod. CAMUT02	CAMUT.12/02	3A	2,5	A3	93,0	17,0	2,8	8,0	6,0	13,7	8,0
Cod. CAMUT04	CAMUT.12/04	5A	4,0	A3	117,0	19,0	3,3	9,8	6,5	15,9	9,0
Cod. CAMUT06	CAMUT.12/06	10A	6,0	A4	132,0	21,0	4,2	11,0	7,8	16,8	10,0
Cod. CAMUT10	CAMUT.12/10	15A	10,0	A5	141,0	23,0	4,5	11,7	8,5	19,0	10,8
Cod. CAMUT16	CAMUT.12/16	30A	16,0	B6	168,0	26,0	5,5	14,5	9,5	20,4	12,0
Cod. CAMUT25*	CAMUT.12/25	60A	25,0	B6	191,0	29,7	6,6	16,5	11,0	25,9	15,5
Cod. CAMUT35	CAMUT.12/35	80A	35,0	B6	207,0	36,5	7,0	18,0	14,0	30,0	19,0

\* *Until sell-out*



# Copper bar supports

## Applications



The SUPP/5400 support allows rapid and secure fixing of copper busbars for power distribution. The different dimensions of the busbars perfectly adapt to the SUPP/5400 support, by simply rotating the closing cover which has different sized grooves for the immediate fixing of any of the four different busbars indicated in the table. The last columns of the table indicate the support c-to-c (distance between centers) distances necessary in function of the maximum rated current and the maximum allowable short circuit current.

## General characteristics

- Loads from 160A to 400A
- Equipped for insertion of the earthing bar, if necessary, in the 5 x 15 mm<sup>2</sup> and 5 x 20 mm<sup>2</sup> cross-sections
- Moulded in self-extinguishing plastic in compliance with UL94
- Can be mounted on rail or on panel

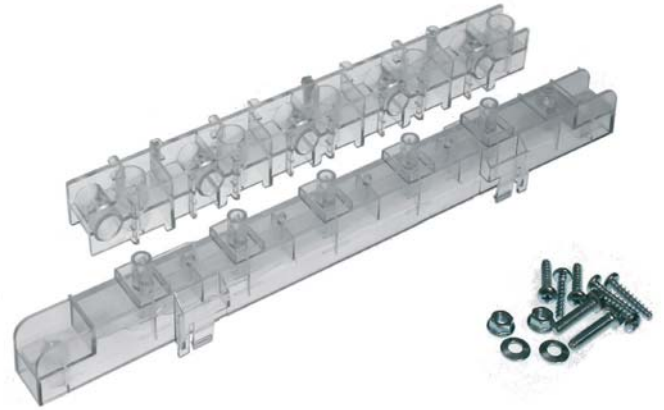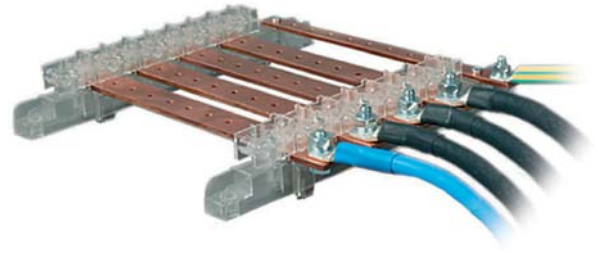


CAT. NO.	TYPE	CORRENT	DIMENSIONS	SHORT CIRCUIT CURRENT	
				5000V	10000V
CSBR5400	SUPP/5400	160A	5,0 x 15,0	500,0 mm	450,0 mm
		250A	5,0 x 20,0	750,0 mm	450,0 mm
		320A	5,0 x 25,0	750,0 mm	450,0 mm
		400A	5,0 x 32,0	750,0 mm	450,0 mm

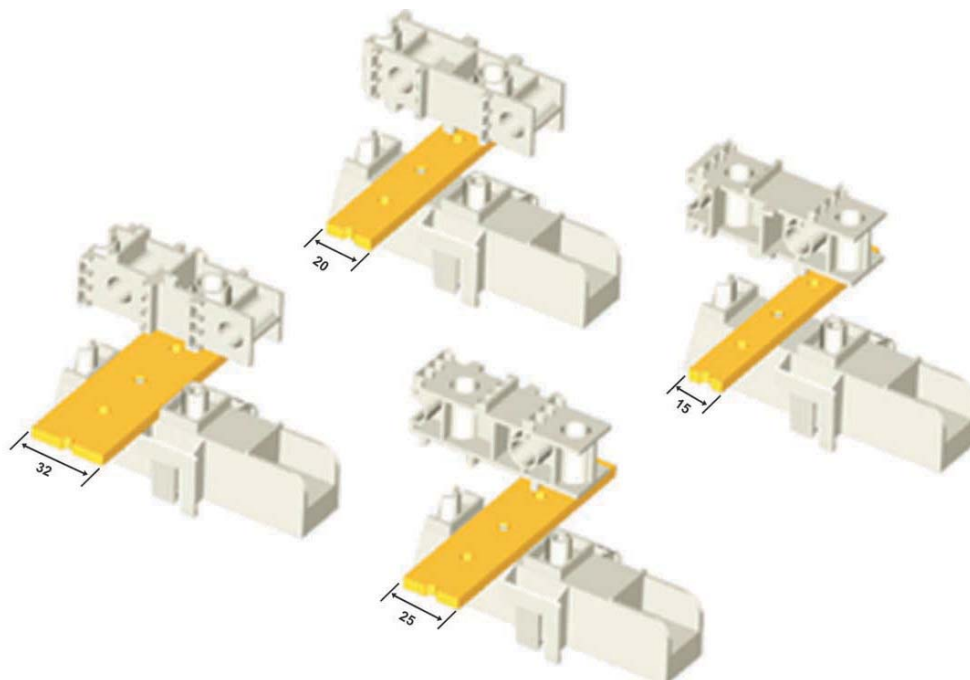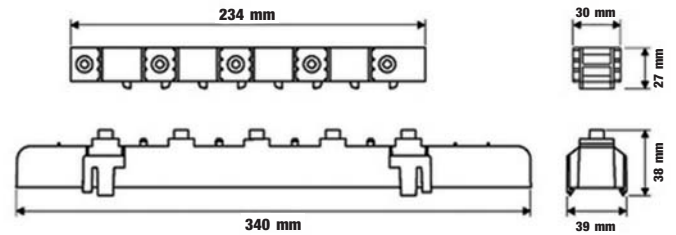


# Accessories

---

Descriptive illustrations	pages 135-136
End sections	page 137
End brackets	page 138
Mounting rails	pages 139-140
Inclined brackets	pages 141-142
Flat brackets	page 143
Copper busbar blocking terminals and accessories	page 144
Pre-assembled cross-connections	page 145
Cross connections - "Easy Bridge" system - PTC series	pages 146-148
Cross connections - PH and PHD series	page 149
Permanent cross connections - POF series	page 150
Commoning bars, shunting screws and sleeves	page 151
Switchable cross connections	page 152
Modular test plugs	page 153
Test plugs and sockets	page 154
Fuses and signal accessories	page 155
Coloured partitions	page 156
Cross connection barriers and protection covers	page 157
PZM covers, PZD supports and PRP protection covers	page 158
Warning plates and MSM handle	page 159
<i>Speed Rail</i>	pages 160-161
Marking systems – MarKing Pro	page 162-163
Marking systems – Numbering strips	pages 164-167
Specific accessories	page 168
Screwdrivers and pliers	page 169
Ferrules	page 170

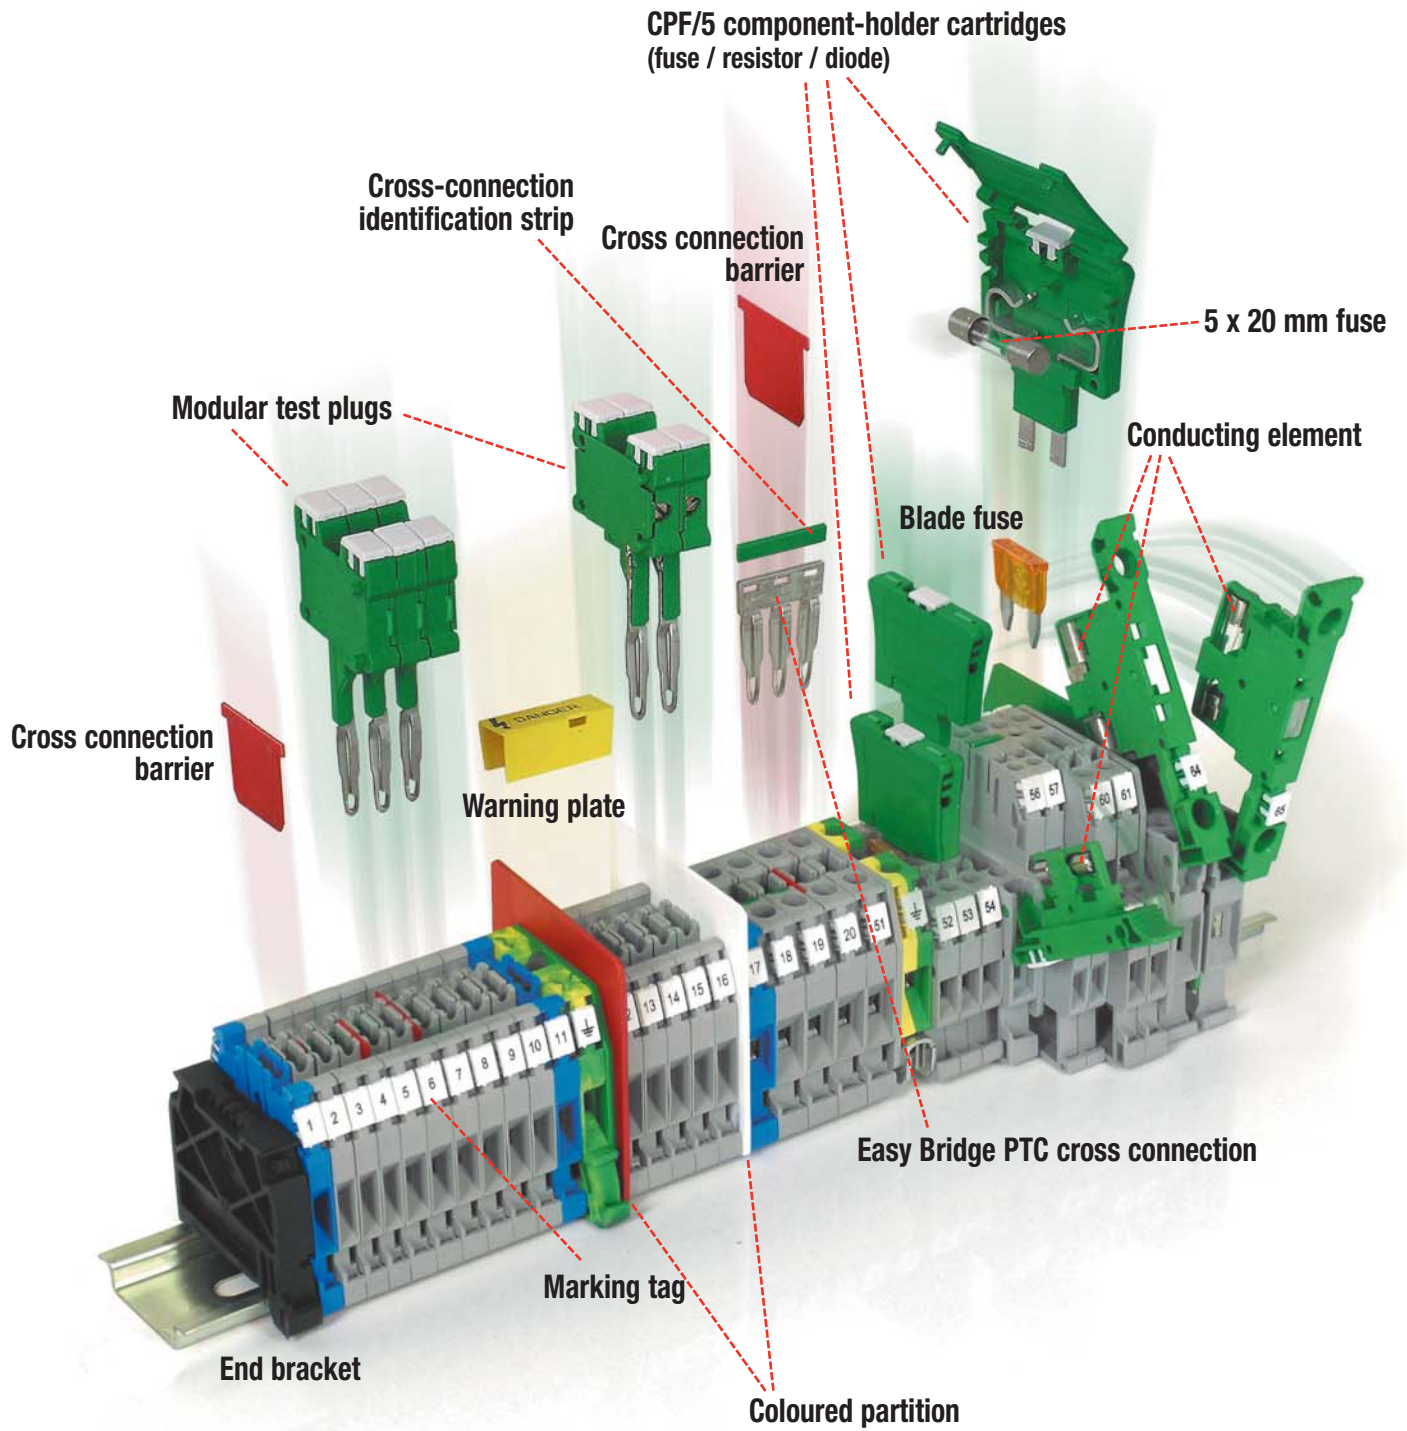

CBC Series terminal block and relevant accessories.

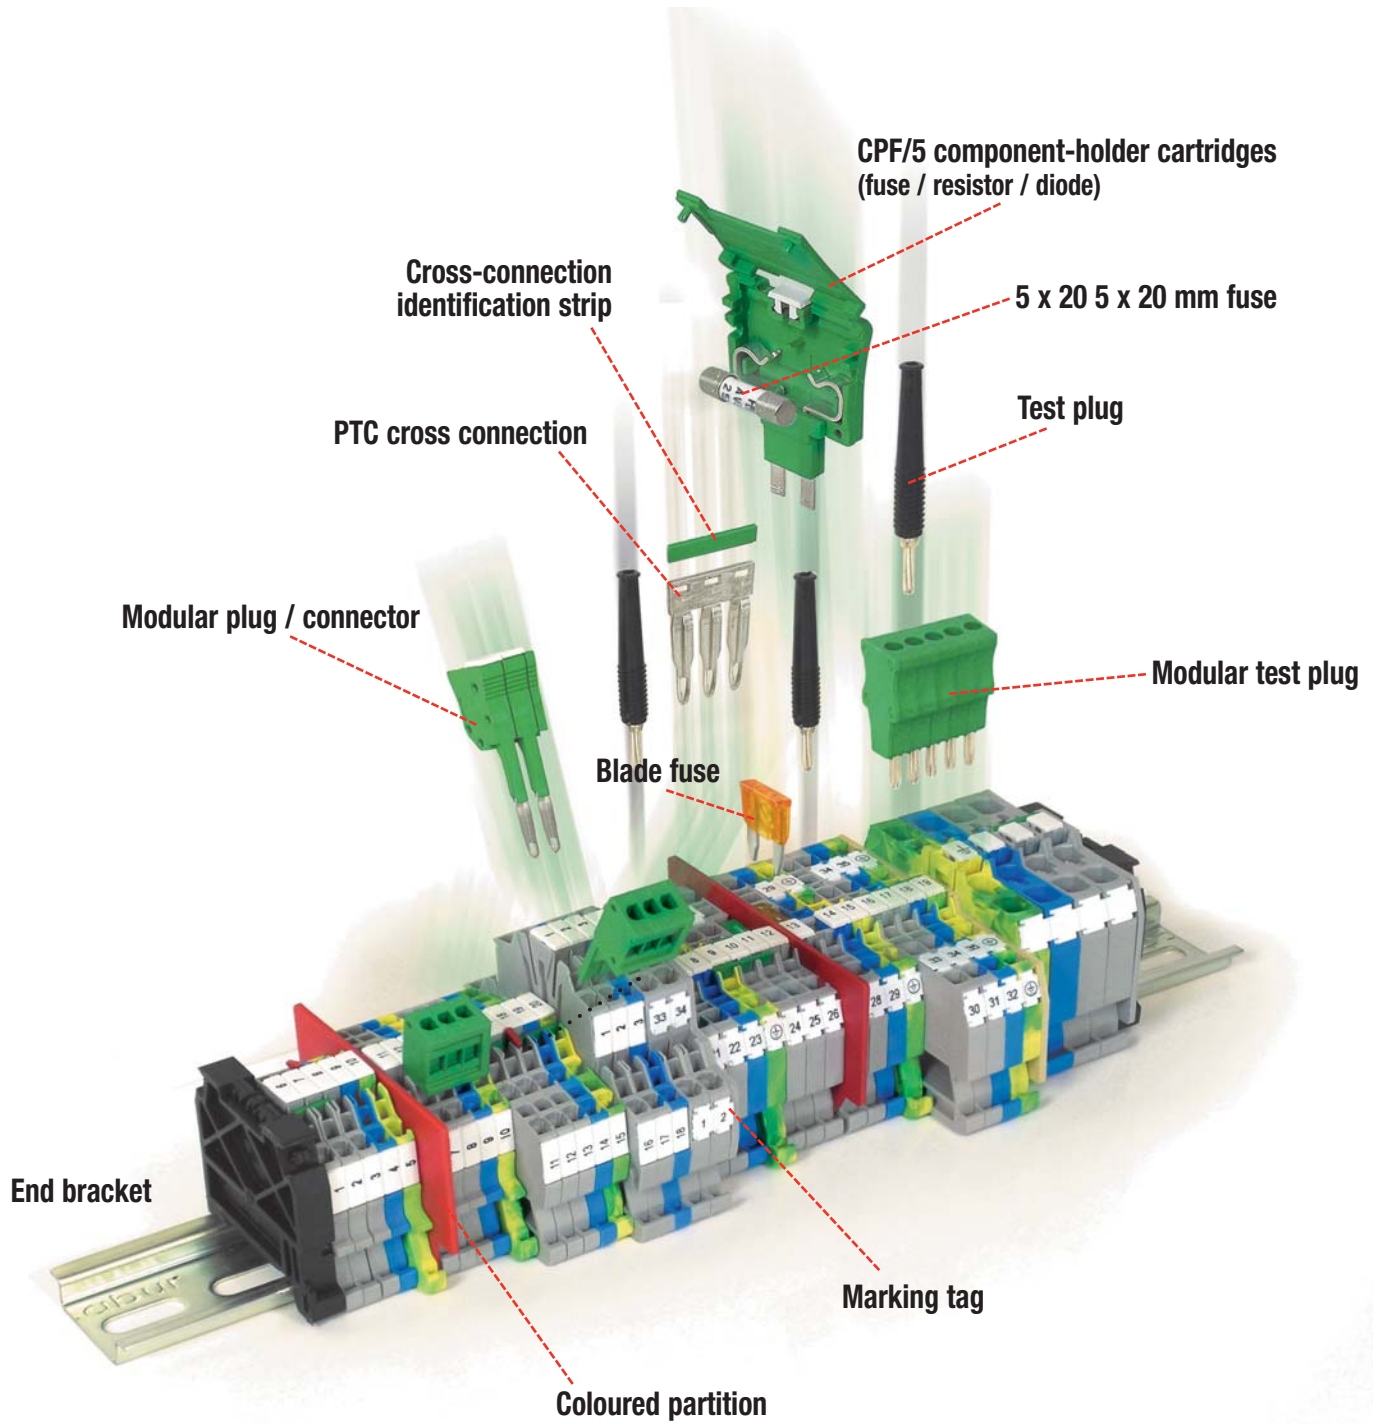

H Series terminal block and relevant accessories.

# PT end sections

For each type and cross section of terminal block, there is a specific insulating and closing end section to be placed on the open element of each terminal board. This end section may also be used to separate different phases of adjoining terminal blocks linked by cross connections or to increase insulation distances where specific circumstances may require it. The end sections have the **same overall dimension as the related terminal block**, thicknesses are given in the table below.

(\*) Available also in the grey colour version; to order it please add GR to the code and /GR to the name.



Terminal block	End section			Terminal block	End section			Terminal block	End section		
	Type	Cat. No.	Thickness mm		Type	Cat. No.	Thickness mm		Type	Cat. No.	Thickness mm
<b>Polyamide</b>											
AFO.2/1+1	<b>AFO/PT</b>	AF201	1,5	HTE.6	<b>HMT.6/PT</b>	HM321GR	1,5	HMD.2N(Ex)i	<b>HMD.1/PT(Ex)i</b>	HD301	1,5
AFO.2/2+2	<b>AFO/PT</b>	AF201	1,5	HTE.1	<b>HMT.1/PT</b>	HM401GR	1,5	HMM.1(Ex)i	<b>HMT.1/PT(Ex)i</b>	HI401	1,5
AFO.2/2+2/TP	<b>AFO/PT</b>	AF201	1,5	HTE.1/1+2	<b>HMT.1/1+2/PT</b>	HM411GR	1,5	HMM.1/1+2(Ex)i	<b>HMT.1/1+2/PT(Ex)i</b>	HI411	1,5
CBC.2 (*)	<b>CBC.2-10/PT</b>	CB061	1,5	HTE.1/2+2	<b>HMT.1/2+2/PT</b>	HM421GR	1,5	HMM.1/2+2(Ex)i	<b>HMT.1/2+2/PT(Ex)i</b>	HI421	1,5
CBC.4 (*)	<b>CBC.2-10/PT</b>	CB061	1,5	HTTE.2	<b>HLD.2/PT/GR</b>	HL201GR	1,5	HMM.2(Ex)i	<b>HMT.2/PT(Ex)i</b>	HI501	1,5
CBC.6 (*)	<b>CBC.2-10/PT</b>	CB061	1,5	MPS.2/SV	<b>MPS.2/PT</b>	MP121	1,5	HMM.2/1+2(Ex)i	<b>HMT.2/1+2/PT(Ex)i</b>	HI511	1,5
CBC.10 (*)	<b>CBC.2-10/PT</b>	CB061	1,5	MPS.2/SW (*)	<b>MPS.2/PT</b>	MP121	1,5	HMM.2/2+2(Ex)i	<b>HMT.2/2+2/PT(Ex)i</b>	HI521	1,5
CBC.16 (*)	<b>CBC.16/PT</b>	CB161	1,5	MPS.2/SWP (*)	<b>MPS.2/PT</b>	MP121	1,5	HMM.4(Ex)i	<b>HMT.4/PT(Ex)i</b>	HI251	1,5
CBC.35 (*)	<b>CBC.35/PT</b>	CB351	1,5	MPS.4 (*)	<b>MPS.4/PT</b>	MP901	1,5	HMM.6(Ex)i	<b>HMT.6/PT(Ex)i</b>	HI321	1,5
CBD.2	<b>CB2/PT</b>	CB111	1,5	MPFA.4 (*)	<b>MPS.4/PT</b>	MP901	1,5	HP.2(Ex)i	<b>HP/PT(Ex)i</b>	HP201	1,5
CBD.4	<b>CB4/6/PT</b>	CB241	1,5	MPS.4/SV	<b>MPS.4/PT</b>	MP901	1,5	HP.2/P(Ex)i	<b>HP/PT(Ex)i</b>	HP201	1,5
CBD.6	<b>CB4/6/PT</b>	CB241	1,5	NCS (*)	<b>NCS/PT</b>	NC101	1,5	HPC.2(Ex)i	<b>HP/PT(Ex)i</b>	HP201	1,5
CBD.10	<b>CB10/PT</b>	CB431	1,5	NCV (*)	<b>NCS/PT</b>	NC101	1,5	HPC.2(Ex)i	<b>HP/PT(Ex)i</b>	HP201	1,5
CBD.16	<b>CB16/PT</b>	CB511	1,5	PDF.2 (*)	<b>PDF/PT</b>	PF101	1,5	HPC.2/P(Ex)i	<b>HP/PT(Ex)i</b>	HP201	1,5
CBD.35	<b>CB35/PT</b>	CB611	1,5	RFI.2/GR	<b>RFN/PT/GR</b>	RF101GR	1,5	HPP.2(Ex)i	<b>HP/PT(Ex)i</b>	HP201	1,5
CBD.50	<b>CB50/PT</b>	CB711	1,5	RN.1/GR	<b>RFN/PT/GR</b>	RF101GR	1,5	HPP.2/P(Ex)i	<b>HP/PT(Ex)i</b>	HP201	1,5
CBD.70	<b>CB70/PT</b>	CB811	1,5	RN.2/GR	<b>RFN/PT/GR</b>	RF101GR	1,5	MPS.2/SW(Ex)i	<b>MPS.2/PT(Ex)i</b>	MP131	1,5
CBE.2	<b>CBR/PT</b>	CR111	1,5	RP.4/GR	<b>RP.4/PT/GR</b>	RP301GR	1,5	MPS.4(Ex)i	<b>MPS.4/PT(Ex)i</b>	MP902	1,5
CBR.2 (*)	<b>CBR/PT</b>	CR111	1,5	SCB.4 (*)	<b>SCB.4/PT</b>	SB301	1,5	RN.1(Ex)i	<b>RFN/PT(Ex)i</b>	RF201	1,5
CVF.4 (*)	<b>CVF/PT</b>	CV101	1,5	SCB.6 (*)	<b>SCB.6/PT</b>	SB201	1,5	RN.2(Ex)i	<b>RFN/PT(Ex)i</b>	RF201	1,5
CVF.4/TP	<b>CVF/PT</b>	CV101	1,5	SCB.6/DD (*)	<b>SCB.6/PT</b>	SB201	1,5	RP.4(Ex)i/PT	<b>RP.4/PT(Ex)i</b>	RP401	1,5
CVF.4/TPM	<b>CVF/PT</b>	CV101	1,5	SCB.10 (*)	<b>SCB.10/PT</b>	SB401	1,5	SFO.4(Ex)i	<b>SFO/PT(Ex)i</b>	SF601	1,5
CVF.4/VS (*)	<b>CVF/PT</b>	CV101	1,5	SCB.10/CD (*)	<b>SCB.10/PT</b>	SB401	1,5	SFR.4(Ex)i	<b>SFR/PT(Ex)i</b>	SF801	1,5
CVF.4/VS2	<b>CVF/PT</b>	CV101	1,5	SCB.10/DD (*)	<b>SCB.10/PT</b>	SB401	1,5	SFR.6(Ex)i	<b>SFR.6/PT(Ex)i</b>	SR401	1,5
CVF.4/WW (*)	<b>CVF/PT</b>	CV101	1,5	SCB.6/CD (*)	<b>SCB.6/PT</b>	SB201	1,5	TC/P0(Ex)i	<b>CB2/PT(Ex)i</b>	CBX13	1,5
DBC.2 (*)	<b>DBC/PT</b>	DB101	1,5	SFO.4	<b>SFO/PT</b>	SF401	1,5	TLD.2(Ex)i	<b>TLD/PT(Ex)i</b>	TL301	1,5
DAS.4 (*)	<b>DAS/PT</b>	DS101	1,5	SFO.4/C....	<b>SFO/PT</b>	SF401	1,5	VPC.2(Ex)i	<b>VPC/PT(Ex)i</b>	VP201	1,5
DAS.4/CI (*)	<b>DAS/PT</b>	DS101	1,5	SFR.4 (*)	<b>SFR/PT</b>	SF701	1,5	VPD.2(Ex)i	<b>VPD/PT(Ex)i</b>	VP561	1,5
DAS.4/SS (*)	<b>DAS/PT</b>	DS101	1,5	SFR.4/C....	<b>SFR/PT</b>	SF701	1,5	<b>Melamine</b>			
DSF.4/GR	<b>DFS.4/PT/GR</b>	DS401GR	1,5	SFR.4/D1A	<b>SFR/PT</b>	SF701	1,5	CDA.70/BB/BC/CC	<b>CDA.70/PT</b>	CD101	4
DSFA.4 (*)	<b>DSS/PT</b>	DS301	1,5	SFR.4/D3A	<b>SFR/PT</b>	SF701	1,5	CDA.120/BB/BC/CC	<b>CDA.120/PT</b>	CD401	4
DSS.4 (*)	<b>DSS/PT</b>	DS301	1,5	SFR.4/VS (*)	<b>SFR/PT</b>	SF701	1,5	CDA.185/BB/BC/CC	<b>CDA.185/PT</b>	CD701	5
FDP.2 (*)	<b>FDP/PT</b>	FD101	1,5	SFR.6 (*)	<b>SFR.6/PT</b>	SR301	1,5	EDM.2	<b>EDM.2/PT</b>	ED111	3
FFS.4 (*)	<b>FFS/PT</b>	FF101	1,5	TC/PO	<b>CB2/PT</b>	CB111	1,5	EDM.4	<b>EDM.4-10/PT</b>	ED401	3
FVS.4 (*)	<b>FVS/PT</b>	FV101	1,5	TEO.2	<b>TEO.2/PT</b>	TO901	1,5	EDM.6	<b>EDM.4-10/PT</b>	ED401	3
HCD.1/GR	<b>HCD.1/PT/GR</b>	HC201GR	1,5	TEO.4	<b>TEO.4/PT</b>	TO431	1,5	EDM.10	<b>EDM.4-10/PT</b>	ED401	3
HDE.2/GR	<b>HLD.2/PT/GR</b>	HL201GR	1,5	TED.4	<b>TEO.4/PT</b>	TO431	1,5	EDM.16	<b>EDM.16/PT</b>	ED501	3
HFR.4/GR	<b>HFR.4/PT/GR</b>	HF211GR	2	TDE.2 (*)	<b>TLS/PT</b>	TL101	1,5	EDM.25	<b>EDM.25/PT</b>	ED601	3
HFR.4/M/GR	<b>HFR.4/PT/GR</b>	HF211GR	2	TLD.2 (*)	<b>TLD/PT</b>	TL201	1,5	EDM.35	<b>EDM.35/PT</b>	ED701	3
HLD.2/GR	<b>HLD.2/PT/GR</b>	HL201GR	1,5	TLE.2 (*)	<b>TLS/PT</b>	TL101	1,5	EDM.70	<b>EDM.70/PT</b>	ED801	3,5
HMD.2/GR	<b>HMD.2/PT/GR</b>	HD101GR	1,5	TLS.2 (*)	<b>TLS/PT</b>	TL101	1,5	FLD.10/..	<b>FLD/PT</b>	FL101	3
HMF.4/GR	<b>HMF.4/PT/GR</b>	HF111GR	1,5	VPC.2 (*)	<b>VPC/PT</b>	VP101	1,5	SCX.10	<b>SCX/PT</b>	SC101	3
HSCB.4/GR	<b>HSCB.4/PT/GR</b>	HB101GR	1,5	VPC.2/GV	<b>VPC/PT</b>	VP101	1,5	SFC.10	<b>SFC/PT</b>	FC101	5
HSCB.6/GR	<b>HSCB.6/PT/GR</b>	HB201GR	1,5	VPD.2 (*)	<b>VPD/PT</b>	VP501	1,5	SFL.10	<b>SFC/PT</b>	FC101	5
HMM.2/GR	<b>HMT.2/PT/GR</b>	HM501GR	1,5	TR.2	<b>TR.2/PT</b>	TR111	1,5	SV.2	<b>SV.2/PT</b>	SV101	3
HMM.2/1+2/GR	<b>HMT.2/1+2/PT/GR</b>	HM511GR	1,5	<b>(Ex)i Polyamide</b>				SV.4	<b>SV.4/PT</b>	SV201	3
HMM.2/2+2/GR	<b>HMT.2/2+2/PT/GR</b>	HM521GR	1,5	CBC.2(Ex)i	<b>CBC.2-10/PT(Ex)i</b>	CBI061	1,5	SV.6	<b>SV.6/PT</b>	SV301	3,5
HMM.2/2+2/S/GR	<b>HMT.2/2+2/PT/GR</b>	HM521GR	1,5	CBC.4(Ex)i	<b>CBC.2-10/PT(Ex)i</b>	CBI061	1,5	SV.10	<b>SV.10/PT</b>	SV401	3,5
HMM.4/GR	<b>HMT.4/PT/GR</b>	HM251GR	1,5	CBC.6(Ex)i	<b>CBC.2-10/PT(Ex)i</b>	CBI061	1,5	TC/DIN	<b>EDM2/PT</b>	ED111	3
HMM.1/GR	<b>HMT.1/PT/GR</b>	HM401GR	1,5	CBC.10(Ex)i	<b>CBC.2-10/PT(Ex)i</b>	CBI061	1,5	VLM.10	<b>VLM/PT</b>	VL201	3
HMM.1/1+2/GR	<b>HMT.1/1+2/PT</b>	HM411GR	1,5	CBC.16(Ex)i	<b>CBC.16/PT(Ex)i</b>	CBI161	1,5	<b>(Ex)i Melamine</b>			
HMM.1/2+2/GR	<b>HMT.1/2+2/PT</b>	HM421GR	1,5	CBC.35(Ex)i	<b>CBC.35/PT(Ex)i</b>	CBI351	1,5	EDM.2(Ex)i	<b>EDM.2/PT(Ex)i</b>	EI111	3
HMD.1/GR	<b>HMD.1/PT/GR</b>	HD201GR	1,5	CBD.2(Ex)i	<b>CB2/PT(Ex)i</b>	CBX13	1,5	EDM.4(Ex)i	<b>EDM.4-10/PT(Ex)i</b>	EI401	3
HMD.2N/GR	<b>HMD.1/PT/GR</b>	HD201GR	1,5	CBD.4(Ex)i	<b>CB4/6/PT(Ex)i</b>	CBX25	1,5	EDM.6(Ex)i	<b>EDM.4-10/PT(Ex)i</b>	EI401	3
HMM.6/GR	<b>HMT.6/PT/GR</b>	HM321GR	1,5	CBD.6(Ex)i	<b>CB4/6/PT(Ex)i</b>	CBX25	1,5	EDM.10(Ex)i	<b>EDM.4-10/PT(Ex)i</b>	EI401	3
HMS.2/GR	<b>HMT.2/2+2/PT/GR</b>	HM521GR	1,5	CBD.10(Ex)i	<b>CB10/PT(Ex)i</b>	CBX44	1,5	EDM.16(Ex)i	<b>EDM.16/PT(Ex)i</b>	EI501	3
HMFA.2/GR	<b>HMT.2/1+2/PT/GR</b>	HM511GR	1,5	CBD.16(Ex)i	<b>CB16/PT(Ex)i</b>	CBX53	1,5	EDM.25(Ex)i	<b>EDM.25/PT(Ex)i</b>	EI601	3
HP.2/GR	<b>HPV/PT/GR</b>	HV111GR	1,5	CBD.35(Ex)i	<b>CB35/PT(Ex)i</b>	CBX63	1,5	EDM.35(Ex)i	<b>EDM.35/PT(Ex)i</b>	EI701	3
HPC.2/GR	<b>HPV/PT/GR</b>	HV111GR	1,5	CBD.50(Ex)i	<b>CB50/PT(Ex)i</b>	CBX73	1,5	EDM.70(Ex)i	<b>EDM.70/PT(Ex)i</b>	EI801	3,5
HPP.2/GR	<b>HP/PT/GR</b>	HV101GR	1,5	CBD.70(Ex)i	<b>CB70/PT(Ex)i</b>	CBX83	1,5	SV.2(Ex)i	<b>SV.2/PT(Ex)i</b>	SI101	3
HTE.2	<b>HMT.2/PT</b>	HM501GR	1,5	CVF.4(Ex)i	<b>CVF/PT(Ex)i</b>	CV201	1,5	SV.4(Ex)i	<b>SV.4/PT(Ex)i</b>	SI201	3
HTE.2/1+2	<b>HMT.2/1+2/PT</b>	HM511GR	1,5	DBC.2(Ex)i	<b>DBC/PT(Ex)i</b>	DB201	1,5	SV.6(Ex)i	<b>SV.6/PT(Ex)i</b>	SI301	3,5
HTE.2/2+2	<b>HMT.2/2+2/PT</b>	HM521GR	1,5	DAS.4(Ex)i	<b>DAS/PT(Ex)i</b>	DS201	1,5	SV.10(Ex)i	<b>SV.10/PT(Ex)i</b>	SI401	3,5
HTE.4	<b>HMT.4/PT</b>	HM251GR	1,5	DAS.4/CI(Ex)i	<b>DAS/PT(Ex)i</b>	DS201	1,5	TC/DIN(Ex)i	<b>EDM2/PT(Ex)i</b>	EI101	3
				HMD.1(Ex)i	<b>HMD.1/PT(Ex)i</b>	HD301	1,5				

# End brackets

## BTU

Cat. No. **BT005**

**Universal** end bracket, suitable for rails according to either IEC 60715 type "G32" or IEC 60715/TH35 (types PR/DIN and PR/3); can be mounted directly in the desired position and does not require screw fixing.

- of black polyamide
- thickness: 8 mm



## BTO

Cat. No. **BT007**

End bracket, suitable for rails according to IEC 60715/TH 35 (types PR/3); can be mounted directly in the desired position and does not require screw fixing. Especially suitable for fixing screw, high type.

- of black polyamide
- thickness: 8 mm



## BT/3

Cat. No. **BT003**

To be mounted on rails according to IEC 60715/TH35 Std. (type PR/3)

- of black polyamide
- thickness: 8 mm



## BT/2

Cat. No. **BT006**

To be mounted on rails according to IEC 60715/TH35 Std. (type PR/2)

- of black polyamide
- thickness: 8 mm



## BT/DIN/PO

Cat. No. **BT001**

To be mounted on rails according to IEC 60715 Std. type "G32" (type PR/DIN)

- of black polyamide
- thickness: 8 mm



## CDA/BT

Cat. No. **CD003**

To be mounted on rails according to IEC 60715 Std. type "G32" (type PR/DIN)

- in brass (particularly suitable for rail assemblies formed by terminal blocks of larger dimensions, such as GPM, GPA, CDA and ACB)
- thickness: 11 mm





# Mounting rails

- according to IEC 60715/TH35 - 7,5
- according to IEC 60715/TH35 - 15
- supports for TH/35 type rail












DESCRIPTION	TYPE/CAT. NO.	IMAGES
<b>IEC 60715/TH35 - 7.5 rail</b> of passivated steel	<b>PR/3/AC</b> Cat. No. PR003	
<b>IEC 60715/TH35 - 7.5 rail</b> of white zinc-plated steel "SENDZMIR" system	<b>PR/3/AC/ZB</b> Cat. No. PR903	
<b>IEC 60715/TH35 - 7.5 rail</b> of passivated steel with slots	<b>PR/3/AS</b> Cat. No. PR005	
<b>IEC 60715/TH35 - 7.5 rail</b> of white zinc-plated steel "SENDZMIR" system with slots	<b>PR/3/AS/ZB</b> Cat. No. PR905	
<b>IEC 60715/TH35 - 15 rail</b> of passivated steel	<b>PR/3/PP</b> Cat. No. PR007	
<b>IEC 60715/TH35 - 15 rail</b> of white zinc-plated steel "SENDZMIR" system	<b>PR/3/PP/ZB</b> Cat. No. PR907	
<b>IEC 60715/TH35 - 15 rail</b> of passivated steel with slots	<b>PR/3/PA</b> Cat. No. PR006	
<b>IEC 60715/TH35 - 15 rail</b> of white zinc-plated steel "SENDZMIR" system with slots	<b>PR/3/PA/ZB</b> Cat. No. PR906	
<b>Support for IEC 60715/TH35 rail</b> of nickel plated steel and with rapid mounting system 4 MA	<b>ACI121017</b> Cat. No. Z121017	
<b>Support for IEC 60715/TH35 rail</b> of nickel plated steel and with rapid mounting system 5 MA	<b>ACI121019</b> Cat. No. Z121019	

# Mounting rails

- according to IEC 60715 “G32” type rail
- according to IEC 60715/TH15 - 5,5

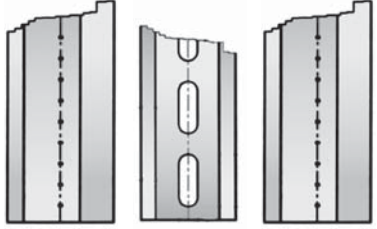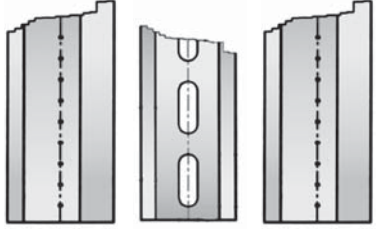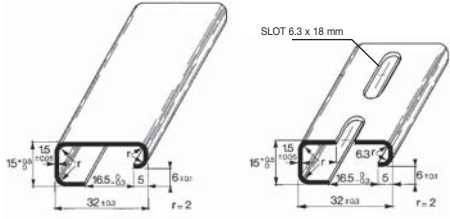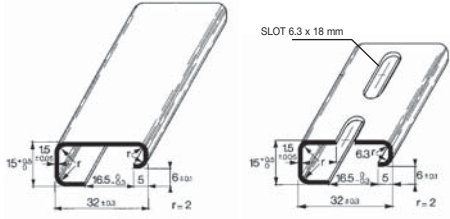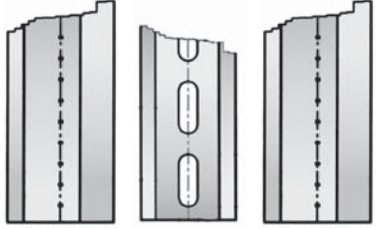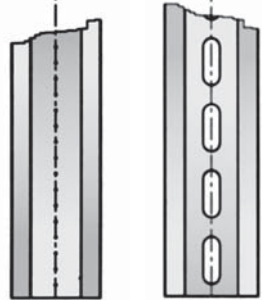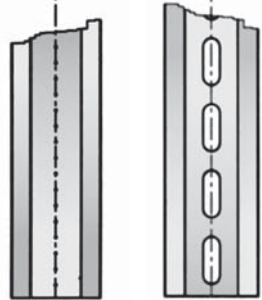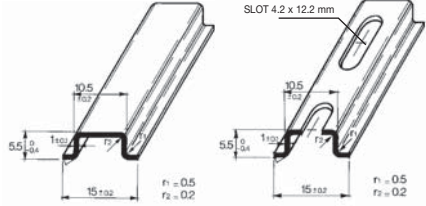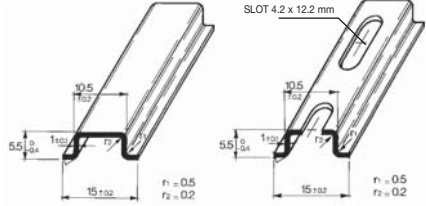

DESCRIPTION	TYPE/CAT. NO.	IMAGES
<b>IEC 60715 “G32” type rail</b> of passivated steel	<b>PR/DIN/AC</b> Cat. No. PR001	
<b>IEC 60715 “G32” type rail</b> of white zinc-plated steel “SENDZMIR” system	<b>PR/DIN/AC/ZB</b> Cat. No. PR901	
<b>IEC 60715 “G32” type rail</b> of passivated steel with slots	<b>PR/DIN/AS</b> Cat. No. PR004	
<b>IEC 60715 “G32” type rail</b> of white zinc-plated steel “SENDZMIR” system with slots	<b>PR/DIN/AS/ZB</b> Cat. No. PR904	
<b>IEC 60715 “G32” type rail</b> of aluminium	<b>PR/DIN/AL</b> Cat. No. PR002	
<b>IEC 60715/TH15 – 5.5 rail</b> of passivated steel	<b>PR/2/AC</b> Cat. No. PR009	
<b>IEC 60715/TH15 – 5.5 rail</b> of white zinc-plated steel “SENDZMIR” system	<b>PR/2/AC/ZB</b> Cat. No. PR909	
<b>IEC 60715/TH15 – 5.5 rail</b> of passivated steel with slots	<b>PR/2/AS</b> Cat. No. PR010	
<b>IEC 60715/TH15 – 5.5 rail</b> of white zinc-plated steel “SENDZMIR” system with slots	<b>PR/2/AS/ZB</b> Cat. No. PR910	

# Accessories for mounting rails

- inclined bracket



DESCRIPTION	TYPE/CAT. NO.	IMAGES
<p><b>Zinc-plated inclined bracket</b>  <b>6 x 6 mm</b> copper busbar holder, with possibility to mount an earth collecting busbar alongside the whole length of the terminal board</p>	<p><b>ACI121116</b>            Cat. No. Z121116</p>	
<p><b>Zinc-plated inclined bracket</b>  <b>6 x 6 mm</b> copper busbar holder, with possibility to mount an earth collecting busbar alongside the whole length of the terminal board</p>	<p><b>ACI121301</b>            Cat. No. Z121301</p>	
<p><b>Zinc-plated inclined bracket</b>  <b>"2" M5</b> standard busbar holder, with 2 screw fixing</p>	<p><b>ACI121311</b>            Cat. No. Z121311</p>	
<p><b>Zinc-plated inclined bracket</b>  <b>"2" M6</b> standard busbar holder, with 2 screw fixing</p>	<p><b>ACI121314</b>            Cat. No. Z121314</p>	
<p><b>22°30' inclined bracket</b>  <b>"6" M6</b> standard busbar holder, with 1 screw fixing</p>	<p><b>ACI121415</b>            Cat. No. Z121415</p>	
<p><b>45° inclined bracket</b>  <b>"1" M6</b> standard busbar holder, with 1 screw fixing</p>	<p><b>ACI121228</b>            Cat. No. Z121228</p>	

# Accessories for mounting rails


- inclined zinc plated rail brackets, suitable for mounting rail fixing - M6 threaded hole



DESCRIPTION	TYPE/CAT. NO.	IMAGES
<p><b>Inclined rail holder, standard</b> H = 58 mm</p>	<p><b>ACI121316</b> Cat. No. Z121316</p>	
<p><b>Inclined rail holder, standard</b> H = 68 mm</p>	<p><b>ACI121317</b> Cat. No. Z121317</p>	
<p><b>Inclined rail holder, standard</b> H = 78 mm</p>	<p><b>ACI121318</b> Cat. No. Z121318</p>	
<p><b>Inclined rail holder, standard</b> H = 88 mm</p>	<p><b>ACI121319</b> Cat. No. Z121319</p>	
<p><b>Inclined rail holder, standard</b> H = 98 mm</p>	<p><b>ACI121410</b> Cat. No. Z121410</p>	

# Accessories for mounting rails


- flat zinc plated brackets, suitable for mounting rail fixing - M6 threaded hole

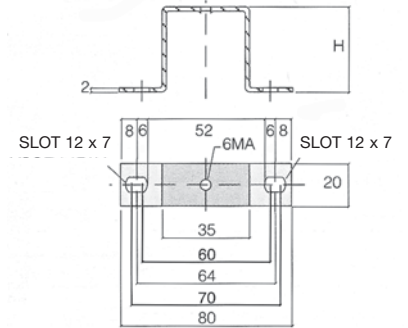

Fixing distance between centers, with 6MA screw, from 60 to 70 mm

DESCRIPTION	TYPE/CAT. NO.	IMAGES
Flat rail support, standard H = 20 mm	<b>ACI121213</b> Cat. No. Z121213	
Flat rail support, standard H = 25 mm	<b>ACI121214</b> Cat. No. Z121214	
Flat rail support, standard H = 30 mm	<b>ACI121215</b> Cat. No. Z121215	
Flat rail support, standard H = 40 mm	<b>ACI121216</b> Cat. No. Z121216	
Flat rail support, standard H = 50 mm	<b>ACI121217</b> Cat. No. Z121217	
Flat rail support, standard H = 70 mm	<b>ACI121218</b> Cat. No. Z121218	
Flat rail support, standard H = 90 mm	<b>ACI121219</b> Cat. No. Z121219	

# Accessories for mounting rails

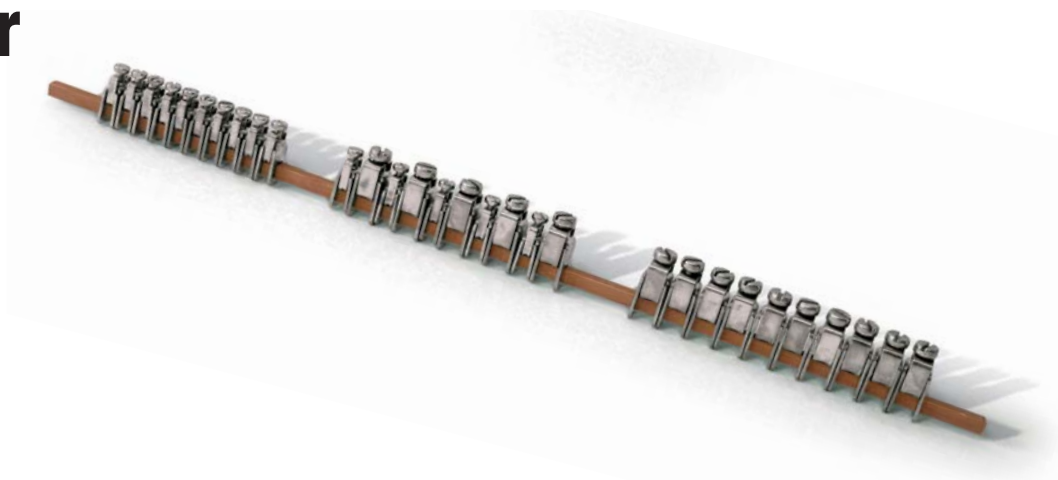

DESCRIPTION	TYPE / CAT. NO.	IMAGES
<b>6 x 6 mm copper busbar L = 2 m</b> suited for the the mounting of terminals for the grounding of electrical cables	<b>ACI121123</b>  Cat. No. Z121123	
<b>6 x 6 mm copper busbar blocking terminal</b> with 6 MA x 12 mm screw	<b>ACI121118</b>  Cat. No. Z121118	
<b>Terminal with saddle for 6 x 6 mm copper busbar</b> cable cross-section from 0.5 to 16 mm <sup>2</sup>	<b>ACI121119</b>  Cat. No. Z121119	
<b>Terminal with saddle for 6 x 6 mm copper busbar</b> cable cross-section from 4 to 35 mm <sup>2</sup>	<b>ACI121121</b>  Cat. No. Z121121	
<b>Special hexagon slot 6 MA x 12 mm screw</b>	<b>ACI121026</b>  Cat. No. Z121026	
<b>Special hexagon slot 5 MA x 10 mm screw</b>	<b>ACI121421</b>  Cat. No. Z121421	
<b>4 MA nut for rapid mounting</b> onto 32 x 9 x 15 mm steel rails	<b>ACI121211</b>  Cat. No. Z121211	
<b>5 MA nut for rapid mounting</b> onto 32 x 9 x 15 mm steel rails	<b>ACI121212</b>  Cat. No. Z121212	
<b>6 x 6 mm copper busbar blocking terminal</b> with 6 MA x 25 mm screw	<b>ACI121221</b>  Cat. No. Z121221	
<b>Inclined copper busbar support</b> with 6 MA x 10 mm screw and 6 MA nut	<b>ACI121307</b>  Cat. No. Z121307	

# Pre-assembled cross sections

They are supplied in 2, 3, 5 or 10-pole pre-assembled configuration.

They allow the cross connection between two or more adjacent terminal blocks; their position once mounted is such as to **prevent injuries**.

All the components are made of nickel-plated brass.





## Screw-clamp terminal blocks

Terminal block	2-pole jumper		3-pole jumper		5-pole jumper		10-pole jumper	
	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
CBD.2	PM/20/2	PM202	PM/20/3	PM203	PM/20/5	PM205	PM/20/10	PM210
CBD.4	PM/40/2	PM402	PM/40/3	PM403	PM/40/5	PM405	PM/40/10	PM400
CBD.6	PM/60/2	PM602	PM/60/3	PM603	PM/60/5	PM605	PM/60/10	PM610
CBD.10	PM/10/2	PM102	PM/10/3	PM103	PM/10/5	PM105	PM/10/10	PM100
CBR.2	PM/25/2	PM252	PM/25/3	PM253	PM/25/5	PM255	PM/25/10	PM250
CVF.4	PM/40/2	PM402	PM/51/3	PM513	PM/51/5	PM515	PM/51/10	PM510
DAS.4	PM/41/2	PM412	PM/51/3	PM513	PM/51/5	PM515	PM/51/10	PM510
EDM.2	PM/20/2	PM202	PM/20/3	PM203	PM/20/5	PM205	PM/20/10	PM210
EDM.4	PM/40/2	PM402	PM/40/3	PM403	PM/40/5	PM405	PM/40/10	PM400
EDM.6	PM/60/2	PM602	PM/60/3	PM603	PM/60/5	PM605	PM/60/10	PM610
EDM.10	PM/10/2	PM102	PM/10/3	PM103	PM/10/5	PM105	PM/60/10	PM610
FDP.2	PH/2,5-4	PH100						
FFS.4	PM/41/2	PM412	PM/41/3	PM413	PM/41/5	PM415	PM/41/10	PM410
FVS.4	PM/41/2	PM412	PM/41/3	PM413	PM/41/5	PM415	PM/41/10	PM410
MPS2/SV	PM/91/2	PM912	PM/91/3	PM913	PM/91/5	PM915	PM/91/10	PM910
MPS.2/SW	PM/91/2	PM912	PM/91/3	PM913	PM/91/5	PM915	PM/91/10	PM910
MPS.2/SWP	PM/91/2	PM912	PM/91/3	PM913	PM/91/5	PM915	PM/91/10	PM910
RN.1	PM/11/2	PM112	PM/11/3	PM113	PM/11/5	PM115	PM/11/10	PM110
RP.4	PM/41/2	PM412	PM/51/3	PM513	PM/51/5	PM515	PM/51/10	PM510
SCB.4	PM/41/2	PM412	PM/41/3	PM413	PM/41/5	PM415	PM/41/10	PM410
SFO.4	PM/90/2	PM902	PM/90/3	PM903	PM/90/5	PM905	PM/90/10	PM900
TDE.2	PM/20/2	PM202	PM/30/3	PM303	PM/30/5	PM305	PM/30/10	PM310
TLD.2	PM/20/2	PM202	PM/30/3	PM303	PM/30/5	PM305	PM/30/10	PM310
TLE.2	PM/20/2	PM202	PM/30/3	PM303	PM/30/5	PM305	PM/30/10	PM310
TLS.2	PM/20/2	PM202	PM/30/3	PM303	PM/30/5	PM305	PM/30/10	PM310
RN.2	PM/12/2	PM122	PM/12/3	PM123	PM/12/5	PM125	PM/12/10	PM120
<b>Insulated jumper</b>								
MAC.6	PIL/2 (2 poli)	PIL02	PIL/3 (3 poli)	PIL03	PIL/4 (4 poli)	PIL04	PIL/8 (8 poli)	PIL08

# Cross connections

## Easy Bridge System

- screwless, snap-in insertion
- transversal and staggered mode connection possibility
- once inserted, **intrinsically IPXXB protected** resulting installation, without the need for further insulating covers
- patented system

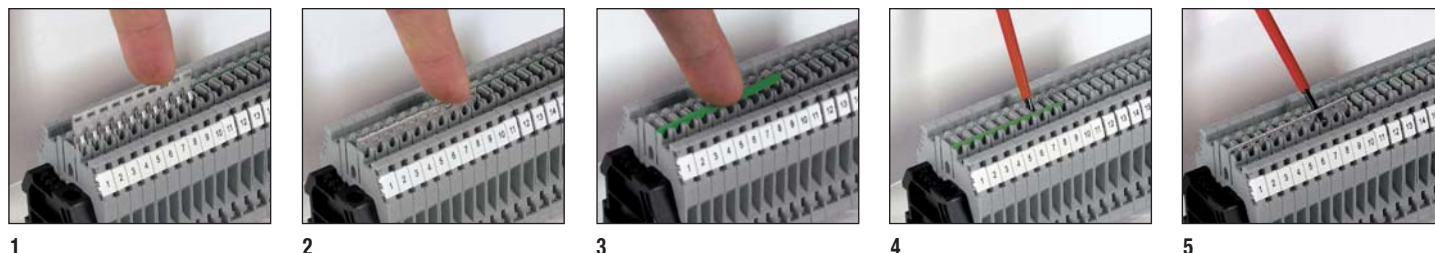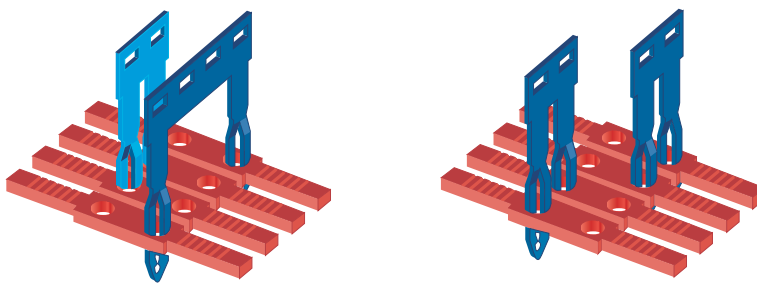

**1-2** After having cut the bar according to the number of poles, insert the cross-connection, in the appropriate groove of the terminal block. At this point, by using the blade of a screwdriver, push down the cross-connection until it reaches its blocking point. The cross connection will be fully insulated and intrinsically IPXXB protected.

**3-4** After having mounted the cross-connection, the connected poles can be outlined and detected by the PTC/SP green strip. This strip is supplied in the 100 mm standard length and it can be easy cut to the appropriate length with the aid of a cutter.

**5** To remove the cross-connection, it is sufficient to remove the PTC/SP strip: insert the blade of the screwdriver in the jumper slot, then lift it up and finally extract it.

Terminal block	2-pole jumper		3-pole jumper		5-pole jumper		10-pole jumper		Jumper l = 250 mm		
	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.	Poles
CBC.2 (*)	PTC/2/02	PTC0202	PTC/2/03	PTC0203	PTC/2/05	PTC0205	PTC/2/10	PTC0210	PTC/2/00	PTC0200	50
CBC.4 (*)	PTC/4/02	PTC0402	PTC/4/03	PTC0403	PTC/4/05	PTC0405	PTC/4/10	PTC0410	PTC/4/00	PTC0400	42
CBC.6 (*)	PTC/6/02	PTC0602	PTC/6/03	PTC0603	PTC/6/05	PTC0605	PTC/6/10	PTC0610	PTC/6/00	PTC0600	31
CBC.10 (*)	PTC/10/02	PTC1002	PTC/10/03	PTC1003	PTC/10/05	PTC1005	PTC/10/10	PTC1010	PTC/10/00	PTC1000	25
DBC.2 (*)	PTC/2/02	PTC0202	PTC/2/03	PTC0203	PTC/2/05	PTC0205	PTC/2/10	PTC0210	PTC/2/00	PTC0200	50
DSFA.4 (*)	PTC/4/02	PTC0402	PTC/4/03	PTC0403	PTC/4/05	PTC0405	PTC/4/10	PTC0410	PTC/4/00	PTC0400	42
DSS.4 (*)	PTC/4/02	PTC0402	PTC/4/03	PTC0403	PTC/4/05	PTC0405	PTC/4/10	PTC0410	PTC/4/00	PTC0400	42
HMM.1/GR (**)	PTC/1/02	PTC0102	PTC/1/03	PTC0103	PTC/1/05	PTC0105	PTC/1/10	PTC0110	PTC/1/00	PTC0100	50
HMD.1/GR	PTC/1/02	PTC0102	PTC/1/03	PTC0103	PTC/1/05	PTC0105	PTC/1/10	PTC0110	PTC/1/00	PTC0100	50
HCD.1/GR	PTC/2/02	PTC0202	PTC/2/03	PTC0203	PTC/2/05	PTC0205	PTC/2/10	PTC0210	PTC/2/00	PTC0200	50
HDE.2/GR (**)	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
HLD.2/GR (**)	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
HFR.4/GR	PTC/5/02	PTC0502	-	-	-	-	-	-	-	-	-
HFR.4/M/GR	PTC/5/02	PTC0502	PTC/5/03	PTC0503	PTC/5/05	PTC0505	PTC/5/10	PTC0510	PTC/5/00	PTC0500	40
HMM.2/GR (**)	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
HMS.2/GR	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
HMFA.2/GR	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
HMM.4/GR (**)	PTC/5/02	PTC0502	PTC/5/03	PTC0503	PTC/5/05	PTC0505	PTC/5/10	PTC0510	PTC/5/00	PTC0500	40
HMFA.2/GR	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
HSCB.4/GR	PTC/5/02	PTC0502	PTC/5/03	PTC0503	PTC/5/05	PTC0505	PTC/5/10	PTC0510	PTC/5/00	PTC0500	40
HSCB.6/GR	PTC/8/02	PTC0802	PTC/8/03	PTC0803	PTC/8/05	PTC0805	PTC/8/10	PTC0810	PTC/8/00	PTC0800	30
HMM.6/GR	PTC/8/02	PTC0802	PTC/8/03	PTC0803	PTC/8/05	PTC0805	PTC/8/10	PTC0810	PTC/8/00	PTC0800	30
HMM.10/GR	PTC/11/02	PTC1102	PTC/11/03	PTC1103	PTC/11/05	PTC1105	PTC/11/10	PTC1110	PTC/11/00	PTC1100	25
HMM.16/GR	PTC/16/02	PTC1602	PTC/16/03	PTC1603	PTC/16/05	PTC1605	PTC/16/10	PTC1610	PTC/16/00	PTC1600	20
HVPC.2/GR	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
CHP.2/GR	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
CHP.2D/GR	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
HPP.2/GR	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
HP.2/GR	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
HPC.2/GR	PTC/3/02	PTC0302	PTC/3/03	PTC0303	PTC/3/05	PTC0305	PTC/3/10	PTC0310	PTC/3/00	PTC0300	47
MPS.4 (*)	PTC/4/02	PTC0402	PTC/4/03	PTC0403	PTC/4/05	PTC0405	PTC/4/10	PTC0410	PTC/4/00	PTC0400	42
MPFA.4 (*)	PTC/4/02	PTC0402	PTC/4/03	PTC0403	PTC/4/05	PTC0405	PTC/4/10	PTC0410	PTC/4/00	PTC0400	42
SFR.6 (*)	PTC/20/02	PTC2002	PTC/20/03	PTC2003	PTC/20/05	PTC2005	PTC/20/10	PTC2010	PTC/20/00	PTC2000	25
VPC.2 (*)	PTC/2/02	PTC0202	PTC/2/03	PTC0203	PTC/2/05	PTC0205	PTC/2/10	PTC0210	PTC/2/00	PTC0200	50
VPD.2 (*)	PTC/2/02	PTC0202	PTC/2/03	PTC0203	PTC/2/05	PTC0205	PTC/2/10	PTC0210	PTC/2/00	PTC0200	50


(\*) Item available in grey colour too.

(\*\*) Including versions /1+2, /2+2, and the corresponding earth terminal blocks



# Cross connections

## Easy Bridge System

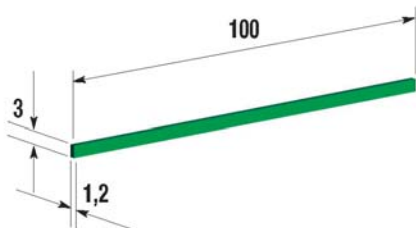

In badly lit panels it is not always immediate and easy to see where jumpers are inserted, except by paying great attention; and this can cause connection errors.

In order to solve this problem that Cabur has developed a marking strip to be used on its terminal blocks, where PTC jumpers are employed, this simplifies their localization, once inserted.

**Only one model (PTC/SP – Cat. No. PTC0990)** for all the terminal blocks has been developed, independently of the pitch or model of the PTC jumper being employed.



The marking strip must be fit in the jumper housing; its steadiness on the terminal block is guaranteed by the friction on the sides of the slots where the jumper is being inserted.

### HMM.2 terminal block application examples

The marking strip dimensions are studied so that it cannot exceed the profile of any terminal block on which it can be applied, in order to avoid problems with numbers, cables or other accessories.

The marking strip can be applied in case of double jumpers.



It should be noted that it is possible to apply the marking strip where other accessories are present, without having to extract it in advance.

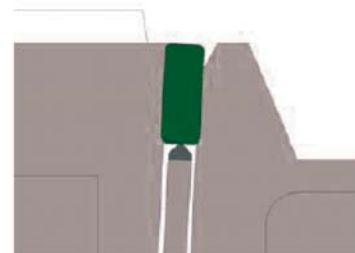

### Examples of application on the VPD.2 terminal block

The marker is produced in strips 100 mm long, and supplied in green. The user can customise the strips length freely, depending on his needs.

The strips, made of polyamide, can be easily cut by using common pliers, as they are only 1.20 mm thick.




NOTE. The PTC/SP marking strip can be applied on any terminal block where PTC jumpers are used (see the list), except for HCD.1 and HMD.2N terminal blocks: here the shape of the jumper housing is such as to prevent the frictioning, which is necessary to guarantee a steady positioning and avoid the marking strip loss. Moreover, the jumpers on these two terminal blocks have a less deep insertion than all the others and therefore the presence of the jumper can be recognized without the need of a signaler.

# Cross connections

## Easy Bridge System

In order to guarantee proper safety conditions, once the insertion is performed and depending on the various connection schemes, which can be obtained using PTC jumpers, the following table is supplied:

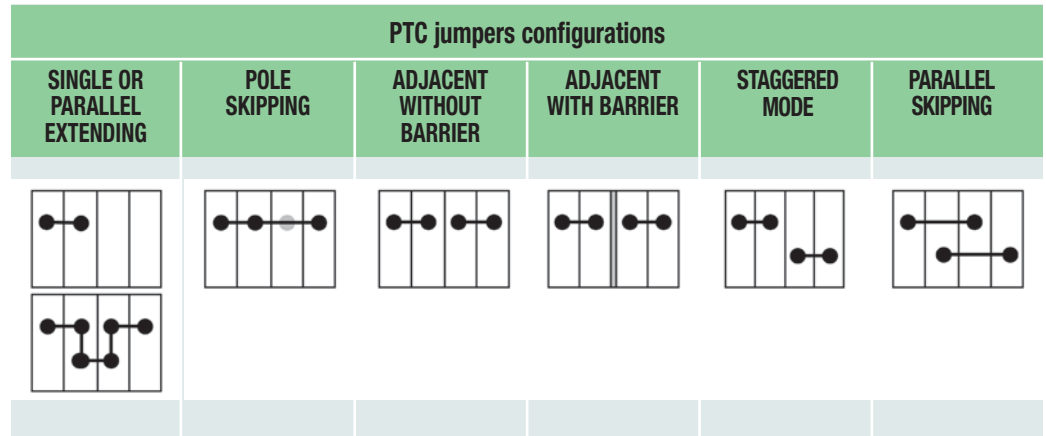

Terminal block	Jumper type	Insulation voltage in the above configurations (V)					
		630	500	-	500	500	500
CBC.2	PTC/2	630	630	-	500	500	500
CBC.4	PTC/4	630	500	-	500	500	500
CBC.6	PTC/6	630	630	-	630	630	500
CBC.10	PTC/10	800	630	-	630	800	500
VPC.2	PTC/2	320	320	-	320	320	320
HMFA.2 - HMS.2	PTC/3	630	500	-	500 (*)	-	-
Serie HMM.1	PTC/1	630	630	-	320	630	630
Serie HMM.2	PTC/3	630	500	-	500 (*)	630	630
Serie HMM.4	PTC/5	500	500	-	500 (*)	500	500
HMM.10	PTC/11	1000	1000	-	800	1000	1000
HMM.16	PTC/16	1000	1000	-	800	1000	800
DBC.2	PTC/2	630	500	-	250 (**)	500	500
HCD.1	PTC/2	630	500	-	630 (***)	500	500
HVC.2/GR	PTC/3	320	320	-	320	320	320
HVPC.2/GR	PTC/3	500	500	-	500 (*)	500	500
CHP.2/GR - CHP.2D/GR	PTC/11	500 (630)	500	-	400 (*)	-	-
HPP.2/GR - HP.2/GR	PTC/3	400	400	-	800 (PT)	500	400
HPC.2/GR	PTC/3	400	400	-	800 (PT)	400	400
SFR.6	PTC/20	630	630	400	630	630	500
MPS.4-MPFA.4	PTC/4	400	400	-	400	-	-
DSS.4-DSFA.4	PTC/4	400	400	-	400	-	-
HMD.1	PTC/1	500	500	-	320	500	500
VPD.2	PTC/2	320	320	-	320	320	320
HSCB.4	PTC/5	500	500	-	500 (*)	500	500
HSCB.6	PTC/8	500	500	-	400	500	500

Notes: (\*) with interposing end section  
 (\*\*) between lower adjoining jumpers (with partition)  
 (\*\*\*) between upper adjoining jumpers (with partition)




# Cross connections

For HMD.2, HMF.4 ed FDP.2 terminal blocks




PH jumper



Terminal block	Jumper type	Cat. No.
HMD.2	PH/2,5-4	PH100
HMF.4	PH/2,5-4	PH100
FDP.2	PH/2,5-4	PH100

When there is the need to perform the cross connection between adjoining terminal blocks of different types (size and function), and an end section is interposed between them, a special PHM/2.5-4 increased pitch jumper is available.

PHM jumper



Terminal block	Jumper type	Cat. No.
HMD.2	PHM/2,5/4	PHM01
HMF.4	PHM/2,5/4	PHM01
HMD.2	PHD/2	PHD02

NOTE:  
To complete the insertion of the jumpers, the use of screwdriver is necessary.


PHD/2 jumper



HMD.2/GR cat. no. HD100GR

## For mini spring-clamp terminal blocks

Terminal block	2-pole jumper		3-pole jumper		5-pole jumper	
	Type	Cat. No.	Type	Cat. No.	Type	Cat. No.
HP.2/P	PTC/2/02	PTC0202	PTC/2/03	PTC0203	PTC/2/05	PTC0205
HPC.2/P	PTC/2/02	PTC0202	PTC/2/03	PTC0203	PTC/2/05	PTC0205
HPP.2/P	PTC/2/02	PTC0202	PTC/2/03	PTC0203	PTC/2/05	PTC0205



# POF permanent cross connections

Allowing the cross connection of two adjacent terminal blocks. Mounted in a suitable position in order to prevent injuries



Each **POF** jumper is composed by:

- 2 screws
- 2 sleeves
- 1 plate with 2 holes


All the components are in brass, with nickel plating.

**NOTE:**  
For terminal blocks that normally require POF connections, where they are to be inserted in "increased safety" installations (Ex e), the use of **PFX** cross connections is required; they include an anti-loosening washer.

Terminal block	Jumper type	Cat. No.	Screw M x l (mm)	Sleeve Ø x l (mm)	Plate l x s (mm)
CBC.16	<b>POF/53</b>	POF53	M4 x 21	8 x 15	7 x 1,5
CBC.35	<b>POF/06</b>	POF06	M4 x 21	8 x 15	8 x 2
CBD.16	<b>POF/44</b>	POF44	M4 x 16	6 x 9,5	7 x 1,5
CBD.35	<b>POF/06</b>	POF06	M4 x 21	8 x 12	8 x 2
CBD.50	<b>POF/07</b>	POF07	M5 x 20	8 x 12	10 x 3
CBD.70	<b>POF/08</b>	POF08	M5 x 25	8 x 15	10 x 3
EDM.16	<b>POF/05</b>	POF05	M4 x 12	6 x 6,5	7 x 1,5
EDM.25	<b>POF/06</b>	POF06	M4 x 21	8 x 12	8 x 2
EDM.35	<b>POF/07</b>	POF07	M5 x 20	8 x 12	10 x 3
EDM.70	<b>POF/08</b>	POF08	M5 x 25	8 x 15	10 x 3
NCS	<b>POF/99</b>	POF99	M3 x 5	-	5,5 x 0,6
NCV	<b>POF/99</b>	POF99	M3 x 5	-	5,5 x 0,6
RFL.2	<b>POF/17</b>	POF17	M2,5 x 13,5	4 x 8	4 x 1
SCB.6	<b>POF/57</b>	POF57	M3,5 x 28	6 x 19	7 x 1
SCB.10	<b>POF/56</b>	POF56	M4,5 x 12	7 x 13,5	7 x 1,5
SCX.10	<b>POF/56</b>	POF56	M4,5 x 12	7 x 13,5	7 x 1,5
SFO.4	<b>POF/20</b>	POF20	M3 x 20	4 x 16	5,5 x 0,6
SV.2	<b>POF/11</b>	POF11	M2,5 x 13,5	4 x 10	5,5 x 0,6
SV.4	<b>POF/12</b>	POF12	M3 x 14	4 x 10	5,5 x 0,6
SV.6	<b>POF/13</b>	POF13	M3 x 20	5,5 x 13,5	7 x 1
SV.10	<b>POF/14</b>	POF14	M3,5 x 21	5,5 x 16	7 x 1,5
VL.16	<b>POF/55</b>	POF55	M4 x 12	6 x 6,5	8 x 2
VLM.10	<b>POF/54</b>	POF54	M4 x 12	5,5 x 7,5	7 x 1,5
GPM.95 (2 poli)	<b>POF/95/2</b>	P0952	M5 x 20	-	10 x 10
GPM.95 (3 poli)	<b>POF/95/3</b>	P0953	M5 x 20	-	10 x 10
GPM.150 (2 poli)	<b>POF/150/2</b>	P0152	M5 x 20	-	10 x 10
GPM.150 (3 poli)	<b>POF/150/3</b>	P0153	M5 x 20	-	10 x 10
GPM.240 (2 poli)	<b>POF/240/2</b>	P0242	M5 x 30	-	10 x 15
GPM.240 (3 poli)	<b>POF/240/3</b>	P0243	M5 x 30	-	10 x 15
GPA.70 - GPA.70/FIX	<b>POF/70</b>	POF70	M5 x 35	8 x 23,5	10 x 3

# PMP commoning bars

## CPM shunting screws and sleeves




The **PMP** commoning bar, suitable for the multiple cross connection of several terminal blocks, whether adjacent or not, is supplied in lengths of 250 mm, with holes adequately spaced according to the pitch of all terminal blocks.

The bar is supported and held in place by a special **CPM** screw and sleeve at the correct level of each element.

In the case the terminal boards are to be installed in (Ex e) "at increased safety" circuits, CPM screws and sleeves are equipped with unloosening washers and their part number becomes **CPX**.

Terminal block	Commoning bar		l x s mm	No. of holes (x 250 mm)	Screw/sleeve		Screw/sleeve (Ex e)	
	Type	Cat. No.			Type	Cat. No.	Type	Cat. No.
CBC.16	<b>PMP/05</b>	PMP05	7 x 1,5	21	<b>CPM/53</b>	CPM53	-	-
CBC.35	<b>PMP/06</b>	PMP06	8 x 2	16	<b>CPM/06</b>	CPM06	-	-
CBD.2	<b>PMP/01</b>	PMP01	5,5 x 0,6	45	<b>CPM/21</b>	CPM21	<b>CPX/21</b>	CPX21
CBD.4	<b>PMP/42</b>	PMP42	5,5 x 0,6	38	<b>CPM/12</b>	CPM12	<b>CPX/12</b>	CPX12
CBD.6	<b>PMP/13</b>	PMP13	7 x 1	31	<b>CPM/83</b>	CPM83	<b>CPX/83</b>	CPX83
CBD.10	<b>PMP/04</b>	PMP04	7 x 1,5	25	<b>CPM/03</b>	CPM03	<b>CPX/03</b>	CPX03
CBD.16	<b>PMP/05</b>	PMP05	7 x 1,5	21	<b>CPM/44</b>	CPM44	<b>CPX/44</b>	CPX44
CBD.35	<b>PMP/06</b>	PMP06	8 x 2	16	<b>CPM/06</b>	CPM06	<b>CPX/06</b>	CPX06
CBD.50	<b>PMP/07</b>	PMP07	10 x 3	14	<b>CPM/07</b>	CPM07	<b>CPX/05</b>	CPX05
CBD.70	<b>PMP/08</b>	PMP08	10 x 3	12	<b>CPM/08</b>	CPM08	<b>CPX/08</b>	CPX08
CBR.2	<b>PMP/25</b>	PMP25	5,5 x 0,6	50	<b>CPM/25</b>	CPM25	-	-
CVF.4	<b>PMP/58</b>	PMP58	5,5 x 0,6	42	<b>CPM/12</b>	CPM12	<b>CPX/12</b>	CPX12
DAS.4	<b>PMP/58</b>	PMP58	5,5 x 0,6	42	<b>CPM/01</b>	CPM01	<b>CPX/01</b>	CPX01
EDM.2	<b>PMP/01</b>	PMP01	5,5 x 0,6	45	<b>CPM/21</b>	CPM21	<b>CPX/21</b>	CPX21
EDM.4	<b>PMP/42</b>	PMP42	5,5 x 0,6	38	<b>CPM/12</b>	CPM12	<b>CPX/12</b>	CPX12
EDM.6	<b>PMP/13</b>	PMP13	7 x 1	31	<b>CPM/83</b>	CPM83	<b>CPX/83</b>	CPX83
EDM.10	<b>PMP/04</b>	PMP04	7 x 1,5	25	<b>CPM/03</b>	CPM03	<b>CPX/03</b>	CPX03
EDM.16	<b>PMP/05</b>	PMP05	7 x 1,5	21	<b>CPM/05</b>	CPM05	<b>CPX/05</b>	CPX05
EDM.25	<b>PMP/06</b>	PMP06	8 x 2	16	<b>CPM/06</b>	CPM06	<b>CPX/06</b>	CPX06
EDM.35	<b>PMP/07</b>	PMP07	10 x 3	14	<b>CPM/07</b>	CPM07	<b>CPX/07</b>	CPX07
EDM.70	<b>PMP/08</b>	PMP08	10 x 3	12	<b>CPM/08</b>	CPM08	<b>CPX/08</b>	CPX08
FFS.4	<b>PMP/42</b>	PMP42	5,5 x 0,6	38	<b>CPM/01</b>	CPM01	<b>CPX/01</b>	CPX01
FVS.4	<b>PMP/42</b>	PMP42	5,5 x 0,6	38	<b>CPM/01</b>	CPM01	<b>CPX/01</b>	CPX01
GPA.70 - GPA.70/FIX	<b>PMP/08</b>	PMP08	10 x 3	12	<b>CPM/70</b>	CPM70	-	-
MPS.2/SV-SW-SWP	<b>PMP/01</b>	PMP01	5,5 x 0,6	45	<b>CPM/11</b>	CPM11	<b>CPX/11</b>	CPX11
NCS	<b>PMP/02</b>	PMP02	5,5 x 0,6	40	<b>CPM/99</b>	CPM99	-	-
NCV	<b>PMP/02</b>	PMP02	5,5 x 0,6	40	<b>CPM/99</b>	CPM99	-	-
RFI.2	<b>PMP/17</b>	PMP17	4 x 1	42	<b>CPM/17</b>	CPM17	-	-
RN.1	<b>PMP/16</b>	PMP16	5,5 x 0,6	59	<b>CPM/16</b>	CPM16	-	-
RN.2	<b>PMP/25</b>	PMP25	5,5 x 0,6	50	<b>CPM/16</b>	CPM16	<b>CPX/16</b>	CPX16
RP.4	<b>PMP/58</b>	PMP58	5,5 x 0,6	42	<b>CPM/01</b>	CPM01	<b>CPX/01</b>	CPX01
SCB.4	<b>PMP/02</b>	PMP02	5,5 x 0,6	40	<b>CPM/01</b>	CPM01	<b>CPX/01</b>	CPX01
SCB.6	<b>PMP/13</b>	PMP13	7 x 1	31	<b>CPM/57</b>	CPM57	-	-
SCB.10	<b>PMP/13</b>	PMP13	7 x 1	31	<b>CPM/57</b>	CPM57	-	-
SCX.10	<b>PMP/56</b>	PMP56	7 x 1,5	24	<b>CPM/56</b>	CPM56	-	-
SFO.4	<b>PMP/20</b>	PMP20	5,5 x 0,6	31	<b>CPM/20</b>	CPM20	-	-
SV.2	<b>PMP/01</b>	PMP01	5,5 x 0,6	45	<b>CPM/11</b>	CPM11	<b>CPX/11</b>	CPX11
SV.4	<b>PMP/12</b>	PMP12	5,5 x 0,6	36	<b>CPM/12</b>	CPM12	<b>CPX/12</b>	CPX12
SV.6	<b>PMP/13</b>	PMP13	7 x 1,5	31	<b>CPM/13</b>	CPM13	<b>CPX/13</b>	CPX13
SV.10	<b>PMP/14</b>	PMP14	7 x 1,5	24	<b>CPM/14</b>	CPM14	<b>CPX/14</b>	CPX14
TDE.2	<b>PMP/02</b>	PMP02	5,5 x 0,6	40	<b>CPM/21</b>	CPM21	-	-
TLD.2	<b>PMP/02</b>	PMP02	5,5 x 0,6	40	<b>CPM/21</b>	CPM21	-	-
TLE.2	<b>PMP/02</b>	PMP02	5,5 x 0,6	40	<b>CPM/21</b>	CPM21	-	-
TLS.2	<b>PMP/02</b>	PMP02	5,5 x 0,6	40	<b>CPM/21</b>	CPM21	-	-
VL.16	<b>PMP/55</b>	PMP55	8 x 2	9	<b>CPM/05</b>	CPM05	<b>CPX/05</b>	CPX05
VLM.10	<b>PMP/54</b>	PMP54	7 x 1,5	38	<b>CPM/03</b>	CPM03	<b>CPX/03</b>	CPX03

# POS switchable cross connections

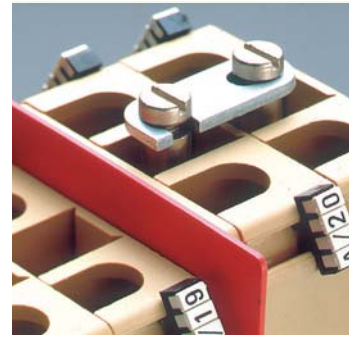

If the linking of adjacent terminal blocks is occasional, a **POS** switchable cross connection may be used; it consists of:

- 2 screws
- 2 sleeves
- 1 linking plate with open slot, allowing easy opening and closing of the cross connection.

Terminal block	Cross connection		Screw M x l (mm)	Sleeve Ø x l (mm)
	Type	Cat. No.		
CBC.16	POS/53	POS53	4 x 35	5,1 x 30
CBD.2	POS/11	POS11	2,5 x 22	4 x 18
CBD.4	POS/42	POS42	3 x 28	4 x 23
CBD.6	POS/93	POS93	3,5 x 27	5,5 x 21,5
CBD.10	POS/44	POS44	4 x 25	5,5 x 21,5
CBD.16	POS/44	POS44	4 x 25	5,5 x 21,5
CBD.35	POS/66	POS66	4 x 30	8 x 22
CBD.50	POS/07	POS07	5 x 30	8 x 23,5
CBD.70	POS/08	POS08	5 x 40	8 x 30
DAS.4	POS/43	POS43	3 x 20	4 x 16
EDM.2	POS/11	POS11	2,5 x 22	4 x 18
EDM.4	POS/42	POS42	3 x 28	4 x 23
EDM.6	POS/93	POS93	3,5 x 27	5,5 x 21,5
EDM.10	POS/44	POS44	4 x 25	5,5 x 21,5
EDM.16	POS/44	POS44	4 x 25	5,5 x 21,5
EDM.25	POS/66	POS66	4 x 30	8 x 22
EDM.35	POS/07	POS07	5 x 30	8 x 23,5
EDM.70	POS/08	POS08	5 x 40	8 x 30
FFS.4	POS/72	POS72	3 x 20	4 x 14,5
FVS.4	POS/72	POS72	3 x 20	4 x 14,5
MPS.2/SV-SW-SWP	POS/91	POS91	2,5 x 25	4 x 20
SV.2	POS/11	POS11	2,5 x 22	4 x 18
SV.4	POS/12	POS12	3 x 22	4 x 18
SV.6	POS/13	POS13	3 x 30	5,5 x 25
SV.10	POS/14	POS14	3,5 x 30	5,5 x 25
TLD.2	POS/41	POS41	2,5 x 16	4 x 12,7
TLS.2	POS/41	POS41	2,5 x 16	4 x 12,7
RP.4	POS/43	POS43	3 x 20	4 x 16

# Modular test plugs

Modular test plugs allow to perform final control or multiple shunting on rail assemblies.

The modular test plug can be placed directly in the housing provided in the terminal block.

The extreme ease of use, allow to assemble such test plugs in whatsoever number of poles, according to the needs.



## Modular test plugs for screw clamp terminal blocks

- with solder lug

**SDD/5** Cat. No. **DD005**

pitch 5.5 mm.  
for terminal blocks type CBD.2

**SDD/6** Cat. No. **DD006**

pitch 6.5 mm.  
for terminal blocks type CBD.4

- Screw-clamp

**SDC/5** Cat. No. **DC005**

pitch 5 mm.  
for terminal blocks type CBC.2

**SDC/5P** Cat. No. **DC05P**

version to be used with PTC jumper

**SDC/5V** Cat. No. **DC05V**

intermediate distancing element

**SDC/POL** Cat. No. **DCPOL**

polarising element

**SD5/PT** Cat. No. **DD501**

closing element for SDD/5

**SD6/PT** Cat. No. **DD601**

closing element for SDD/6

**SDC/6** Cat. No. **DC006**



pitch 6 mm.  
for terminal blocks type CBC.4

**SDC/6P** Cat. No. **DC06P**

version to be used with PTC jumper

**SDC/6V** Cat. No. **DC06V**

intermediate distancing element

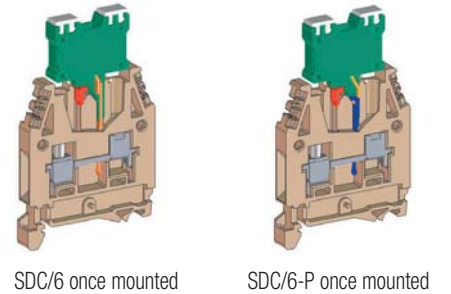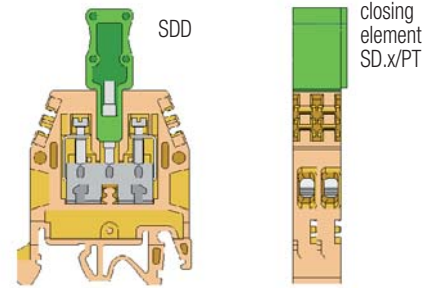

SDC/6 with cable composition

## Modular test plugs for spring clamp terminal blocks

- with solder lug

**SDH/4** Cat. No. **DH004**

pitch 4.2 mm.  
for terminal blocks type HMM.1, HMM.1/1+2,  
HMM.1/2+2, HMD.1

**SDH/5** Cat. No. **DH005**

pitch 5.2 mm.  
for terminal blocks type HMM.2 - HMM.2/1+2 -  
HMM.2/2+2 - HMD.2 - HMS.2 - Serie HP.2 - HP.2/P

**SDH/6** Cat. No. **DH006**

pitch 6.2 mm  
for terminal blocks type HMM.4


**SDH/7** Cat. No. **DH007**

pitch 5.2 mm  
for terminal blocks type HMD.2N/GR, HMD.2N/X/GR,  
HMD.2N/X1/GR

*SDH/5 and SDH/6 can be mutually combined.*

**SDH/4P** Cat. No. **DH04P**

version to be used with PTC jumper

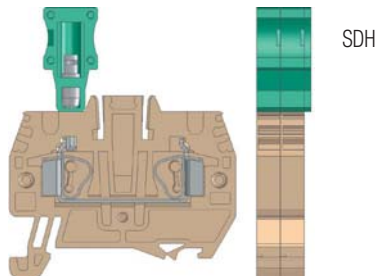

**SDH/7P** Cat. No. **DH07P**

version to be used with PTC jumper

**SH4/PT** Cat. No. **DH401**

closing element for SDH/4

**SH5/PT** Cat. No. **DH501**

closing element for SDH/5

**SH6/PT** Cat. No. **DH601**

closing element for SDH/6



**SH7/PT** Cat. No. **DH701**

closing element for SDH/7

# PSD sockets - SDD plugs

For measuring and testing circuits which are linked up to terminal boards, special accessories are provided; such as:

- **(PSD)** insulated sockets which can be screwed onto the conducting body of the terminal blocks
- **(SDD)** bundle-type plugs in silvered brass.

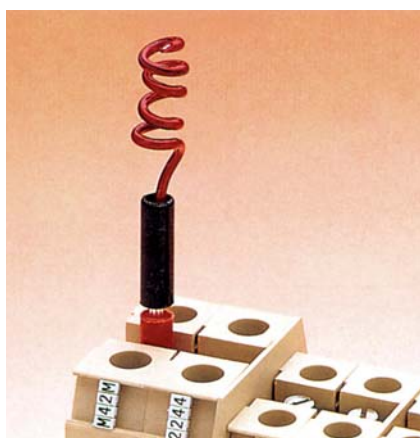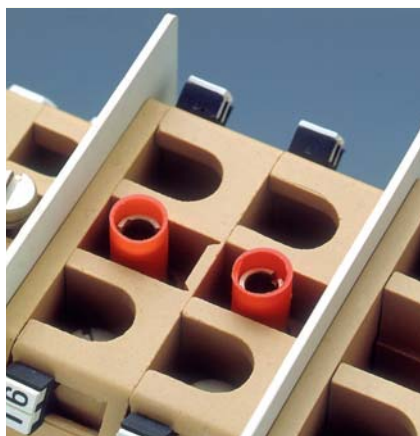

Terminal block	Socket		Internal socket Ø (mm)	Plug		Plug Ø (mm)
	Type	Cat. No.		Type	Cat. No.	
CBC.16	PSD/B	PD002	4,05	SDD/2	DD002	4
CBC.35	PSD/B	PD002	4,05	SDD/2	DD002	4
CBD.2	PSD/D	PD004	2,35	SDD/1	DD001	2,3
CBD.4	PSD/A	PD001	2,35	SDD/1	DD001	2,3
CBD.6	PSD/N	PD013	2,35	SDD/1	DD001	2,3
CBD.10	PSD/B	PD002	4,05	SDD/2	DD002	4
CBD.16	PSD/B	PD002	4,05	SDD/2	DD002	4
CBD.35	PSD/B	PD002	4,05	SDD/2	DD002	4
CBD.50	PSD/C	PD003	4,05	SDD/2	DD002	4
CBD.70	PSD/C	PD003	4,05	SDD/2	DD002	4
CBR.2	PSD/K	PD011	2,35	SDD/1	DD001	2,3
CVF.4	PSD/A	PD001	2,35	SDD/1	DD001	2,3
DAS.4	PSD/A	PD001	2,35	SDD/1	DD001	2,3
EDM.2	PSD/D	PD004	2,35	SDD/1	DD001	2,3
EDM.4	PSD/A	PD001	2,35	SDD/1	DD001	2,3
EDM.6	PSD/N	PD013	2,35	SDD/1	DD001	2,3
EDM.10	PSD/B	PD002	4,05	SDD/2	DD002	4
EDM.16	PSD/B	PD002	4,05	SDD/2	DD002	4
EDM.25	PSD/B	PD002	4,05	SDD/2	DD002	4
EDM.35	PSD/C	PD003	4,05	SDD/2	DD002	4
EDM.70	PSD/C	PD003	4,05	SDD/2	DD002	4
FDP.2	-	-	-	SDD/1	DD001	2,3
FFS.4	PSD/A	PD001	2,35	SDD/1	DD001	2,3
FPC.10	-	-	-	SDD/2	DD002	4
FVS.4	PSD/A	PD001	2,35	SDD/1	DD001	2,3
HMD.2	-	-	-	SDD/1	DD001	2,3
HMF.4	-	-	-	SDD/1	DD001	2,3
HMM.2	-	-	-	SDD/1	DD001	2,3
HMM.2/1+2	-	-	-	SDD/1	DD001	2,3
HMM.2/2+2	-	-	-	SDD/1	DD001	2,3
HMM.2/1+2/S	-	-	-	SDD/1	DD001	2,3
HMM.2/2+2/S	-	-	-	SDD/1	DD001	2,3
HMM.4	-	-	-	SDD/1	DD001	2,3
HMM.4/1+2	-	-	-	SDD/1	DD001	2,3
HMM.4/2+2	-	-	-	SDD/1	DD001	2,3
HMM.6	-	-	-	SDD/1	DD001	2,3
HMM.10	-	-	-	SDD/1	DD001	2,3
HMM.16	-	-	-	SDD/1	DD001	2,3
HMS.2	-	-	-	SDD/1	DD001	2,3
HTE.2	-	-	-	SDD/1	DD001	2,3
HSCB.6	PSD/O	PD017	2,35	SDD/1	DD001	2,3
HTE.2/1+2	-	-	-	SDD/1	DD001	2,3
HTE.2/2+2	-	-	-	SDD/1	DD001	2,3
HTE.4	-	-	-	SDD/1	DD001	2,3
HTE.6	-	-	-	SDD/1	DD001	2,3
HVPC.2	-	-	-	SDD/1	DD001	2,3
MAC.6	-	-	-	SDD/1	DD001	2,3
MPS.2	PSD/K	PD011	2,35	SDD/1	DD001	2,3
NCS	PSD/K	PD011	2,35	SDD/1	DD001	2,3
NCV	PSD/K	PD011	2,35	SDD/1	DD001	2,3
RN.1	PSD/K	PD011	2,35	SDD/1	DD001	2,3
RFI.2	PSD/K	PD011	2,35	SDD/1	DD001	2,3
RN.2	PSD/A	PD001	2,35	SDD/1	DD001	2,3
RP.4	PSD/A	PD001	2,35	SDD/1	DD001	2,3
SCB.4	PSD/A	PD001	2,35	SDD/1	DD001	2,3
SCB.6	PSD/P	PD015	4,05	SDD/2	DD002	4
SCB.10	PSD/P	PD015	4,05	SDD/2	DD002	4
SCX.10	PSD/L	PD009	4,05	SDD/2	DD002	4
SFC.10	-	-	-	SDD/2	DD002	4
SFO.4	PSD/J	PD014	2,35	SDD/1	DD001	2,3
SFR.4	PSD/J	PD014	2,35	SDD/1	DD001	2,3
SV.10	PSD/A	PD001	4,05	SDD/2	DD002	4
SV.2	PSD/D	PD004	2,35	SDD/1	DD001	2,3
SV.4	PSD/A	PD001	2,35	SDD/1	DD001	2,3
SV.6	PSD/E	PD005	2,35	SDD/1	DD001	2,3
TDE.2	PSD/D	PD004	2,35	SDD/1	DD001	2,3
TLD.2	PSD/D	PD004	2,35	SDD/1	DD001	2,3
TLE.2	PSD/D	PD004	2,35	SDD/1	DD001	2,3
TLS.2	PSD/D	PD004	2,35	SDD/1	DD001	2,3



# F5 fuses



In compliance with IEC 60127-2-1 – rapid fusion – 250 V in steatite tube filled with arc-quenching powder (breaking capacity 1500 A).

## F5 fuses characteristics according to DIN 41571

Rated current I <sub>n</sub>	Test current			
	1,5 x I <sub>n</sub>	2,1 x I <sub>n</sub>	4 x I <sub>n</sub>	10 x I <sub>n</sub>
100 mA ÷ 6.3 A	> 1 h	< 30 min	< 300 ms	< 20 ms

## F5 fuses characteristics according to IEC 127/I and II

Rated current I <sub>n</sub>	Test current				
	1,5 x I <sub>n</sub>	2,1 x I <sub>n</sub>	4 x I <sub>n</sub>	10 x I <sub>n</sub>	10 x I <sub>n</sub>
100 mA ÷ 6.3 A	> 1 h	< 30 min	100 ms ÷ 2 s	3 ms ÷ 300 ms	< 20 ms
4 A ÷ 6.3 A	> 1 h	< 30 min	19 ms ÷ 3 s	3 ms ÷ 300 ms	< 20 ms

Rated current	Ø 5 x 20 mm fuse without marking		
	Type	Cat. No.	
100 mA	<b>F5/100 mA</b>	FN001ST	
200 mA	<b>F5/200 mA</b>	FN002ST	
315 mA	<b>F5/315 mA</b>	FN003ST	
500 mA	<b>F5/500 mA</b>	FN004ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
630 mA	<b>F5/630 mA</b>	FN005ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
1 A	<b>F5/1 A</b>	FN006ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
1,6 A	<b>F5/1,6 A</b>	FN007ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
2 A	<b>F5/2 A</b>	FN008ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
2,5 A	<b>F5/2,5 A</b>	FN009ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
3,15 A	<b>F5/3,15 A</b>	FN010ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
4 A	<b>F5/4 A</b>	FN011ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
5 A	<b>F5/5 A</b>	FN012ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
6,3 A	<b>F5/6,3 A</b>	FN013ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
8 A	<b>F5/8 A</b>	FN014ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
10 A	<b>F5/10 A</b>	FN015ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A
12 A	<b>F5/12 A</b>	FN016ST	* RINA Homologation 5/18/75 - 220V - 50 Hz - 1500 A

# LSN torpedo pilot bulbs



Cat. No.	Characteristics
FL201	Ø 6x26 mm torpedo bulb, provided with built-in stabilising resistor, for voltages from 12 to 48 Vac, to be used on terminal blocks type FLD.10/F5L, FLD.10/F6, FPL.10.
FL202	Ø 6x26 mm torpedo bulb, provided with built-in stabilising resistor, for voltages from 70 to 380 Vac, to be used on terminal blocks type FLD.10/F5L, FLD.10/F6, FPL.10.
KIT1224	For terminal blocks type SFR.6 and SFR.6/M.
KIT70380	For terminal blocks type SFR.6 and SFR.6/M.

# LSH signal elements

For the blow-out status signal on fuse-holder terminal block type HMF4. Suited to be used in both d.c. and a.c. circuits.

Type	Cat. No.	Rated voltage [Vdc - Vac]	Current I r.m.s. [A] (*)
LSH/12	LS001	12	2,1 mA
LSH/24	LS002	24	2,0 mA
LSH/48	LS003	48	2,2 mA
LSH/115	LS004	115	2,1 mA
LSH/230	LS005	230	2,0 mA

# CL signal circuit



For the blow-out status signal of fuse-holder terminal blocks type SFR.4 - SFO.4 - MAC.6 - SFL.10 and FPL.10.

Suited to be used in both d.c. and a.c. circuits.

Each package is supplied with:

- two contact blades
- a non polarised LED microcircuit
- a transparent protection

Components must be mounted in such a sequence.

(\*) values are to be considered with a tolerance ±10%

Type	Cat. No.	Rated voltage [Vdc - Vac]	Current I r.m.s. [A] (*)
CIL/12	SF512	12	3,0 mA
CIL/24	SF524	24	3,2 mA
CIL/48	SF548	48	2,9 mA
CIL/115	SF515	115	2,3 mA
CIL/230	SF523	230	2,3 mA

# DFU-DFH-DFP partitions

In polyamide available in **green, red and white**, colour, 1.5 mm thick, for the separation of elements on the terminal board, in order to make certain circuits easy to locate or to increase the insulation distances between terminal blocks.

The partitions can also be used to increase the insulation distances between adjacent parallel multiple commoning bars.





NOTE:  
q dimension can be obtained by adding 4 mm to dimension p

Terminal block	Partition				Dimensions a x p	Terminal block	Partition				Dimensions a x p
	Type	White Cat. No.	Red Cat. No.	Green Cat. No.			Type	White Cat. No.	Red Cat. No.	Green Cat. No.	
<b>Screw-clamp terminal blocks</b>						SCB.6/CD	DFU/6	DU06B	DU06R	DU06V	72 x 74
AFO.2/1+1	DFU/1	DU01B	DU01R	DU01V	52 x 51	SCX.10	DFU/7	DU07B	DU07R	DU07V	80 x 64
AFO.2/2+2	DFU/1	DU01B	DU01R	DU01V	52 x 51	SFC.10	DFU/6	DU06B	DU06R	DU06V	72 x 74
CBC.2	DFU/4	DU04B	DU04R	DU04V	52 x 62	SFL.10	DFU/6	DU06B	DU06R	DU06V	72 x 74
CBC.4	DFU/4	DU04B	DU04R	DU04V	52 x 62	SFO.4	DFU/7	DU07B	DU07R	DU07V	80 x 64
CBC.6	DFU/4	DU04B	DU04R	DU04V	52 x 62	SFR.4	DFU/3	DU03B	DU03R	DU03V	68 x 57
CBC.10	DFU/4	DU04B	DU04R	DU04V	52 x 62	SFR.6	DFU/7	DU07B	DU07R	DU07V	80 x 64
CBC.16	DFU/4	DU04B	DU04R	DU04V	52 x 62	SV.2	DFU/4	DU04B	DU04R	DU04V	52 x 62
CBC.35	DFU/5	DU05B	DU05R	DU05V	62 x 68	SV.4	DFU/4	DU04B	DU04R	DU04V	52 x 62
CBD.2	DFU/1	DU01B	DU01R	DU01V	52 x 51	SV.6	DFU/4	DU04B	DU04R	DU04V	52 x 62
CBD.4	DFU/4	DU04B	DU04R	DU04V	52 x 62	SV.10	DFU/5	DU05B	DU05R	DU05V	62 x 68
CBD.6	DFU/4	DU04B	DU04R	DU04V	52 x 62	TC/DIN	DFU/1	DU01B	DU01R	DU01V	52 x 51
CBD.10	DFU/4	DU04B	DU04R	DU04V	52 x 62	TC/PO	DFU/1	DU01B	DU01R	DU01V	52 x 51
CBD.16	DFU/4	DU04B	DU04R	DU04V	52 x 62	TDE.2	DFU/3	DU03B	DU03R	DU03V	68 x 57
CBD.35	DFU/5	DU05B	DU05R	DU05V	62 x 68	TLD.2	DFU/3	DU03B	DU03R	DU03V	68 x 57
CBD.50	DFU/5	DU05B	DU05R	DU05V	62 x 68	TLE.2	DFU/3	DU03B	DU03R	DU03V	68 x 57
CBD.70	DFU/6	DU06B	DU06R	DU06V	72 x 74	TLS.2	DFU/3	DU03B	DU03R	DU03V	68 x 57
CBE.2	DFU/4	DU04B	DU04R	DU04V	52 x 62	VLM.10	DFU/3	DU03B	DU03R	DU03V	68 x 57
CBR.2	DFU/4	DU04B	DU04R	DU04V	52 x 62	VLM.10/0	DFU/3	DU03B	DU03R	DU03V	68 x 57
CVF.4	DFU/3	DU03B	DU03R	DU03V	68 x 57	VPC.2	DFU/5	DU05B	DU05R	DU05V	62 x 68
DAS.4	DFU/7	DU07B	DU07R	DU07V	80 x 64	VPD.2	DFU/7	DU07B	DU07R	DU07V	80 x 64
DBC.2	DFU/7	DU07B	DU07R	DU07V	80 x 64	<b>Spring-clamp terminal blocks</b>					
DSF.4	DFU/7	DU07B	DU07R	DU07V	80 x 64	HCD.1	DFU/7	DU07B	DU07R	DU07V	80 x 64
DSFA.4	DFU/7	DU07B	DU07R	DU07V	80 x 64	HMD.2	DFH/4	DH04B	DH04R	DH04V	97 x 51,5
DSS.4	DFU/7	DU07B	DU07R	DU07V	80 x 64	HFR.4	DFH/4	DH04B	DH04R	DH04V	97 x 51,5
EDM.2	DFU/1	DU01B	DU01R	DU01V	52 x 51	HFR.4/M	DFH/4	DH04B	DH04R	DH04V	97 x 51,5
EDM.4	DFU/4	DU04B	DU04R	DU04V	52 x 62	HMF.4	DFH/4	DH04B	DH04R	DH04V	97 x 51,5
EDM.6	DFU/4	DU04B	DU04R	DU04V	52 x 62	HMFA.2	DFH/2	DH02B	DH02R	DH02V	76 x 42,5
EDM.10	DFU/4	DU04B	DU04R	DU04V	52 x 62	HMM.2	DFH/1	DH01B	DH01R	DH01V	64 x 42,5
EDM.16	DFU/4	DU04B	DU04R	DU04V	52 x 62	HMM.2/1+2	DFH/2	DH02B	DH02R	DH02V	76 x 42,5
EDM.25	DFU/5	DU05B	DU05R	DU05V	62 x 68	HMM.2/2+2	DFH/3	DH03B	DH03R	DH03V	88 x 42,5
EDM.35	DFU/5	DU05B	DU05R	DU05V	62 x 68	HMM.2/2+2/S	DFH/3	DH03B	DH03R	DH03V	88 x 42,5
EDM.70	DFU/6	DU06B	DU06R	DU06V	72 x 74	HMM.4	DFH/1	DH01B	DH01R	DH01V	64 x 42,5
FDP.2	DFU/5	DU05B	DU05R	DU05V	62 x 68	HMM.4/1+2	DFH/4	DH04B	DH04R	DH04V	97 x 51,5
FLD.10/...	DFU/6	DU06B	DU06R	DU06V	72 x 74	HMM.4/2+2	DFH/4	DH04B	DH04R	DH04V	97 x 51,5
FPC.10	DFU/6	DU06B	DU06R	DU06V	72 x 74	HMM.6	DFH/1	DH01B	DH01R	DH01V	64 x 42,5
FPL.10	DFU/6	DU06B	DU06R	DU06V	72 x 74	HMM.10	DFH/4	DH04B	DH04R	DH04V	97 x 51,5
FVS.4	DFU/6	DU06B	DU06R	DU06V	72 x 74	HMM.16	DFH/4	DH04B	DH04R	DH04V	97 x 51,5
MPFA.4	DFU/3	DU03B	DU03R	DU03V	68 x 57	HVPC.2	DFH/1	DH01B	DH01R	DH01V	64 x 42,5
MPS.2/SV	DFU/2	DU02B	DU02R	DU02V	52 x 54	HMS.2	DFH/2	DH02B	DH02R	DH02V	76 x 42,5
MPS.2/SW	DFU/2	DU02B	DU02R	DU02V	52 x 54	HPP.2	DFP/2	DFP2B	DFP2R	DFP2V	37 x 38
MPS.2/SWP	DFU/2	DU02B	DU02R	DU02V	52 x 54	HPP.2/P	DFP/2	DFP2B	DFP2R	DFP2V	37 x 38
MPS.4	DFU/3	DU03B	DU03R	DU03V	80 x 64	HTE.2	DFH/1	DH01B	DH01R	DH01V	64 x 42,5
MPS.4/SV	DFU/3	DU03B	DU03R	DU03V	80 x 64	HTE.2/1+1	DFH/2	DH02B	DH02R	DH02V	76 x 42,5
NCS	DFU/2	DU02B	DU02R	DU02V	52 x 54	HTE.2/2+2	DFH/3	DH03B	DH03R	DH03V	88 x 42,5
NCV	DFU/2	DU02B	DU02R	DU02V	52 x 54	HTE.4	DFH/1	DH01B	DH01R	DH01V	64 x 42,5
PDF.2	DFU/5	DU05B	DU05R	DU05V	62 x 68	HTE.6	DFH/1	DH01B	DH01R	DH01V	64 x 42,5
RFL.2	DFP/2	DFP2B	DFP2R	DFP2V	37 x 38	HMM.1	DFH/1	DH01B	DH01R	DH01V	64 x 42,5
RN.1	DFP/2	DFP2B	DFP2R	DFP2V	37 x 38	HMM.1/1+2	DFH/3	DH03B	DH03R	DH03V	88 x 42,5
RN.2	DFP/2	DFP2B	DFP2R	DFP2V	37 x 38	HMM.1/2+2	DFH/2	DH02B	DH02R	DH02V	76 x 42,5
RP.4	DFP/2	DFP2B	DFP2R	DFP2V	37 x 38	HMD.1	DFU/7	DU07B	DU07R	DU07V	80 x 64
SCB.4	DFU/3	DU03B	DU03R	DU03V	68 x 57	HMD.2N	DFU/7	DU07B	DU07R	DU07V	80 x 64
SCB.6	DFU/6	DU06B	DU06R	DU06V	72 x 74	HMM.2/1+2/S	DFH/2	DH02B	DH02R	DH02V	76 x 42,5
SCB.6/DD	DFU/6	DU06B	DU06R	DU06V	72 x 74	HSCB.4	DFH/4	DH04B	DH04R	DH04V	97 x 51,5
SCB.10	DFU/7	DU07B	DU07R	DU07V	80 x 64	HTE.1	DFH/1	DH01B	DH01R	DH01V	64 x 42,5
SCB.10/CD	DFU/7	DU07B	DU07R	DU07V	80 x 64	HTE.1/1+2	DFH/2	DH02B	DH02R	DH02V	76 x 42,5
SCB.10/DD	DFU/7	DU07B	DU07R	DU07V	80 x 64	HTE.1/2+2	DFH/3	DH03B	DH03R	DH03V	88 x 42,5

# Partitions

## DFM

Red coloured in polyamide when it is necessary to **guarantee the insulation distance between permanent or switchable cross connections**, inserted between adjacent pairs of terminal blocks and, similarly, between **multiple commoning bars**, inserted between adjacent groups of terminal blocks.

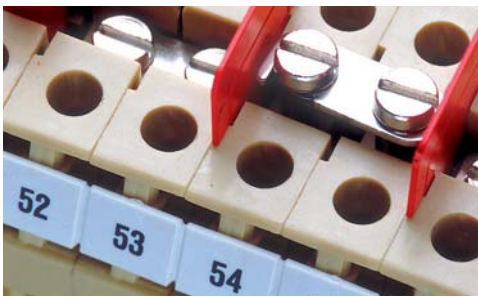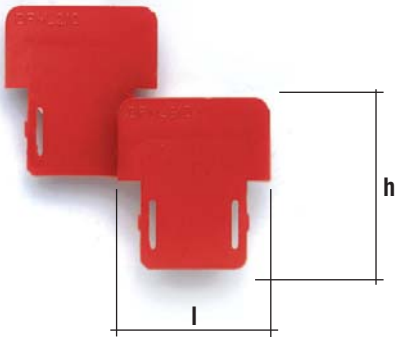

Terminal block	Partition		Dimensions l x h	Thickness mm
	Type	Cat. No.		
CBC.2	DFM/900	DF900	17 x 18	0,5
	DFM/800	DF800	11 x 18	0,5
CBC.4	DFM/900	DF900	17 x 18	0,5
	DFM/800	DF800	11 x 18	0,5
CBC.6	DFM/900	DF900	17 x 18	0,5
	DFM/800	DF800	11 x 18	0,5
CBC.10	DFM/900	DF900	17 x 18	0,5
	DFM/800	DF800	11 x 18	0,5
CBC.16	DFM/700	DF700	28 x 32	0,5
CBC.35	DFM/700	DF700	28 x 32	0,5
CBD.2	DFM/600	DF600	24 x 31	0,5
CBD.4	DFM/600	DF600	24 x 31	0,5
	DFM/600	DF600	24 x 31	0,5
CBD.10	DFM/700	DF700	28 x 32	0,5
	DFM/700	DF700	28 x 32	0,5
CBD.16	DFM/700	DF700	28 x 32	0,5
	DFM/700	DF700	28 x 32	0,5
CBD.35	DFM/700	DF700	28 x 32	0,5
	DFM/700	DF700	28 x 32	0,5
CBD.50	DFM/700	DF700	28 x 32	0,5
	DFM/700	DF700	28 x 32	0,5
DBC.2	DFM/900	DF900	17 x 18	0,5
	DFM/800	DF800	17 x 18	0,5
DSS.4	DFM/500	DF500	4,6 x 13,5	0,5
	DFM/500	DF500	4,6 x 13,5	0,5
DSFA.4	DFM/500	DF500	4,6 x 13,5	0,5
HDE.2	DFM/500	DF500	4,6x13,5	0,5
HLD.2	DFM/500	DF500	4,6x13,5	0,5
HMM.1	DFM/500	DF500	4,6 x 13,5	0,5
HMM.1/1+2	DFM/500	DF500	4,6 x 13,5	0,5
HMM.1/2+2	DFM/500	DF500	4,6 x 13,5	0,5
HMD.1	DFM/500	DF500	4,6 x 13,5	0,5
HMD.2/N	DFM/500	DF500	4,6 x 13,5	0,5
MPS.4	DFM/500	DF500	4,6 x 13,5	0,5
MPFA.4	DFM/500	DF500	4,6 x 13,5	0,5
TLD.2	DFM/400	DF400	10 x 18	0,5
TLS.2	DFM/400	DF400	10 x 18	0,5
VPC.2	DFM/300	DF300	9,4 x 12,9	0,4
VPD.2	DFM/300	DF300	9,4 x 12,9	0,4

# Protection covers

## PRT covers / SPS supports



(\*) vertical dimensions including rail

For protection against accidental contacts or tampering of CDA, ACB series terminal blocks. Of self-extinguishing and transparent material, 2.3 mm pitch and 200 mm standard length (corresponding to a total width of four adjacent terminal blocks).

Covers are available in three sizes:

**PRT/P** 22 x 125 mm (Cat.No. PRT01)  
- for the protection of ACB/BB terminal blocks

**PRT/M** 50 x 125 mm (Cat.No. PRT02)  
- for the protection of ACB/CC terminal blocks  
- for the protection of CDA terminal blocks.

**PRT/G** 85 x 125 mm (Cat.No. PRT03)  
- to be used when conductors are arriving from the rear of the panel or when not connected clamping units must be protected.

PRT covers should be inserted on **SPS** supports, manufactured of self-extinguishing UL94V-0 classed ABS, 5 mm pitch, interposed between adjacent terminal blocks. Protection of the four adjacent terminal blocks is performed by means of **two** overlapped PRT covers.

**Note:** The ID Cat. No. (i.e. PRT01) is **referred** to a single item.

# PZM protection covers and PZD supports

Terminal blocks having a cross-section up to 70 mm<sup>2</sup> can be protected against accidental contacts or tampering, by means of a **PVC** transparent cover, **supplied in a standard length of 2 m**, to be mounted on appropriate polyamide supports and to be inserted on PR/DIN, PR/3, "G32" type and TH/35 mounting rails. They can be fixed by sealing the support ends.

**PZM.4 cover** (a = 64+2 mm / b = 32 mm)  
Cat. No. **PZ330**

Suitable for terminal blocks with **overall dimension up to approximately 58 mm** (mounting rail included).


To be mounted with **PZD.4/SO** supports (Cat. No. PZ331)

Maximum dimension PZM.4 + PZD.4/SO

- on IEC 60715/G32 mounting rail = 70 or 82 mm (\*)

- on IEC 60715/TH35 mounting rail = 65 or 77 mm (\*)

(\*) depending on the notches used, upper or lower.

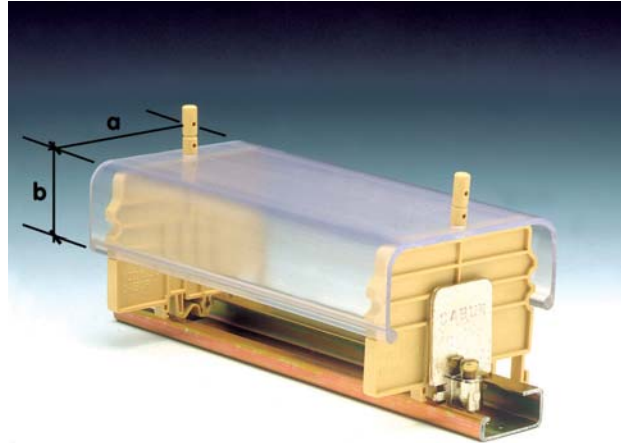

PZM.4 - PZM.6 covers

**PZM.6 cover** (a = 85+2 mm / b = 36 mm)  
Cat. No. **PZ110**

Suitable for terminal blocks with **overall dimension over 58 mm**, (mounting rail included).


To be mounted with **PZD.6/SO** supports (Cat. No. PZ112)

Maximum dimension PZM.6 + PZD.6/SO

- on IEC 60715/G32 mounting rail = 82 or 94 mm (\*)

- on IEC 60715/TH35 mounting rail = 78 or 90 mm (\*)

(\*) depending on the notches used, upper or lower.

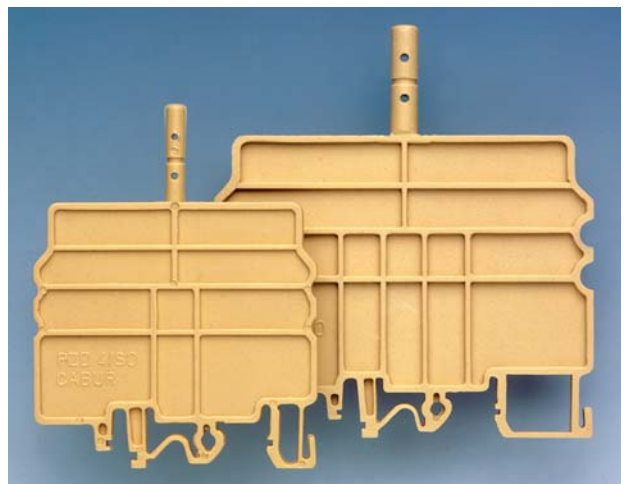

PZD.4/SO - PZD.6/SO supports

## PRP protections

The cross connection, consisting of a PMP multiple commoning bar and CPM screws and sleeves, already placed in a recessed position with respect to the terminal board, can be further protected from accidental contact using a nylon U-shaped cover having a standard length of 10 cm. This white-coloured cover, can also be written upon, to serve as a label or reference point on the terminal board.

On the cover suitable slits are arranged to facilitate its removal by using a screwdriver.

for terminal blocks with a cross section of 2,5-4 mm<sup>2</sup>

**PRP/6**

Cat. No. **PRP06**

for terminal blocks with a cross section of 4-16 mm<sup>2</sup>

**PRP/7**

Cat. No. **PRP07**

for terminal blocks with a cross section of 25-70 mm<sup>2</sup>


**PRP/8**

Cat. No. **PRP08**

for terminal blocks type TLD.2-TLS.2-CBR.2-DAS.4-TLE.2-TDE.2

**PRP/5**  
**(red, blue, white)**

Cat. No. **PRP05**

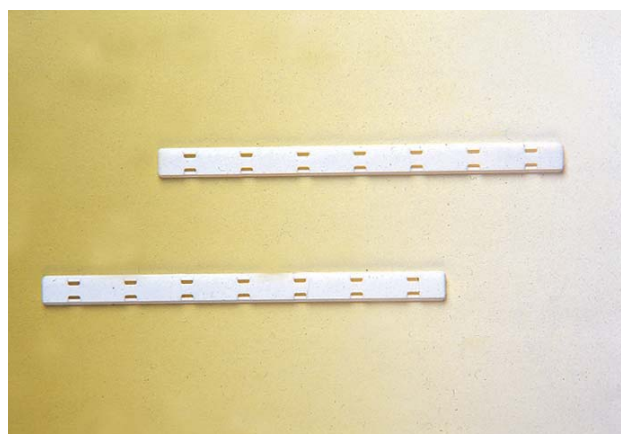

PRP protections

# Warning plates

## TQM-TTM-TUM-PRP/7/G

Made of self-extinguishing material, they are suitable to ensure operating safety on terminal blocks connected to live circuits.

Cabur warning plates bear signals and warning writings that can be fitted on top of the blocks by means of nylon screws. They are available in several models with various sizes depending on the types of terminal blocks.

Warning plates can cover three or four poles; in some cases the three pole plate is obtained from the four pole version by removing a pre-cut part.

For CBC. 2-4-6-10 terminal blocks screwless PRP/7/G is supplied, to be inserted in the cross connection groove.



Terminal block	Warning plate for 3 terminal blocks		l x h mm	Warning plate for 4 terminal blocks		l x h mm	Screw M x l (mm)
	Type	Cat. No.		Type	Cat. No.		
CBC.2	PRP/7/G (*)	PRP070G	l = 100	PRP/7/G (*)	PRP070G	100	-
CBC.4	PRP/7/G (*)	PRP070G	l = 100	PRP/7/G (*)	PRP070G	100	-
CBC.6	PRP/7/G (*)	PRP070G	l = 100	PRP/7/G (*)	PRP070G	100	-
CBC.10	PRP/7/G (*)	PRP070G	l = 100	PRP/7/G (*)	PRP070G	100	-
CBC.16	TUM/16	TUM16	48 x 34	TUM/16	TUM16	48 x 34	4 x 30
CBC.35	TUM/06	TUM06	63 x 34	TUM/06	TUM06	63 x 34	4 x 30
CBD.2	-	-	-	TQM/02	TQM02	25 x 26	2,5 x 20
CBD.4	TTM/12	TTM12	25 x 26	TTM/12	TTM12	25 x 26	3 x 25
CBD.6	TTM/15	TTM15	25 x 26	TQM/15	TQM15	32 x 26	3,5 x 25
CBD.10	TTM/04	TTM04	32 x 26	TQM/04	TQM04	40 x 26	4 x 25
CBD.16	TUM/05	TUM05	48 x 34	TUM/05	TUM05	48 x 34	4 x 25
CBD.35	TUM/06	TUM06	63 x 34	TUM/06	TUM06	63 x 34	4 x 30
CBD.50	TUM/07	TUM07	72 x 42	TUM/07	TUM07	72 x 42	5 x 30
CBD.70	TUM/08	TUM08	82 x 42	TUM/08	TUM08	82 x 42	5 x 40
EDM.2	-	-	-	TQM/02	TQM02	25 x 26	2,5 x 20
EDM.4	TTM/12	TTM12	25 x 26	TTM/12	TTM12	25 x 26	3 x 25
EDM.6	TTM/15	TTM15	25 x 26	TQM/15	TQM15	32 x 26	3,5 x 25
EDM.10	-	-	-	TQM/04	TQM04	40 x 26	4 x 25
EDM.16	TUM/05	TUM05	48 x 34	TUM/05	TUM05	48 x 34	4 x 25
EDM.25	TUM/06	TUM06	63 x 34	TUM/06	TUM06	63 x 34	4 x 30
EDM.35	TUM/07	TUM07	72 x 42	TUM/07	TUM07	72 x 42	5 x 30
EDM.70	TUM/08	TUM08	82 x 42	TUM/08	TUM08	82 x 42	5 x 40
SV.2	-	-	-	TQM/02	TQM02	25 x 26	2,5 x 20
SV.4	TTM/12	TTM12	25 x 26	TQM/12	TQM12	40 x 26	3,5 x 30
SV.6	TTM/13	TTM13	25 x 26	TQM/13	TQM13	25 x 26	2,5 x 20
SV.10	TTM/14	TTM14	32 x 26	TQM/14	TQM14	25 x 26	3 x 15

(\*) to be cut to length



## TAI

Possible danger status may be marked using **special triangular self-adhesive labels**

**TAI/6** (Cat. No. TA001)

**TAI/12** (Cat. No. TA002)


to be applied on safety and protection covers.

## MSM handle

For the simultaneous disconnection of adjoining FPL.10 and SFL.10 terminal blocks.

Supplied in strips of 6 elements.

**MSM** (Cat. No. FC103)

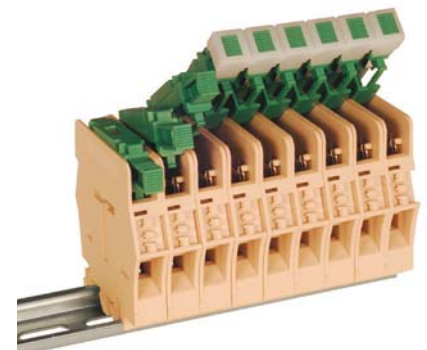

# Speed Rail

## Windows™ application for terminal blocks for rails and panels type SWSR1.0 - Cat. No. SWSR1

- intuitive interface
- computer-assisted design
- 3D display
- no CAD platform required
- automatic creation of the Bill of Materials in table format and Adobe® Acrobat® PDF
- option to request an estimate with a single click
- trial version can be downloaded from the website
- licensed for installation on 5 PCs

Speed Rail is a software application designed to simplify and speed up the construction of a terminal board using Cabur terminal blocks.




Thanks to the **intuitive interface** and the **graphic elements**, Speed Rail is easy to use and does not require specialist computer skills;




furthermore, the software guides and assists you throughout every stage of the terminal board's design:

- automatically removes and adds end sections as needed to protect uncovered contacts or places them where insulation needs to be maintained;
- automatically includes cross-connection barriers between adjacent connections;
- reports the danger of short-circuit and suggests positioning an end section or cross-connection barrier;
- arranges connections in the best possible way to ensure maximum insulation.

Speed Rail helps you **plan** your terminal board **quickly and efficiently**, starting from the holes in the mounting rail and the arrangement of supports, through to inserting terminal blocks, marking, creating connections between terminal blocks, adding the protection cover, covering each and every detail even up to inserting modular test plugs and derivation socket plugs.

Thanks to the **3D visualization**, you can see you terminal board from every angle, as if it were in your hands, and watch every phase of its development.

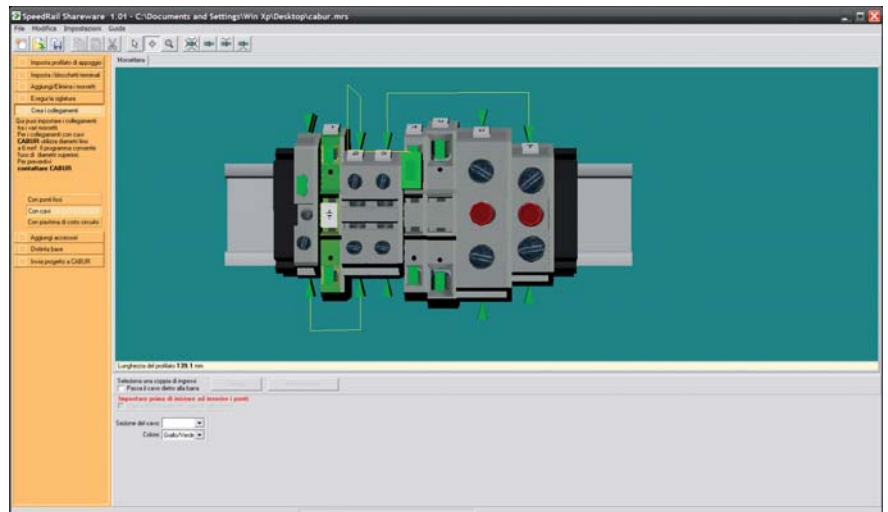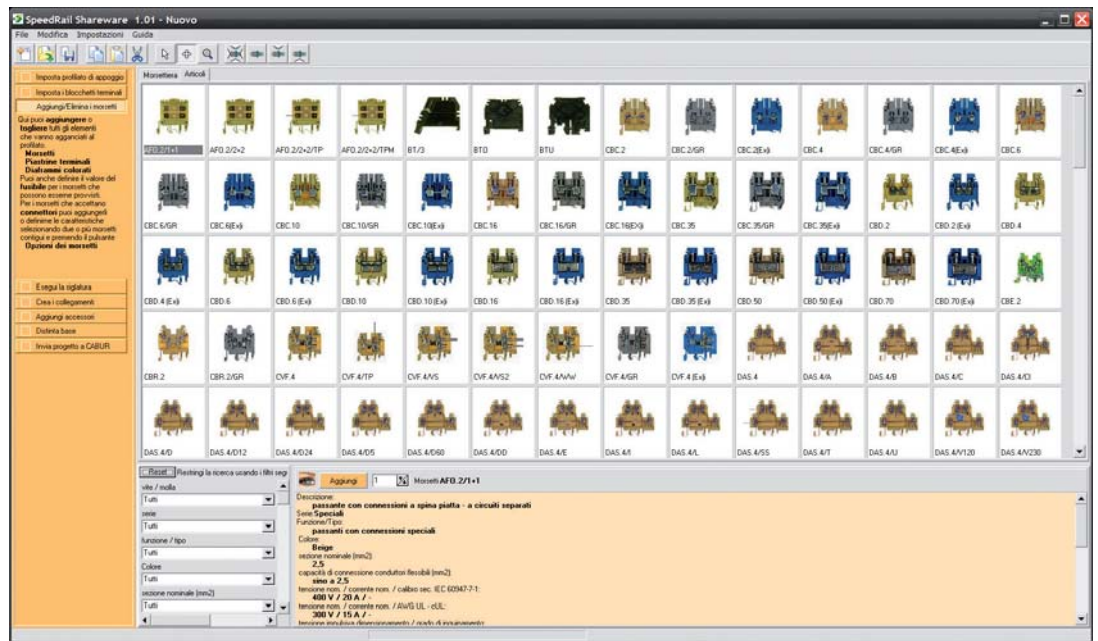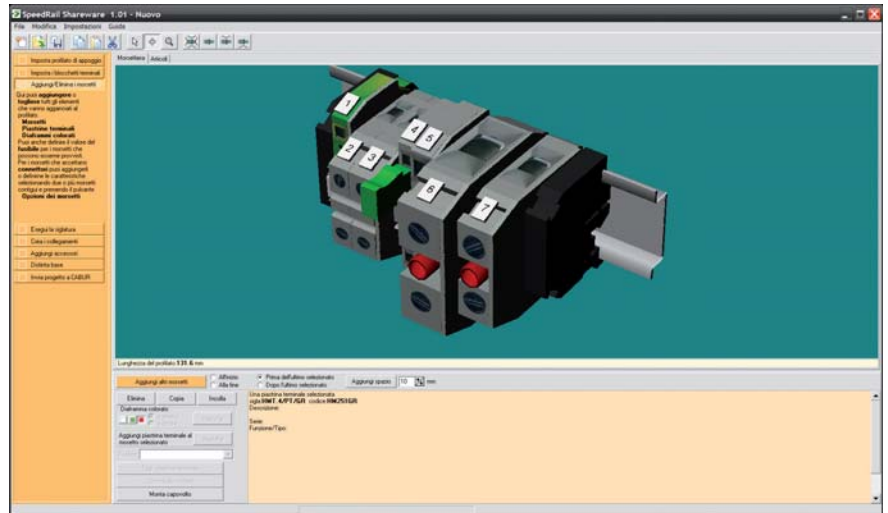

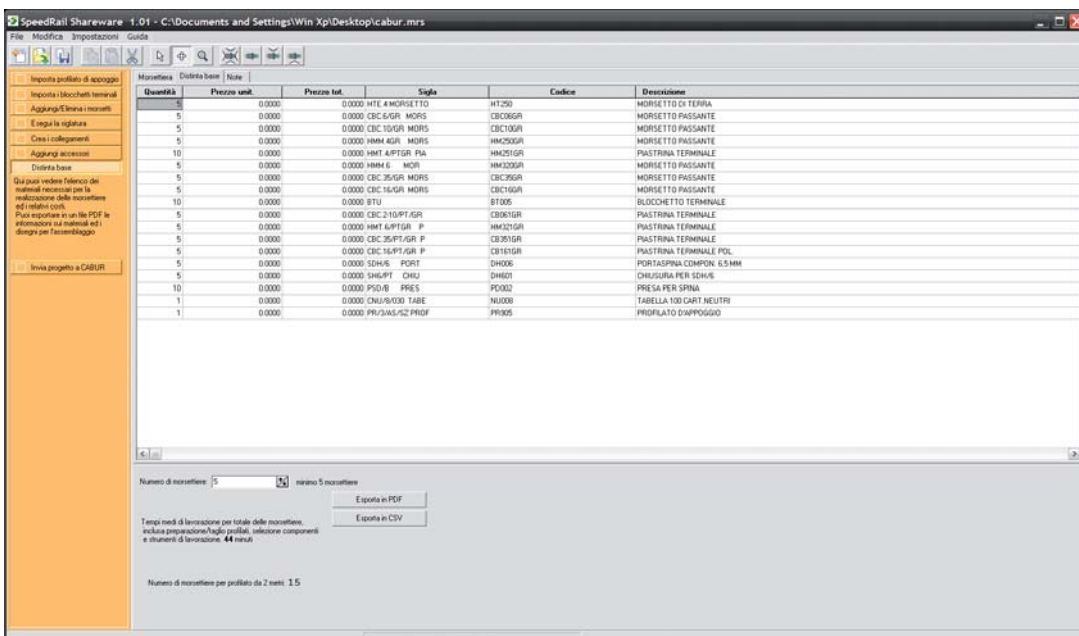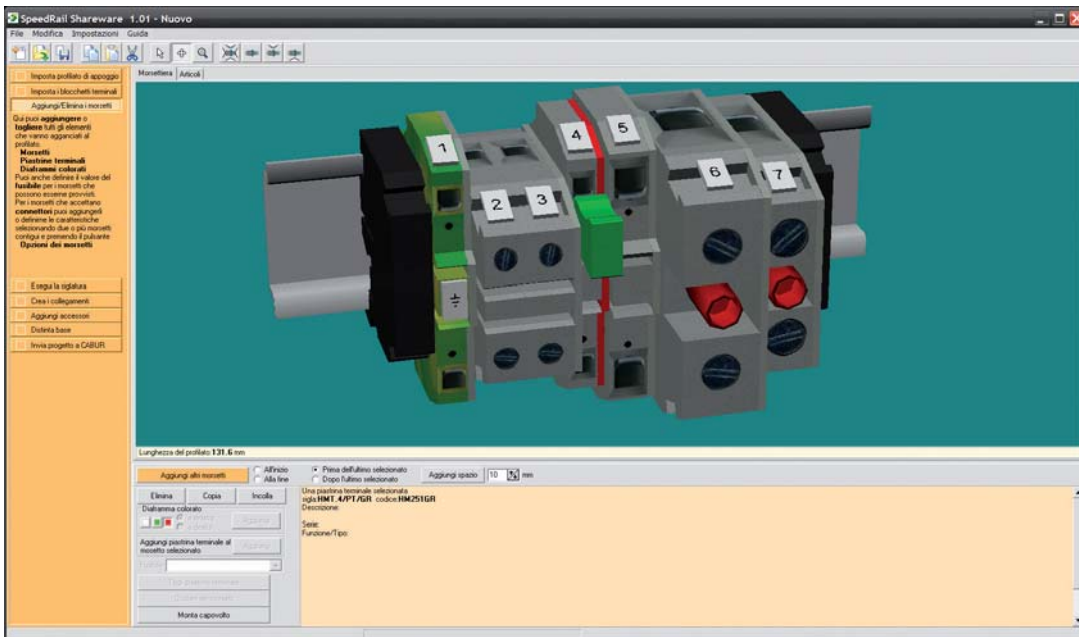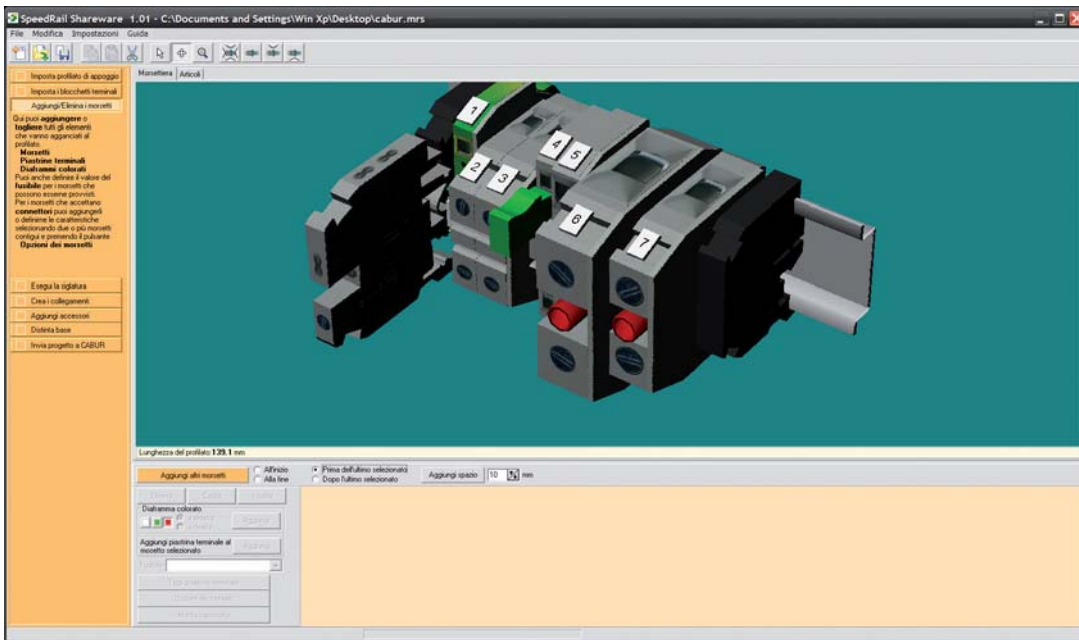

You can easily choose the terminal blocks best suited to your requirements, thanks to the technical data integrated into the software. Once you have identified the terminal blocks, Speed Rail will guide you through the choice of accessories, saving you time from searching for codes and verifying compatibility in catalogues.

Once all the details have been defined, Speed Rail will **automatically produce a bill of materials** in PDF format – even specifying the details and characteristics of the accessories, the marking, the terminal blocks used and the support mounting rail arrangements. You will be able to **request an estimate immediately** for the products needed and/or the terminal board assembly service.

A **trial version**, valid for 30 days, for complete, effective use of the software can be downloaded free of charge from the website [www.cabur.eu](http://www.cabur.eu)

Please note the following limitations:

- trial period limited to 30 days of effective use for a maximum of 90 days as from the date of installation
- on-line updates are disabled

### Technical requirements for installation:

Platform: PC with Microsoft® Windows™ XP or later operating system.

Min. 512 MB RAM.

Hard disk space: 50 MB for basic installation, 155 MB for full installation (inc. video tutorials for software use).

Video viewer: Microsoft® Windows™ Media Player or compatible.

# Marking systems

## MarKing Pro

### Marking system for Cabur's terminal blocks Type SWMP1.0 - Cat. No. SWMP1

- user-friendly interface
- rapid marking realization
- software versatility
- it can work on plotters/already installed systems (it does not require new printers)
- possibility to ask for the marking service in a rapid and efficient way
- license for installation on 5 workstations/PC




MarKing Pro is an applicative software conceived for the marking of terminal blocks produced by Cabur.

The software, **easy to use and extremely versatile**, allows to set the parameters for the marking, by using sequences of characters and symbols which can be varied according to the specific user's needs, and to print on Cabur's cards (type **CNU/8**, **CNU/10** and **SHZ/1**) which can be selected from a database inside the software.

MarKing Pro system is **conceived to fit to the most common plotters on sale**, thanks to **plates** that allow to fit to Cabur's marking formats.

To ensure an instant usability of MarKing Pro solution, **the software is provided with the related adaptation plate**, selected on the basis of end Customer's specific needs.

Thanks to the **user-friendly interface** and to the graphic elements, MarKing Pro is easy to use and allows to see the final result before the printing and it does not require particular computer skills. Furthermore, Cabur offers a **service of marking realization** which

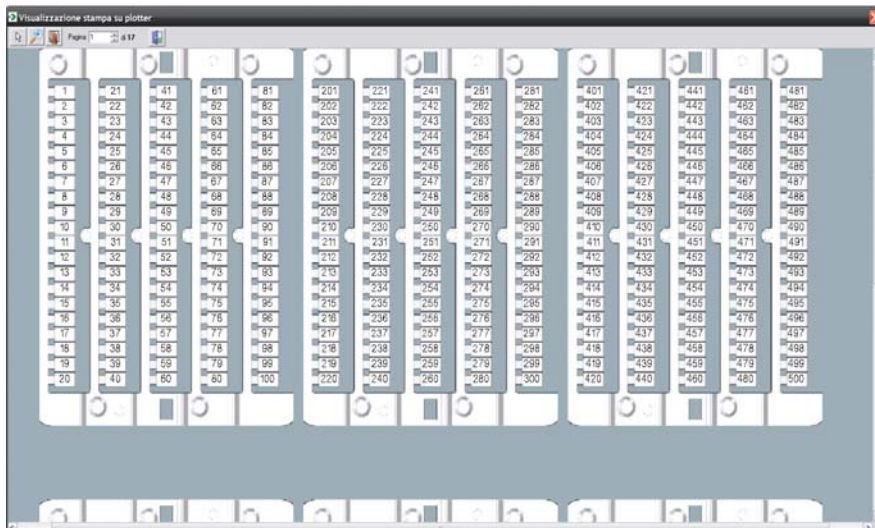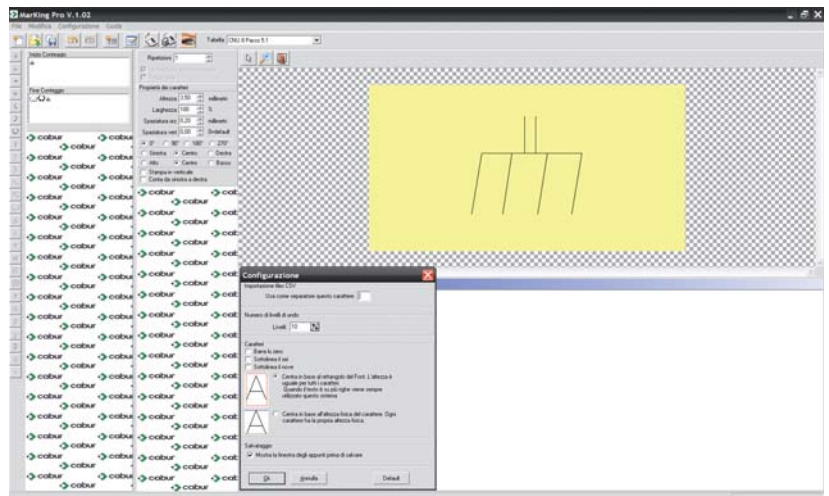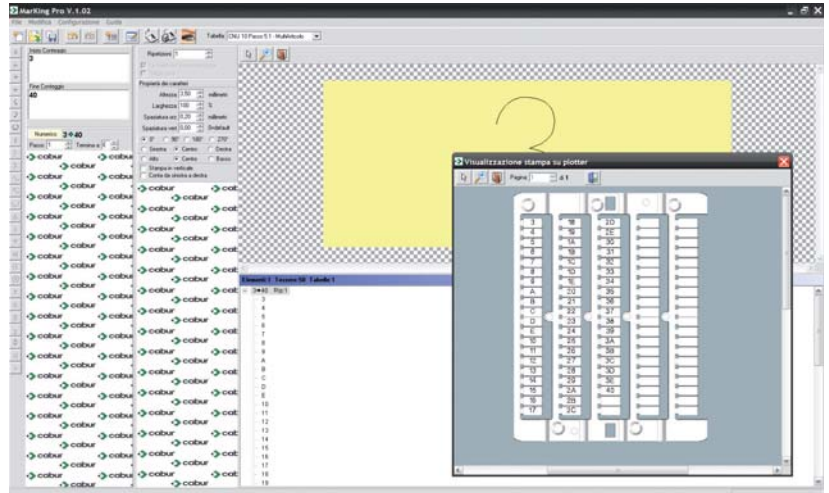

can be provided on the basis of the files created by the Customer by using MarKing Pro. If you send your MarKing Pro files to Cabur, you will get an offer and a service as efficient as possible and with a sure result.

#### Technical requirements for installation:

Platform:

PC with operating system MS Windows XP or later.

Min. 512 MB RAM

Hard disk space:

7,5 MB for basic installation, 4 MB for help installation in any language.



# Cabur Plotter System

Cat. No. KSLOTTER

The CABURPLOT system consists of a flatbed A3 plotter which, **on a single plate**, lets you print on:

- sleeve tags to identify cables
- tags for terminal blocks
- tags for push-buttons
- tags for contactors
- modular strips for electrical distribution panels
- panel identification tags

The aluminium frame and innovative design, as opposed to other solutions available on the market, make CABURPLOT a leading, state-of-the-art system. Compared to similar products, CABURPLOT pens last longer. In addition to the classic, anti-dry pen, we've added an extra feature built into the system: a **special airtight pen holder**, which prevents accidental tampering and laborious manual operations outside the system.



## TECHNICAL DATA

- Type: flat base plotter
- Printing area: 440 x 305 mm
- Pen holder: 4
- Power supply: separate power supply unit
- Input voltage: 100 – 240 V A.C. 50 – 60 Hz
- Output Voltage: 24 V D.C.
- PC interface: parallel and USB 1.1
- Dimensions: 660 x 440 x 125 mm
- Weight: 8 Kg

## The package includes:

- 1 KSLOTTER plotter + power supply unit + parallel cable + USB cable
- 1 code adaptation plate PADCABUR
- 1 anti-dry pen, diameter 0.35 mm
- 1 pack of 5 indelible black ink cartridges
- 1 MarKing Pro Software on CD, including a licence for 5 installations and complete user manual in electronic format

## Accessories


Cat. No.	Description
PADCABUR	Adaptation plate for KSLOTTER plotter
PADGRAPH	Adaptation plate for Graphtec plotter
PADMUTHO	Adaptation plate for MUTOH plotter
PENO25CAB	Anti-dry pen for plotter – diameter 0.25 mm
PENO35CAB	Anti-dry pen for plotter – diameter 0.35 mm
PENO35GRA	Anti-dry pen for Graphtec plotter – diameter 0.25 mm
INKCART5	Indelible ink (5 cartridges per pack)
INKBOTT1	30 ml bottle of ink
KITPULIZIA	Pen cleaning kit
POMPASP	Pen reactivator



## PLOTTER PLATES


Cat. No.	Type	Descrizione
ADRKITEK	KITCABUREK	MarKing Pro SW + EK-TEAM VP-500 plotter plate
ADRKITGR	KITCABURBG	MarKing Pro SW + GRAPHTEC plotter plate
ADRKITMU	KITCABURMU	MarKing Pro SW + MUTOH IP-220 plotter plate

## MOUNTING ON CABUR TERMINAL BLOCKS

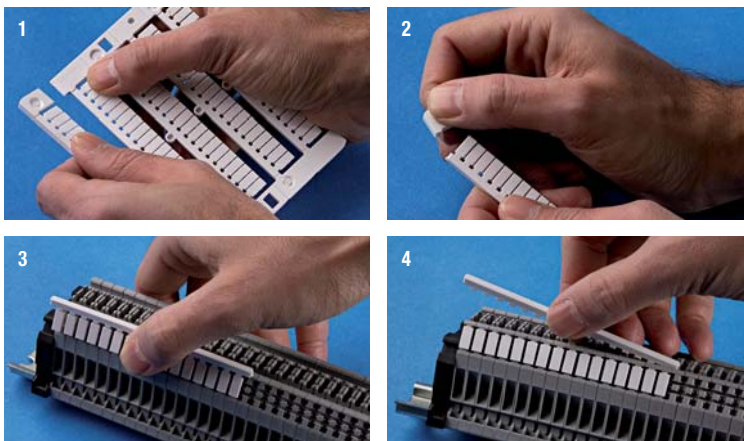

## BLANK PLOTTER TAGS

Type	Cat. No.	Tag length	Tags for module/pk	Terminal blocks series
CNU/8/51	NU0851	8 mm	100/1500	CBC.2, HMM.2
CNU/8/61	NU0861	8 mm	80/1200	CBC.4, HMM.4
CNU/10/51	NU1051	10 mm	100/1500	CBC.2, HMM.2
CNU/10/61	NU1061	10 mm	80/1200	CBC.4, HMM.4
SHZ.1	SH004	10 mm	100/1500	HMM.1

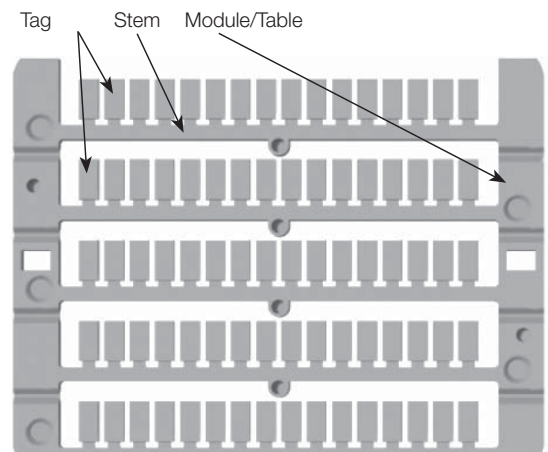

# CNU/8/51 Writing type HORIZONTAL / VERTICAL

- Marking tags suitable for **marking all types of terminal blocks (screw-clamp and spring-clamp)** in tables of 100 elements in packs of 500 tags
- In white polycarbonate with black printing, to be applied directly into position either before or after preparing the terminal board
- **Tag dimensions: 8 x 5.1 mm. Pitch on CBC.2 and HMM.2/GR**
- **Mounting of single tag on all Cabur terminal blocks**


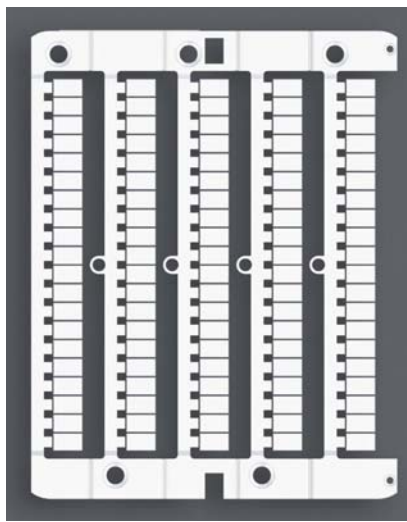


Table **CNU/8/51** Cat. No. NU0851


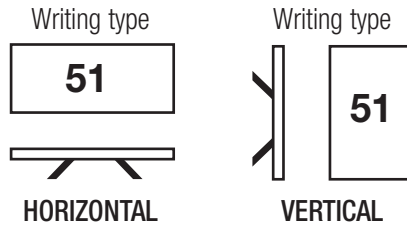


Note: those shown in the tables are the standard types of markers that are normally available; on request, we can supply tags of all types with: numbers, letters, symbols and customised logos. Please see page 167 for more details.

OLD CAT. NO.	DESCRIPTION	CAT. NO. TAGS WITH VERTICAL NUMBERS	CAT. NO. TAGS WITH HORIZONTAL NUMBERS	TAGS PER PACK
NU008	CNU/8/030 blank tags	NU0851	NU0851	500
N8000	CNU/8/000 tags 0	NU08510V	NU08510	500
N8001	CNU/8/001 tags with no. from 1 to 50	NU0855001V	NU0855001	500
N8010	CNU/8/010 tags with no. 10	NU0851010V	NU0851010	500
N8013	CNU/8/013 tags R	NU0851RV	NU0851R	500
N8014	CNU/8/014 tags S	NU0851SV	NU0851S	500
N8015	CNU/8/015 tags T	NU0851TV	NU0851T	500
N8016	CNU/8/016 tags N	NU0851NV	NU0851N	500
N8017	CNU/8/017 tags U	NU0851UV	NU0851U	500
N8018	CNU/8/018 tags V	NU0851VV	NU0851V	500
N8019	CNU/8/019 tags W	NU0851WV	NU0851W	500
N8020	CNU/8/020 tags X	NU0851XV	NU0851X	500
N8021	CNU/8/021 tags Y	NU0851YV	NU0851Y	500
N8022	CNU/8/022 tags Z	NU0851ZV	NU0851Z	500
N8023	CNU/8/023 tags +	NU085111V	NU0851111	500
N8024	CNU/8/024 tags -	NU085112V	NU085112	500
N8025	CNU/8/025 tags =	NU085110V	NU085110	500
N8027	CNU/8/027 tags earth	NU085114V	NU085114	500
N8028	CNU/8/028 tags earth circle	NU085115V	NU0851115	500
N802A	CNU/8/2A tags with 2A	NU085102AV	NU085102A	500
N8031	CNU/8/031 tags A	NU0851AV	NU0851A	500
N8032	CNU/8/032 tags B	NU0851BV	NU0851B	500
N8033	CNU/8/033 tags C	NU0851CV	NU0851C	500
N8034	CNU/8/034 tags D	NU0851DV	NU0851D	500
N8035	CNU/8/035 tags E	NU0851EV	NU0851E	500
N8036	CNU/8/036 tags F	NU0851FV	NU0851F	500
N8037	CNU/8/037 tags G	NU0851GV	NU0851G	500
N8038	CNU/8/038 tags H	NU0851HV	NU0851H	500
N8043	CNU/8/043 tags I	NU0851IV	NU0851I	500
N8044	CNU/8/044 tags L	NU0851LV	NU0851L	500
N8045	CNU/8/045 tags M	NU0851MV	NU0851M	500
N8046	CNU/8/046 tags O	NU0851OV	NU0851O	500
N8047	CNU/8/047 tags P	NU0851PV	NU0851P	500
N8048	CNU/8/048 tags Q	NU0851QV	NU0851Q	500
N8049	CNU/8/049 tags J	NU0851JV	NU0851J	500
N8050	CNU/8/050 tags K	NU0851KV	NU0851K	500
N8051	CNU/8/051 tags with no. from 51 to 500	NU0851051V	NU0851051	500
N80L1	CNU/8/L1 tags with L1	NU08510L1V	NU08510L1	500
N80L2	CNU/8/L2 tags with L2	NU08510L2V	NU08510L2	500
N80L3	CNU/8/L3 tags with L3	NU08510L3V	NU08510L3	500
N80NI	CNU/8/NI tags with NI	NU08510NIV	NU08510NI	500
N80PE	CNU/8/PE tags with PE	NU08510PEV	NU08510PE	500
N80R1	CNU/8/R1 tags with R1	NU08510R1V	NU08510R1	500
N80S1	CNU/8/S1 tags with S1	NU08510S1V	NU08510S1	500
N80S2	CNU/8/S2 tags with S2	NU08510S2V	NU08510S2	500
N80S3	CNU/8/S3 tags with S3	NU08510S3V	NU08510S3	500
N80U1	CNU/8/U1 tags with U1	NU08510U1V	NU08510U1	500
N80U2	CNU/8/U2 tags with U2	NU08510U2V	NU08510U2	500
N80V1	CNU/8/V1 tags with V1	NU08510V1V	NU08510V1	500
N80V2	CNU/8/V2 tags with V2	NU08510V2V	NU08510V2	500
N80W1	CNU/8/W1 tags with W1	NU08510W1V	NU08510W1	500
N80W2	CNU/8/W2 tags with W2	NU08510W2V	NU08510W2	500
N8101	CNU/8/101 tags with no. from 101 to 150	NU0851101V	NU0851101	500
N8111	CNU/8/111 tags 1	NU08511V	NU08511	500
N8151	CNU/8/151 tags with no. from 151 to 200	NU0851151V	NU0851151	500
N8201	CNU/8/201 tags with no. from 201 to 250	NU0851201V	NU0851201	500
N8222	CNU/8/222 tags 2	NU08512V	NU08512	500

# CNU/8/51 Writing type HORIZONTAL / VERTICAL

- Marking tags suitable for **marking all types of terminal blocks (screw-clamp and spring-clamp)** in tables of 100 elements in packs of 500 tags
- In white polycarbonate with black printing, to be applied directly into position either before or after preparing the terminal board
- **Tag dimensions: 8 x 5.1 mm. Pitch on CBC.2 and HMM.2/GR**
- **Mounting of single tag on all Cabur terminal blocks**

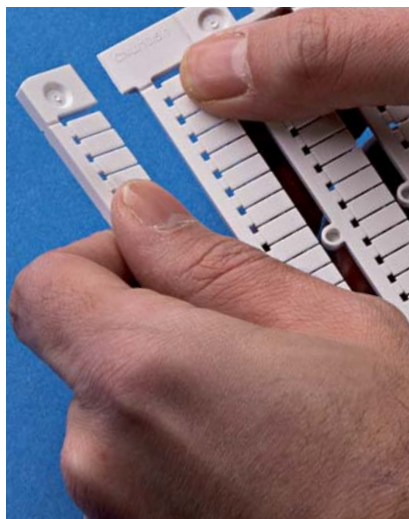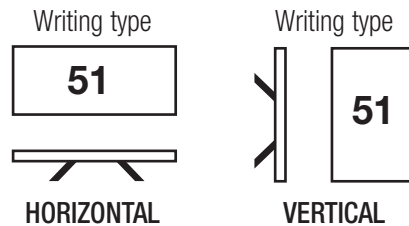

Mounting on cabur terminal blocks.



OLD CAT. NO.	DESCRIPTION	CAT. NO. TAGS WITH VERTICAL NUMBERS	CAT. NO. TAGS WITH HORIZONTAL NUMBERS	TAGS PER PACK
<b>N8251</b>	CNU/8/251 tags with no. from 251 to 300	NU0851251V	NU0851251	500
<b>N8301</b>	CNU/8/301 tags with no. from 301 to 350	NU0851301V	NU0851301	500
<b>N8333</b>	CNU/8/333 tags 3	NU08513V	NU08513	500
<b>N8351</b>	CNU/8/351 tags with no. from 351 to 400	NU0851351V	NU0851351	500
<b>N8401</b>	CNU/8/401 tags with no. from 401 to 450	NU0851401V	NU0851401	500
<b>N8444</b>	CNU/8/444 tags 4	NU08514V	NU08514	500
<b>N8451</b>	CNU/8/451 tags with no. from 451 to 500	NU0851451V	NU0851451	500
<b>N8501</b>	CNU/8/501 tags with no. from 501 to 550	NU0851501V	NU0851501	500
<b>N8510</b>	CNU/8/510 tags with no. from 1 to 10	NU0851510V	NU0851510	500
<b>N8520</b>	CNU/8/520 tags with no. from 11 to 20	NU0851520V	NU0851520	500
<b>N8530</b>	CNU/8/530 tags with no. from 21 to 30	NU0851530V	NU0851530	500
<b>N8540</b>	CNU/8/540 tags with no. from 31 to 40	NU0851540V	NU0851540	500
<b>N8550</b>	CNU/8/550 tags with no. from 41 to 50	NU0851550V	NU0851550	500
<b>N8551</b>	CNU/8/551 tags with no. from 551 to 600	NU0851551V	NU0851551	500
<b>N8555</b>	CNU/8/555 tags 5	NU08515V	NU08515	500
<b>N8560</b>	CNU/8/560 tags with no. from 51 to 60	NU0851560V	NU0851560	500
<b>N8570</b>	CNU/8/570 tags with no. from 61 to 70	NU0851570V	NU0851570	500
<b>N8580</b>	CNU/8/580 tags with no. from 71 to 80	NU0851580V	NU0851580	500
<b>N8590</b>	CNU/8/590 tags with no. from 81 to 90	NU0851590V	NU0851590	500
<b>N8600</b>	CNU/8/600 tags with no. from 91 to 500	NU0851600V	NU0851600	500
<b>N8601</b>	CNU/8/601 tags with no. from 601 to 650	NU0851601V	NU0851601	500
<b>N8651</b>	CNU/8/651 tags with no. from 651 to 700	NU0851651V	NU0851651	500
<b>N8666</b>	CNU/8/666 tags 6	NU08516V	NU08516	500
<b>N8701</b>	CNU/8/701 tags with no. from 701 to 750	NU0851701V	NU0851701	500
<b>N8751</b>	CNU/8/751 tags with no. from 751 to 800	NU0851751V	NU0851751	500
<b>N8777</b>	CNU/8/777 tags 7	NU08517V	NU08517	500
<b>N8801</b>	CNU/8/801 tags with no. from 801 to 850	NU0851801V	NU0851801	500
<b>N8851</b>	CNU/8/851 tags with no. from 851 to 900	NU0851851V	NU0851851	500
<b>N8888</b>	CNU/8/888 tags 8	NU08518V	NU08518	500
<b>N8901</b>	CNU/8/901 tags with no. from 901 to 950	NU0851901V	NU0851901	500
<b>N8912</b>	CNU/8/12 tags with no. 12	NU0851012V	NU0851012	500
<b>N8951</b>	CNU/8/951 tags with no. from 951 a5000	NU0851951V	NU0851951	500
<b>N8999</b>	CNU/8/999 tags 9	NU08519V	NU08519	500
<b>N8Y11</b>	CNU/8/11 tags with no. 11	NU0851011V	NU0851011	500
<b>N8Y13</b>	CNU/8/13 tags with no. 13	NU0851013V	NU0851013	500
<b>N8Y14</b>	CNU/8/14 tags with no. 14	NU0851014V	NU0851014	500
<b>N8Y15</b>	CNU/8/15 tags with no. 15	NU0851015V	NU0851015	500
<b>N8Y16</b>	CNU/8/16 tags with no. 16	NU0851016V	NU0851016	500
<b>N8Y17</b>	CNU/8/17 tags with no. 17	NU0851017V	NU0851017	500
<b>N8Y18</b>	CNU/8/18 tags with no. 18	NU0851018V	NU0851018	500
<b>N8Y19</b>	CNU/8/19 tags with no. 19	NU0851019V	NU0851019	500
<b>N8Y20</b>	CNU/8/20 tags with no. 20	NU0851020V	NU0851020	500

# CNU/5

Marking tags suited for marking **BPL.4** and **TPL.4** modular terminal blocks. Tables of 100 elements.

In white polyamide with black printing, to be applied directly into position either before or after the composition of the terminal assembly.

**5 mm** standardised pitch and **5 mm** high.



CNU/5/123 table

Cat. No. N5123

Marking	Table type (100 elements)	Cat. No.
blank	<b>CNU/5/030</b>	NU005
1-10 (10 Series)	<b>CNU/5/110</b>	N5110
1-50 (2 Series)	<b>CNU/5/250</b>	N5250
51-100 (2 Series)	<b>CNU/5/350</b>	N5350
N	<b>CNU/5/016</b>	N5016
R	<b>CNU/5/017</b>	N5017
S	<b>CNU/5/018</b>	N5018
T	<b>CNU/5/015</b>	N5015
+	<b>CNU/5/023</b>	N5023
-	<b>CNU/5/024</b>	N5024
~	<b>CNU/5/025</b>	N5025
⊥	<b>CNU/5/026</b>	N5026
⊕	<b>CNU/5/027</b>	N5027
=	<b>CNU/5/029</b>	N5029
1-2-3-4-5-6-7-8-9-10	<b>CNU/5/123</b>	N5123

## Numbering strips

### SHZ for spring-clamp terminal blocks


Marking	SHZ/1(*)		SHZ/2 (*)	
	Type	Cat. No.	Type	Cat. No.
Blank	SHZ/1/00	SH004	SHZ/2/00	SH001
From da 1 to 9	SHZ/1/19	SH419	SHZ/2/19	SH119
Strip marked A (1)	SHZ/1/AA	SH4AA	SHZ/2/AA	SH1AA
Strip marked B (1)	SHZ/1/BB	SH4BB	SHZ/2/BB	SH1BB
Strip marked C (1)	SHZ/1/CC	SH4CC	SHZ/2/CC	SH1CC
Strip marked D (1)	SHZ/1/DD	SH4DD	SHZ/2/DD	SH1DD
Strip marked E (1)	SHZ/1/EE	SH4EE	SHZ/2/EE	SH1EE
Strip marked F (1)	SHZ/1/FF	SH4FF	SHZ/2/FF	SH1FF
Strip marked G (1)	SHZ/1/GG	SH4GG	SHZ/2/GG	SH1GG
Strip marked H (1)	SHZ/1/HH	SH4HH	SHZ/2/HH	SH1HH
Strip marked I (1)	SHZ/1/II	SH4II	SHZ/2/II	SH1II
Strip marked J (1)	SHZ/1/JJ	SH4JJ	SHZ/2/JJ	SH1JJ
Strip marked K (1)	SHZ/1/KK	SH4KK	SHZ/2/KK	SH1KK
Strip marked L (1)	SHZ/1/LL	SH4LL	SHZ/2/LL	SH1LL
Strip marked M (1)	SHZ/1/MM	SH4MM	SHZ/2/MM	SH1MM
Strip marked N (1)	SHZ/1/NN	SH4NN	SHZ/2/NN	SH1NN
Strip marked O (1)	SHZ/1/OO	SH4OO	SHZ/2/OO	SH1OO
Strip marked P (1)	SHZ/1/PP	SH4PP	SHZ/2/PP	SH1PP
Strip marked Q (1)	SHZ/1/QQ	SH4QQ	SHZ/2/QQ	SH1QQ
Strip marked R (1)	SHZ/1/RR	SH4RR	SHZ/2/RR	SH1RR
Strip marked S (1)	SHZ/1/SS	SH4SS	SHZ/2/SS	SH1SS
Strip marked T (1)	SHZ/1/TT	SH4TT	SHZ/2/TT	SH1TT
Strip marked U (1)	SHZ/1/UU	SH4UU	SHZ/2/UU	SH1UU
Strip marked V (1)	SHZ/1/VV	SH4VV	SHZ/2/VV	SH1VV
Strip marked W (1)	SHZ/1/WW	SH4WW	SHZ/2/WW	SH1WW
Strip marked X (1)	SHZ/1/XX	SH4XX	SHZ/2/XX	SH1XX
Strip marked Y (1)	SHZ/1/YY	SH4YY	SHZ/2/YY	SH1YY
Strip marked Z (1)	SHZ/1/ZZ	SH4ZZ	SHZ/2/ZZ	SH1ZZ
Strip marked =	SHZ/1/G1	SH4G1	SHZ/2/G1	SH1G1
Strip marked +	SHZ/1/G2	SH4G2	SHZ/2/G2	SH1G2
Strip marked -	SHZ/1/G3	SH4G3	SHZ/2/G3	SH1G3
Strip marked ~	SHZ/1/G4	SH4G4	SHZ/2/G4	SH1G4
Strip marked ⊥	SHZ/1/G5	SH4G5	SHZ/2/G5	SH1G5
Strip marked ⊕	SHZ/1/G6	SH4G6	SHZ/2/G6	SH1G6
Strip marked ÷	SHZ/1/G7	SH4G7	SHZ/2/G7	SH1G7
Strip marked /	SHZ/1/G8	SH4G8	SHZ/2/G8	SH1G8
Strip marked (	SHZ/1/G9	SH4G9	SHZ/2/G9	SH1G9

### SNZ.4 for screw-clamp terminal blocks RN.1

Marking	SNZ/4	
	Type	Cat. No.
Blank	SNZ/4/00	SN008
From da 1 to 9	SNZ/4/19	SN819



SHZ numbering strips can be mounted on the sides of the terminal block or in the appropriate housings provided in the upper part of the terminal block itself.

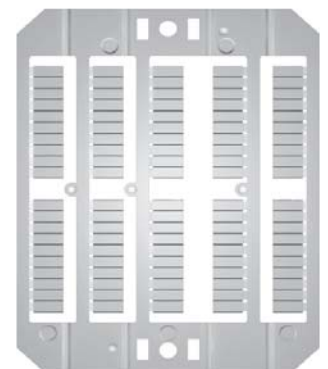

tags SHZ/1

(\*) for availability, please contact our Sales department

# Special marking

Cabur can supply, on request, special marking tags with numbers, letters, symbols and customised logos in packs of 500 tags.

Special marking	
Cat. No.	Description
NU0851SP	CNU/8/51 - special marking
NU0861SP	CNU/8/61 - special marking
NU1051SP	CNU/10/51 - special marking
NU1061SP	CNU/10/61 - special marking
SH004SP	SHZ.1 - special marking

## Request special marking by specifying the following on the order:

- Article cat. no. chosen from those specified on the table (e.g. NU0851SP)
- Quantity of tags needed (min. 500 pcs. / 1 pk.)
- Writing type (horizontal or vertical)
- Content (text, numbers, symbols) to be printed on the tags (e.g. A1B)

To optimise the service, as an alternative or in addition to that required at points c) and d), we recommend sending Cabur a MarKing Pro file created with the specific requirements of the order.

For example, by ordering:




Cat. No.: **NU0851SP**

Quantity: **1000**

Writing type: **horizontal**

Content: **ABC**

**An order will be placed for 2 packs of 500 tabs each of CNU/8/51, customised as requested.**

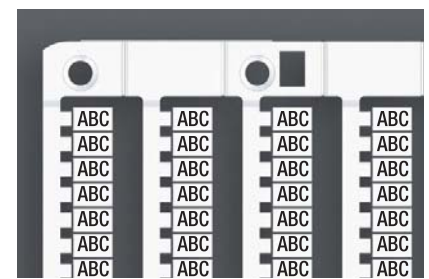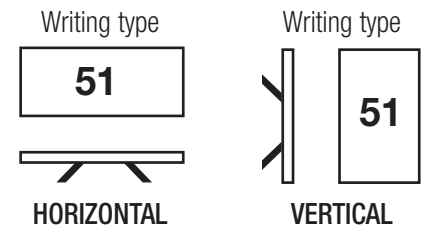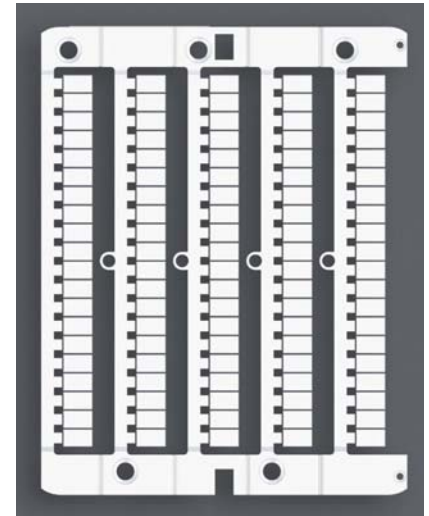

# Cross-reference table of tags for marking terminal blocks

Following an update of the product line, some markings of Cabur terminal blocks have been replaced with new tags.


To ensure maximum compatibility in use, the hook on the Cabur terminal block has not been changed in any way.

That means, **earlier batches of tags, which are no longer produced, and new tags can both be used on our terminal blocks.**

ARTICLES NO LONGER PRODUCED		CORRESPONDING NEW ARTICLES	
Type	Cat. No.	Type	Cat. No.
CNU/8	NU...	CNU/8/51	NU0851
CNU/10	NU10..	-	-
CSC	CS...	-	-
SNZ/5	SN001	CNU/8/51	NU0851
SNZ/8	SN004	CNU/8/51	NU0851
SNZ/10	SN005	CNU/8/51	NU0851
SNZ/60	SN007	CNU/8/51	NU0851
SNZ/65	SN006	CNU/8/51	NU0851
SNZ/508	SN009	CNU/8/51	NU0851
SHZ/4	SH002	CNU/8/61	NU0861
SHZ/6	SH003	CNU/8/51	NU0851
SNZ/8/91	SN491	CNU/8/51	NU0851

# Specific accessories

## Short circuit plates



**SCB/6/PO/2** Cat. No. **SB203**

Short circuit plate for two adjacent SCB.6 terminal blocks



**SCB/6/PO/4** Cat. No. **SB204**

Short circuit plate for four adjacent SCB.6 terminal blocks



**HSCB/6/PO/2** Cat. No. **HB203**

Short circuit plate for two adjacent HSCB.6 terminal blocks



**HSCB/6/PO/4** Cat. No. **HB204**

Short circuit plate for four adjacent HSCB.6 terminal blocks



**SCB/4/PO/2** Cat. No. **SB303**

Short circuit plate for two adjacent SCB.4 terminal blocks



**SCB/4/PO/4** Cat. No. **SB304**

Short circuit plate for four adjacent SCB.4 terminal blocks



**SCX/PO/2** Cat. No. **SC103**

Short circuit plate for two adjacent SCX.10 terminal blocks



**SCX/PO/4** Cat. No. **SC104**

Short circuit plate for four adjacent SCX.10 terminal blocks

Allow the simultaneous earth connection of current transformers already connected to SCB.4, SCB.6 or SCX.10 terminal blocks. They are made up of special plates and sleeves guaranteeing the correct operational sequence. The plates, in the open position, avoid the translation movement of slide-links, preventing the disconnection of current circuits.

## Short circuit screws and sleeves



**SCB/6/CPM** Cat. No. **SB205**

Sleeve to be used with SCB/6/PO link



**HSCB.6/CPM** Cat. No. **HB205**

Sleeve to be used with HSCB/6/PO link



**SCB/4/CPM** Cat. No. **SB305**

Sleeve to be used with SCB/4/PO link



**SCX/CPM** Cat. No. **SC105**

Sleeve to be used with SCX/PO link (\*)

(\*) supplied assembled as in position A. In order to be inserted into the slot of the plate, it must be dismounted as in position B, then reassembled and screwed into the body of the terminal block.

## Internal/external cross-connection devices



**FVS/VCI** Cat. No. **FV107**

Screw and sleeve to perform the internal link between the front and back conducting bodies of FVS.4 terminal block.



**FVS/VCE** Cat. No. **FV108**

Screw and sleeve to perform the internal and external link between the front and back conducting bodies of FVS.4 terminal blocks.

## Conducting elements



**CO/5** Cat. No. **VL103**


Ø 5 x 20 mm - in brass for terminal block types: SFO.4 - SFR.4 - SFR.6/M - FLD.10/F5 - HMF.4 - VLM.10



**SFC/CO** Cat. No. **FC102**


Ø 6,3 x 32 mm - in brass for terminal block types: FPC.10 - SFC.10 - SFR.6 - with the option of inserting an SDD/2 test plug

Terminal blocks suited for Ø 5 x 20 mm or Ø 6 x 32 mm fuses can be used as simple disconnection blocks by inserting special **conducting elements**.



**DAS/VCI** Cat. No. **DS107**

Screw and sleeve to perform the internal link between the front and back conducting bodies of DAS.4 terminal blocks.



**DAS/VCE** Cat. No. **DS108**

Screw and sleeve to perform the internal link between front and back conducting bodies or to externally link the conducting bodies of adjacent terminal blocks, of DAS.4 terminal blocks.

## Screening lug



**CBD/SH** Cat. No. **CB009**

For the connection of the cable shielding - to be used on terminal blocks type CBD.2, 4, 6, 10.

# Screwdrivers and pliers

**Screwdrivers** for the activation of the spring on **H** series terminal blocks



## CCH/2,5-4

Cat. No. **CCH02**

<b>blade</b>	0,5 x 3 x 80 mm
<b>length</b>	160 mm

## CCH/6

Cat. No. **CCH06**

<b>blade</b>	1 x 5,5 x 125 mm
<b>length</b>	220 mm

**Screwdrivers** insulated for voltages up to 1000 V



## CCV/2,5

Cat. No. **CCV03**

<b>blade</b>	0,4 x 2,5 x 75 mm
<b>length</b>	160 mm

## CCV/4

Cat. No. **CCV04**

<b>blade</b>	0,8 x 4 x 100 mm
<b>length</b>	195 mm

## CCV/5

Cat. No. **CCV05**

<b>blade</b>	1 x 5,5 x 125 mm
<b>length</b>	220 mm

The ergonomic shape of the handle guarantees comfort during all types of use. Furthermore, each handle has slip-proof rubber inserts, in light colour, to ensure a good grip on the tool.



## Crimping pliers



This tool has been designed for plant engineering. The parallel movement of the matrices generates a 10000 N force. The entire tool is coated with plastic, which makes it ergonomic and comfortable to use.

Type	Cat. No.	Description
UMCT	UMCT3149	Crimping tool
UMPU02510	UMCT3127	Matrix for ferrules from 0.25 to 10 mm <sup>2</sup>
UMPU1625	UMCT3153	Matrix for ferrules from 16 to 25 mm <sup>2</sup>
UMPU3550	UMCT3154	Matrix for ferrules from 35 to 50 mm <sup>2</sup>
UMPI1525	UMCT3129	Matrix for eyelets and spade lugs from 1,5 to 2,5 mm <sup>2</sup>
UMPI4060	UMCT3128	Matrix for eyelets and spade lugs from 4 to 6 mm <sup>2</sup>

# Ferrules




## WP ferrules with insulated collar

For cable termination, a complete range of single entry bootlace ferrules is available. In electrolytic tinned copper, with polypropylene insulation.

TYPE	CAT. NO.	COLOUR	CROSS-SECTION (mm <sup>2</sup> )	D1 (mm)	D2 (mm)	L1 (mm)	L2 (mm)	S1 (mm)	S2 (mm)	Pcs per package
WP5-14	WP30002	White	0,5	1,0	2,6	14,0	8,0	0,15	0,25	500
WP75-14	WP30005	Grey	0,75	1,2	2,8	14,0	8,0	0,15	0,25	500
WP1-14	WP30009	Red	1,0	1,4	3,0	14,0	8,0	0,15	0,25	500
WP15-14	WP30013	Black	1,5	1,7	3,5	14,0	8,0	0,15	0,25	500
WP25-14	WP30016	Blue	2,5	2,2	4,2	14,0	8,0	0,15	0,25	500
WP40-16	WP30019	Grey	4,0	2,8	4,8	17,0	10,0	0,2	0,3	500
WP60-20	WP30022	Yellow	6,0	3,5	6,3	20,0	12,0	0,2	0,3	100
WP100-21	WP30024	Red	10,0	4,5	7,6	22,0	12,0	0,2	0,4	100
WP160-22	WP30026	Blue	16,0	5,8	8,8	24,0	12,0	0,2	0,4	100
WP250-29	WP30028	Yellow	25,0	7,3	11,2	30,0	16,0	0,2	0,4	50
WP350-30	WP30030	Red	35,0	8,3	12,7	30,0	16,0	0,2	0,4	50
WP500-40	WP30032	Blue	50,0	10,3	15,0	36,0	20,0	0,3	0,5	50

Reference drawing



## WPD ferrules with insulated collar – double entry

Double entry ferrules are made of electrolytic tinned copper and insulation in special polyamide for high temperatures (+ 110 °C).

These ferrules are designed to be used in connections requiring safe and rapid shunting; indeed, current tendencies towards the miniaturisation of electrical circuits provide a valid and economic use for these terminals.

The unique and large entry space comfortably takes the width of two wires.

Reference drawing



Type	Cat. No.	COLOUR	SEZIONE (mm <sup>2</sup> )	DIMENSIONS (mm)								Pcs per package
				D1	D2	D3	L1	L2	S1	S2		
WPD05/15	WP90001	White	2,0 x 0,5	1,5	2,5	4,7	15,7	8,7	0,15	0,3	500	
WPD75/15	WP90002	Grey	2,0 x 0,75	1,8	2,8	5,0	15,5	8,9	0,15	0,3	500	
WPD01/15	WP90003	Red	2,0 x 1,0	2,3	3,2	5,5	15,8	8,0	0,15	0,3	500	
WPD15/16	WP90004	Black	2,0 x 1,5	2,3	3,5	6,5	16,0	8,0	0,15	0,3	500	
WPD25/18	WP90005	Blue	2,0 x 2,5	2,9	4,3	7,5	18,3	10,0	0,20	0,4	500	
WPD04/23	WP90006	Grey	2,0 x 4,0	3,8	4,9	8,8	23,3	12,5	0,20	0,4	100	



## TSA cable bindings

For the rapid wiring of conductors; in self-extinguishing polyamide, available in the following sizes:

- TSA/3** int. Ø = 1,5 mm - ext. Ø = 3,5 mm Cat. No. **TSA03**
- TSA/6** int. Ø = 4 mm - ext. Ø = 6 mm Cat. No. **TSA06**
- TSA/10** int. Ø = 8 mm - ext. Ø = 10 mm Cat. No. **TSA10**
- TSA/12** int. Ø = 9,5 mm - ext. Ø = 12 mm Cat. No. **TSA12**



# Alphabetical index

	TYPE	CAT. NO.	PAGE	TYPE	CAT. NO.	PAGE	TYPE	CAT. NO.	PAGE
<b>A</b>	ACB.120/BB	AC400	20	CB70/PT	CB811	137	CF.12/FW/CPT	CFW90	57
	ACB.185/BB	AC700	20	CB70/PT(EX)I	CBX83	137	CF.12/FW/CPT (EX)I	CFW99	57
	ACB.70/BB	AC100	20	CBC.10	CBC10	4	CF/PTM	CF301	57
	ACI121017	Z121017	139	CBC.10 (EX)I	CBI10	4	CF5	FL404	108
	ACI121019	Z121019	139	CBC.10/GR	CBC10GR	4	CF5L	FL204	109
	ACI121026	Z121026	144	CBC.16	CBC16	4	CF6	FL304	109
	ACI121116	Z121116	141	CBC.16 (EX)I	CBI16	4	CFD	FL504	109
	ACI121118	Z121118	144	CBC.16/GR	CBC16GR	4	CHP.2/GR	HVP900GR	91
	ACI121119	Z121119	144	CBC.16/PT	CB161	137	CHP.2D/GR	HVP910GR	91
	ACI121121	Z121121	144	CBC.16/PT(EX)I	CBI161	137	CHTE.2	HVT900	92
	ACI121123	Z121123	144	CBC.2	CBC02	3	CHTE.2D	HVT910	92
	ACI121211	Z121211	144	CBC.2 (EX)I	CBI02	3	CIL/115	SF515	155
	ACI121212	Z121212	144	CBC.2/GR	CBC02GR	3	CIL/12	SF512	155
	ACI121213	Z121213	143	CBC.2-10/PT	CB061	137	CIL/230	SF523	155
	ACI121214	Z121214	143	CBC.2-10/PT(EX)I	CBI061	137	CIL/24	SF524	155
	ACI121215	Z121215	143	CBC.35	CBC35	4	CIL/48	SF548	155
	ACI121216	Z121216	143	CBC.35 (EX)I	CBI35	4	CNT.16	CNT16	69
	ACI121217	Z121217	143	CBC.35/GR	CBC35GR	4	CNT.35	CNT35	69
	ACI121218	Z121218	143	CBC.35/PT	CB351	137	CNT.6	CNT06	69
	ACI121219	Z121219	143	CBC.35/PT(EX)I	CBI351	137	CNU/10/51	NU1051	163
	ACI121221	Z121221	144	CBC.4	CBC04	3	CNU/10/51	NU1051SP	167
	ACI121228	Z121228	141	CBC.4 (EX)I	CBI04	3	CNU/10/61	NU1061	163
	ACI121301	Z121301	141	CBC.4/GR	CBC04GR	3	CNU/10/61	NU1061SP	167
	ACI121307	Z121307	144	CBC.6	CBC06	3	CNU/5/015	N5015	166
	ACI121311	Z121311	141	CBC.6 (EX)I	CBI06	3	CNU/5/016	N5016	166
	ACI121314	Z121314	141	CBC.6/GR	CBC06GR	3	CNU/5/017	N5017	166
	ACI121316	Z121316	142	CBD.10	CB440	14	CNU/5/018	N5018	166
	ACI121317	Z121317	142	CBD.10 (EX)I	CBX45	14	CNU/5/023	N5023	166
	ACI121318	Z121318	142	CBD.16	CB510	14	CNU/5/024	N5024	166
	ACI121319	Z121319	142	CBD.16 (EX)I	CBX52	14	CNU/5/025	N5025	166
	ACI121410	Z121410	142	CBD.2	CB110	13	CNU/5/026	N5026	166
	ACI121415	Z121415	141	CBD.2 (EX)I	CBX12	13	CNU/5/027	N5027	166
	ACI121421	Z121421	144	CBD.35	CB610	14	CNU/5/029	N5029	166
	ADRKITEK	KITCABUREK	163	CBD.35 (EX)I	CBX62	14	CNU/5/030	NU005	166
	ADRKITGR	KITCABURBG	163	CBD.4	CB240	13	CNU/5/110	N5110	166
	ADRKITMU	KITCABURMU	163	CBD.4 (EX)I	CBX24	13	CNU/5/123	N5123	166
	AFO.2/1+1	AF500	54	CBD.50	CB710	15	CNU/5/250	N5250	166
	AFO.2/2+2	AF400	54	CBD.50 (EX)I	CBX72	15	CNU/5/350	N5350	166
	AFO.2/2+2/TP	AF410	54	CBD.6	CB340	13	CNU/8/000	NU08510	164
	AFO.2/2+2/TPM	AF420	54	CBD.6 (EX)I	CBX34	13	CNU/8/001	NU0855001	164
	AFO/PT	AF201	137	CBD.70	CB810	15	CNU/8/010	NU0851010	164
<b>B</b>	BPL.4	BP100	67	CBD.70 (EX)I	CBX82	15	CNU/8/013	NU0851R	164
	BPL.4/PS	BP300	68	CBD/SH	CB009	168	CNU/8/014	NU0851S	164
	BPL.4/PS/A	BP310	68	CBE.2	CE110	23	CNU/8/015	NU0851T	164
	BPL.4/PS/B	BP320	68	CBR.2	CR110	5	CNU/8/016	NU0851N	164
	BPL/R	BP200	67	CBR.2/GR	CR110GR	5	CNU/8/017	NU0851U	164
	BT/2	BT006	138	CBR/PT	CR111	137	CNU/8/018	NU0851V	164
	BT/3	BT003	138	CCH/2,5-4	CCH02	169	CNU/8/019	NU0851W	164
	BT/DIN/PO	BT001	138	CCH/6	CCH06	169	CNU/8/020	NU0851X	164
	BTO	BT007	138	CCV/2,5	CCV03	169	CNU/8/021	NU0851Y	164
<b>C</b>	CAM	MA110	63	CCV/4	CCV04	169	CNU/8/022	NU0851Z	164
	CAM/B	MA111	63	CCV/5	CCV05	169	CNU/8/023	NU0851111	164
	CAM/C	MA112	63	CDA.120/BB	CD400	118	CNU/8/024	NU085112	164
	CAMUT.12/02	CAMUT02	132	CDA.120/BC	CD500	117	CNU/8/025	NU085110	164
	CAMUT.12/04	CAMUT04	132	CDA.120/CC	CD600	116	CNU/8/027	NU085114	164
	CAMUT.12/06	CAMUT06	132	CDA.185/BB	CD710	118	CNU/8/028	NU0851115	164
	CAMUT.12/10	CAMUT10	132	CDA.185/BC	CD810	117	CNU/8/030	NU0851	164
	CAMUT.12/16	CAMUT16	132	CDA.185/CC	CD910	116	CNU/8/031	NU0851A	164
	CAMUT.12/25	CAMUT25	132	CDA.70/BB	CD100	118	CNU/8/032	NU0851B	164
	CAMUT.12/35	CAMUT35	132	CDA.70/BC	CD200	117	CNU/8/033	NU0851C	164
	CB10/PT	CB431	137	CDA.70/CC	CD300	116	CNU/8/034	NU0851D	164
	CB10/PT(EX)I	CBX44	137	CDA/120/PT	CD401	137	CNU/8/035	NU0851E	164
	CB16/PT	CB511	137	CDA/185/PT	CD701	137	CNU/8/036	NU0851F	164
	CB16/PT(EX)I	CBX53	137	CDA/70/PT	CD101	137	CNU/8/037	NU0851G	164
	CB2/PT	CB111	137	CDA/BT	CD003	138	CNU/8/038	NU0851H	164
	CB2/PT(EX)I	CBX13	137	CF.08/2+2	CF400	58	CNU/8/043	NU0851I	164
	CB35/PT	CB611	137	CF.12/1+1	CF100	57	CNU/8/044	NU0851L	164
	CB35/PT(EX)I	CBX63	137	CF.12/1+1 (EX)I	CFX10	57	CNU/8/045	NU0851M	164
	CB4/6/PT	CB241	137	CF.12/1+1/AG	CFA10	57	CNU/8/046	NU0851O	164
	CB4/6/PT(EX)I	CBX25	137	CF.12/2+2	CF200	58	CNU/8/047	NU0851P	164
	CB50/PT	CB711	137	CF.12/CPT	CF900	57	CNU/8/048	NU0851Q	164
	CB50/PT(EX)I	CBX73	137	CF.12/CPT (EX)I	CFX90	57	CNU/8/049	NU0851J	164

# Alphabetical index

TYPE	CAT. NO.	PAGE	TYPE	CAT. NO.	PAGE	TYPE	CAT. NO.	PAGE
CNU/8/050	NU0851K	164	CONTC/16	CONTC16	130	DAS.4/CI/GR	DS117GR	27
CNU/8/051	NU0851051	164	CONTC/2,5	CONTC02	130	DAS.4/D	DS114	53
CNU/8/101	NU0851101	164	CONTC/2/16	CONTC216	131	DAS.4/D/GR	DS114GR	53
CNU/8/11	NU0851011	165	CONTC/2/25	CONTC225	131	DAS.4/D12	DSD012	51
CNU/8/111	NU08511	164	CONTC/2/35	CONTC235	131	DAS.4/D12/GR	DSD012GR	51
CNU/8/12	NU0851012	165	CONTC/2/6	CONTC206	131	DAS.4/D24	DSD024	51
CNU/8/13	NU0851013	165	CONTC/25	CONTC25	130	DAS.4/D24/GR	DSD024GR	51
CNU/8/14	NU0851014	165	CONTC/3/16	CONTC316	131	DAS.4/D5	DSD005	51
CNU/8/15	NU0851015	165	CONTC/3/25	CONTC325	131	DAS.4/D5/GR	DSD005GR	51
CNU/8/151	NU0851151	164	CONTC/3/6	CONTC306	131	DAS.4/D60	DSD060	51
CNU/8/16	NU0851016	165	CONTC/35	CONTC35	130	DAS.4/D60/GR	DSD060GR	51
CNU/8/17	NU0851017	165	CONTC/4	CONTC04	130	DAS.4/DD	DS120	53
CNU/8/18	NU0851018	165	CONTC/5/16	CONTC516	131	DAS.4/DD/GR	DS120GR	53
CNU/8/19	NU0851019	165	CONTC/5/25	CONTC525	131	DAS.4/E	DS115	53
CNU/8/20	NU0851020	165	CONTC/5/6	CONTC506	131	DAS.4/E/GR	DS115GR	53
CNU/8/201	NU0851201	164	CONTC/6	CONTC06	130	DAS.4/GR	DS100GR	27
CNU/8/222	NU08512	164	CPF/5	CPF05	36	DAS.4/I	DS119	53
CNU/8/251	NU0851251	165	CPF/5	CPF05	87	DAS.4/I/GR	DS119GR	53
CNU/8/2A	NU085102A	164	CPM/01	CPM01	151	DAS.4/L	DS130	53
CNU/8/301	NU0851301	165	CPM/03	CPM03	151	DAS.4/L/GR	DS130GR	53
CNU/8/333	NU08513	165	CPM/05	CPM05	151	DAS.4/SS	DS110	28
CNU/8/351	NU0851351	165	CPM/06	CPM06	151	DAS.4/SS/GR	DS110GR	28
CNU/8/401	NU0851401	165	CPM/07	CPM07	151	DAS.4/T	DS128	53
CNU/8/444	NU08514	165	CPM/08	CPM08	151	DAS.4/T/GR	DS128GR	53
CNU/8/451	NU0851451	165	CPM/11	CPM11	151	DAS.4/U	DS129	53
CNU/8/501	NU0851501	165	CPM/12	CPM12	151	DAS.4/U/GR	DS129GR	53
CNU/8/51	NU0851	163	CPM/13	CPM13	151	DAS.4/V120	DSV120	52
CNU/8/51	NU0851SP	167	CPM/14	CPM14	151	DAS.4/V120/GR	DSV120GR	52
CNU/8/510	NU0851510	165	CPM/16	CPM16	151	DAS.4/V230	DSV230	52
CNU/8/520	NU0851520	165	CPM/17	CPM17	151	DAS.4/V230/GR	DSV230GR	52
CNU/8/530	NU0851530	165	CPM/20	CPM20	151	DAS.4/V24	DSV024	52
CNU/8/540	NU0851540	165	CPM/21	CPM21	151	DAS.4/V24/GR	DSV024GR	52
CNU/8/550	NU0851550	165	CPM/25	CPM25	151	DAS.4/V48	DSV048	52
CNU/8/551	NU0851551	165	CPM/44	CPM44	151	DAS.4/V48/GR	DSV048GR	52
CNU/8/555	NU08515	165	CPM/53	CPM53	151	DAS/PT	DS101	137
CNU/8/560	NU0851560	165	CPM/56	CPM56	151	DAS/PT(EX)I	DS201	137
CNU/8/570	NU0851570	165	CPM/57	CPM57	151	DAS/VCE	DS108	168
CNU/8/580	NU0851580	165	CPM/70	CPM70	151	DAS/VCI	DS107	168
CNU/8/590	NU0851590	165	CPM/83	CPM83	151	DBC.2	DB100	26
CNU/8/600	NU0851600	165	CPM/99	CPM99	151	DBC.2 (EX)I	DB200	26
CNU/8/601	NU0851601	165	CPX/01	CPX01	151	DBC.2/CI	DB117	26
CNU/8/61	NU0861	163	CPX/03	CPX03	151	DBC.2/CI/GR	DB117GR	26
CNU/8/61	NU0861SP	167	CPX/05	CPX05	151	DBC.2/GR	DB100GR	26
CNU/8/651	NU0851651	165	CPX/06	CPX06	151	DBC/PT	DB101	137
CNU/8/666	NU08516	165	CPX/07	CPX07	151	DBC/PT(EX)I	DB201	137
CNU/8/701	NU0851701	165	CPX/08	CPX08	151	DF/VPC	DU02S	60
CNU/8/751	NU0851751	165	CPX/11	CPX11	151	DFH/1/BIANCO	DH01B	156
CNU/8/777	NU08517	165	CPX/12	CPX12	151	DFH/1/ROSSO	DH01R	156
CNU/8/801	NU0851801	165	CPX/13	CPX13	151	DFH/1/VERDE	DH01V	156
CNU/8/851	NU0851851	165	CPX/14	CPX14	151	DFH/2/BIANCO	DH02B	156
CNU/8/888	NU08518	165	CPX/16	CPX16	151	DFH/2/ROSSO	DH02R	156
CNU/8/901	NU0851901	165	CPX/21	CPX21	151	DFH/2/VERDE	DH02V	156
CNU/8/951	NU0851951	165	CPX/44	CPX44	151	DFH/3/BIANCO	DH03B	156
CNU/8/999	NU08519	165	CPX/83	CPX83	151	DFH/3/ROSSO	DH03R	156
CNU/8/L1	NU08510L1	164	CVF.4	CV100	55	DFH/3/VERDE	DH03V	156
CNU/8/L2	NU08510L2	164	CVF.4 (EX)I	CV200	55	DFH/4/BIANCO	DH04B	156
CNU/8/L3	NU08510L3	164	CVF.4/TP	CV140	56	DFH/4/ROSSO	DH04R	156
CNU/8/NI	NU08510NI	164	CVF.4/VS	CV110	56	DFH/4/VERDE	DH04V	156
CNU/8/PE	NU08510PE	164	CVF.4/VS2	CV130	56	DFM/300	DF300	157
CNU/8/R1	NU08510R1	164	CVF.4/WW	CV120	56	DFM/400	DF400	157
CNU/8/S1	NU08510S1	164	CVF/PT	CV101	137	DFM/500	DF500	157
CNU/8/S2	NU08510S2	164	CVF/PT(EX)I	CV201	137	DFM/600	DF600	157
CNU/8/S3	NU08510S3	164	DAS.4	DS100	27	DFM/700	DF700	157
CNU/8/U1	NU08510U1	164	DAS.4 (EX)I	DS200	27	DFM/800	DF800	157
CNU/8/U2	NU08510U2	164	DAS.4/A	DS111	53	DFM/900	DF900	157
CNU/8/V1	NU08510V1	164	DAS.4/A/GR	DS111GR	53	DFP/2/BIANCO	DFP2B	156
CNU/8/V2	NU08510V2	164	DAS.4/B	DS112	53	DFP/2/ROSSO	DFP2R	156
CNU/8/W1	NU08510W1	164	DAS.4/B/GR	DS112GR	53	DFP/2/VERDE	DFP2V	156
CNU/8/W2	NU08510W2	164	DAS.4/C	DS113	53	DFS.4/PT/GR	DS401GR	137
CO/5	VL103	168	DAS.4/C/GR	DS113GR	53	DFU/1/BIANCO	DU01B	156
CONTC/1,5	CONTC01	130	DAS.4/CI	DS117	27	DFU/1/ROSSO	DU01R	156
CONTC/10	CONTC10	130	DAS.4/CI (EX)I	DS217	27	DFU/1/VERDE	DU01V	156

# Alphabetical index

TYPE	CAT. NO.	PAGE	TYPE	CAT. NO.	PAGE	TYPE	CAT. NO.	PAGE
DFU/2/BIANCO	DU02B	156	F5/6,3 A	FN013ST	155	HMD.1/PT(EX)I	HD301	137
DFU/2/ROSSO	DU02R	156	F5/630 MA	FN005ST	155	HMD.1/PT/GR	HD201GR	137
DFU/2/VERDE	DU02V	156	F5/8 A	FN014ST	155	HMD.1/X/GR	HD130GR	83
DFU/3/BIANCO	DU03B	156	FDP.2	FD100	55	HMD.2/GR	HD100GR	82
DFU/3/ROSSO	DU03R	156	FDP.2/GR	FD100GR	55	HMD.2N (EX)I	HD410	82
DFU/3/VERDE	DU03V	156	FDP/PT	FD101	137	HMD.2N/3DC/GR	HD430GR	83
DFU/4/BIANCO	DU04B	156	FFS.4	FF100	29	HMD.2N/CI/GR	HD450GR	82
DFU/4/ROSSO	DU04R	156	FFS.4/GR	FF100GR	29	HMD.2N/DD/GR	HD420GR	83
DFU/4/VERDE	DU04V	156	FFS/PT	FF101	137	HMD.2N/GR	HD400GR	82
DFU/5/BIANCO	DU05B	156	FLD.10/D	FL500	109	HMD.2N/X/GR	HD440GR	83
DFU/5/ROSSO	DU05R	156	FLD.10/F5	FL400	108	HMD.2N/X1/GR	HD441GR	84
DFU/5/VERDE	DU05V	156	FLD.10/F5L	FL200	109	HMD/PT/GR	HD101GR	137
DFU/6/BIANCO	DU06B	156	FLD.10/F6	FL300	109	HMF.4/GR	HF110GR	88
DFU/6/ROSSO	DU06R	156	FLD/PT	FL101	137	HMF.4/L12/GR	HF212GR	88
DFU/6/VERDE	DU06V	156	FPC.10	FP100	37	HMF.4/L24/GR	HF224GR	88
DFU/7/BIANCO	DU07B	156	FPC.10	FP100	44	HMF.4/L48/GR	HF248GR	88
DFU/7/ROSSO	DU07R	156	FPL.10/C	FP300	37	HMF/PT/GR	HF111GR	137
DFU/7/VERDE	DU07V	156	FPL.10/C115	FP915	39	HMFA.2/GR	HF300GR	87
DSF.4/GR	DA200GR	34	FPL.10/C12	FP912	39	HMM.1 (EX)I	HI400	72
DSFA.4	DA100	35	FPL.10/C230	FP923	39	HMM.1/1+2 (EX)I	HI410	72
DSFA.4/GR	DA100GR	35	FPL.10/C24	FP924	39	HMM.1/1+2/GR	HM410GR	72
DSFA.4/L12	DA112	35	FPL.10/C48	FP948	39	HMM.1/2+2 (EX)I	HI420	72
DSFA.4/L24	DA124	35	FPL.10/L	FP200	37	HMM.1/2+2/GR	HM420GR	72
DSS.4	DS400	28	FVS.4	FV100	29	HMM.1/GR	HM400GR	72
DSS.4	DS400	41	FVS.4/GR	FV100GR	29	HMM.10 (EX)I	HI330	76
DSS.4/GR	DS400GR	28	FVS/PT	FV101	137	HMM.10/GR	HM330GR	76
DSS.4/GR	DS400GR	41	FVS/VCE	FV108	168	HMM.16 (EX)I	HI340	76
DSS/PT	DS301	137	FVS/VCI	FV107	168	HMM.16/GR	HM340GR	76
EDM.10	ED400	100	GPA.150	GA200	7	HMM.2 (EX)I	HI500	73
EDM.10 (EX)I	EI400	100	GPA.150/FIX	GF200	7	HMM.2/1+2 (EX)I	HI510	73
EDM.16	ED500	100	GPA.150/GR	GA200GR	7	HMM.2/1+2/GR	HM510GR	73
EDM.16 (EX)I	EI500	100	GPA.240	GA300	7	HMM.2/1+2/S/GR	HMS20GR	74
EDM.2	ED110	99	GPA.240/FIX	GF300	7	HMM.2/2+2 (EX)I	HI520	73
EDM.2 (EX)I	EI110	99	GPA.240/GR	GA300GR	7	HMM.2/2+2/A/GR	HM170GR	74
EDM.25	ED600	100	GPA.70	GA400	6	HMM.2/2+2/GR	HM520GR	73
EDM.25 (EX)I	EI600	100	GPA.70/FIX	GF400	6	HMM.2/2+2/S/GR	HMS10GR	74
EDM.35	ED700	101	GPA.70/GR	GA400GR	6	HMM.2/GR	HM500GR	73
EDM.35 (EX)I	EI700	101	GPA.95	GA100	6	HMM.4 (EX)I	HI250	75
EDM.4	ED210	99	GPA.95/FIX	GF100	6	HMM.4/1+2 (EX)I	HI210	75
EDM.4 (EX)I	EI210	99	GPA.95/GR	GA100GR	6	HMM.4/1+2/GR	HM210GR	75
EDM.6	ED310	99	GPM.150/BB	GP400	17	HMM.4/2+2 (EX)I	HI220	75
EDM.6 (EX)I	EI310	99	GPM.150/BB/FIX	GP410	17	HMM.4/2+2/GR	HM220GR	75
EDM.70	ED820	101	GPM.150/BC	GP500	18	HMM.4/GR	HM250GR	75
EDM.70 (EX)I	EI810	101	GPM.150/BC/FIX	GP510	18	HMM.6 (EX)I	HI310	76
EDM.70/BC	ED860	101	GPM.150/CC	GP600	19	HMM.6/GR	HM310GR	76
EDM.16/PT	ED501	137	GPM.150/CC/FIX	GP610	19	HMR.16/D/GR	HM360GR	77
EDM.16/PT(EX)I	EI501	137	GPM.240/BB	GP700	17	HMR.16/GR	HM350GR	77
EDM.2/PT	ED111	137	GPM.240/BB/FIX	GP710	17	HMS.2/GR	HS200GR	86
EDM.2/PT(EX)I	EI111	137	GPM.240/BC	GP800	18	HMT.1/1+2/PT	HM411GR	137
EDM.25/PT	ED601	137	GPM.240/BC/FIX	GP810	18	HMT.1/1+2/PT(EX)I	HI411	137
EDM.25/PT(EX)I	EI601	137	GPM.240/CC	GP900	19	HMT.1/2+2/PT	HM421GR	137
EDM.35/PT	ED701	137	GPM.240/CC/FIX	GP910	19	HMT.1/2+2/PT(EX)I	HI421	137
EDM.35/PT(EX)I	EI701	137	GPM.95/BB	GP100	17	HMT.1/PT	HM401GR	137
EDM.4-10/PT	ED401	137	GPM.95/BB/FIX	GP110	17	HMT.1/PT(EX)I	HI401	137
EDM.4-10/PT(EX)I	EI401	137	GPM.95/BC	GP200	18	HMT.1/PT/GR	HM401GR	137
EDM.70/PT	ED801	137	GPM.95/BC/FIX	GP210	18	HMT.2/1+2/PT	HM511GR	137
EDM.70/PT(EX)I	EI801	137	GPM.95/CC	GP300	19	HMT.2/1+2/PT(EX)I	HI511	137
EDM.2/PT	ED111	137	GPM.95/CC/FIX	GP310	19	HMT.2/1+2/PT/GR	HM511GR	137
EDM.2/PT(EX)I	EI101	137	HCD.1 (EX)I	HC210	90	HMT.2/1+2/PT/GR	HM521GR	137
F5/1 A	FN006ST	155	HCD.1/GR	HC200GR	90	HMT.2/2+2/PT	HM521GR	137
F5/1,6 A	FN007ST	155	HCD.1/PT/GR	HC201GR	137	HMT.2/2+2/PT(EX)I	HI521	137
F5/10 A	FN015ST	155	HDE.2/GR	HL500GR	85	HMT.2/2+2/PT/GR	HM511GR	137
F5/100 MA	FN001ST	155	HFR.4/GR	HF210GR	89	HMT.2/2+2/PT/GR	HM521GR	137
F5/12 A	FN016ST	155	HFR.4/M/GR	HF310GR	89	HMT.2/PT	HM501GR	137
F5/2 A	FN008ST	155	HFR.4/PT/GR	HF211GR	137	HMT.2/PT(EX)I	HI501	137
F5/2,5 A	FN009ST	155	HLD.2 (EX)I	HD510GR	85	HMT.2/PT/GR	HM501GR	137
F5/200 MA	FN002ST	155	HLD.2/CI/GR	HL210GR	85	HMT.4/PT	HM251GR	137
F5/3,15 A	FN010ST	155	HLD.2/GR	HL200GR	85	HMT.4/PT(EX)I	HI251	137
F5/315 MA	FN003ST	155	HLD.2/PT/GR	HL201GR	137	HMT.4/PT/GR	HM251GR	137
F5/4 A	FN011ST	155	HMD.1 (EX)I	HD300	82	HMT.6/PT	HM321GR	137
F5/5 A	FN012ST	155	HMD.1/CI/GR	HD120GR	82	HMT.6/PT(EX)I	HI321	137
F5/500 MA	FN004ST	155	HMD.1/GR	HD200GR	82	HMT.6/PT/GR	HM321GR	137

# Alphabetical index

TYPE	CAT. NO.	PAGE	TYPE	CAT. NO.	PAGE	TYPE	CAT. NO.	PAGE
HP.2 (EX)I	HI130	93	MPFA.4	MF100	35	PM/60/3	PM603	145
HP.2/GR	HP150GR	93	MPFA.4/GR	MF100GR	35	PM/60/5	PM605	145
HP/PT(EX)I	HP201	137	MPFA.4/L12	MF112	35	PM/90/10	PM900	145
HP/PT/GR	HV101GR	137	MPFA.4/L24	MF124	35	PM/90/2	PM902	145
HPC.2 (EX)I	HI131	94	MPS.2/PT	MP121	137	PM/90/3	PM903	145
HPC.2/GR	HP160GR	94	MPS.2/PT(EX)I	MP131	137	PM/90/5	PM905	145
HPP.2 (EX)I	HI132	93	MPS.2/SV	MP220	40	PM/91/10	PM910	145
HPP.2/GR	HP170GR	93	MPS.2/SW	MP120	40	PM/91/2	PM912	145
HPV/PT/GR	HV111GR	137	MPS.2/SW (EX)I	MP130	40	PM/91/3	PM913	145
HSCB.4/GR	HB100GR	86	MPS.2/SW/GR	MP120GR	40	PM/91/5	PM915	145
HSCB.4/PT/GR	HB101GR	137	MPS.2/SWP	MP710	40	PMP/01	PMP01	151
HSCB.6/CPM	HB205	168	MPS.2/SWP/GR	MP710GR	40	PMP/02	PMP02	151
HSCB.6/GR	HB200GR	86	MPS.4	MP950	41	PMP/04	PMP04	151
HSCB.6/PT/GR	HB201GR	137	MPS.4/GR	MP950GR	41	PMP/05	PMP05	151
HSCB.6/PO/2	HB203	168	MPS.4/PT	MP901	137	PMP/06	PMP06	151
HSCB.6/PO/4	HB204	168	MPS.4/PT(EX)I	MP902	137	PMP/07	PMP07	151
HTE.1	HT400	78	MPS.4/SW (EX)I	MP960	41	PMP/08	PMP08	151
HTE.1/1+2	HT410	78	MPS.4/VS	MP930	41	PMP/12	PMP12	151
HTE.1/2+2	HT420	78	MS/8X10/N	MZ300N	125	PMP/13	PMP13	151
HTE.10	HT330	81	MS/8X10/T	MZ300T	125	PMP/14	PMP14	151
HTE.16	HT340	81	MSM	FC103	159	PMP/16	PMP16	151
HTE.2	HT500	79	NCS	NC100	96	PMP/17	PMP17	151
HTE.2/1+2	HT510	79	NCS/PT	NC101	137	PMP/20	PMP20	151
HTE.2/2+2	HT520	79	NCV	NC200	96	PMP/25	PMP25	151
HTE.4	HT250	80	PADCABUR	PADCABUR	163	PMP/42	PMP42	151
HTE.4/1+2	HT260	80	PADGRAPH	PADGRAPH	163	PMP/54	PMP54	151
HTE.4/2+2	HT270	80	PADMUTHO	PADMUTHO	163	PMP/55	PMP55	151
HTE.6	HT310	81	PDF.2	PF100	55	PMP/56	PMP56	151
HTTE.2	HLT500	85	PDF/PT	PF101	137	PMP/58	PMP58	151
HVPC.2/GR	HVP300GR	91	PEN025CAB	PEN025CAB	163	POF/05	POF05	150
HVTE.2	HVT500	92	PEN035CAB	PEN035CAB	163	POF/06	POF06	150
I			PEN035GRA	PEN035GRA	163	POF/07	POF07	150
INKBOTT1	INKBOTT1	163	PH/2,5-4	PH100	145	POF/08	POF08	150
K			PH/2,5-4	PH100	149	POF/11	POF11	150
KITPULIZIA	KITPULIZIA	163	PHD/2	PHD02	149	POF/12	POF12	150
L			PHM/2,5/4	PHM01	149	POF/13	POF13	150
LSH/115	LS004	155	PM/10/10	PM100	145	POF/14	POF14	150
LSH/12	LS001	155	PM/10/2	PM102	145	POF/150/2	PO152	150
LSH/230	LS005	155	PM/10/3	PM103	145	POF/150/3	PO153	150
LSH/24	LS002	155	PM/10/5	PM105	145	POF/17	POF17	150
LSH/48	LS003	155	PM/11/10	PM110	145	POF/20	POF20	150
M			PM/11/2	PM112	145	POF/240/2	PO242	150
MAC.6	MA100	62	PM/11/3	PM113	145	POF/240/3	PO243	150
MAC.6/FS	MA410	62	PM/11/5	PM115	145	POF/44	POF44	150
MAC.6/N	MA200	62	PM/12/10	PM120	145	POF/53	POF53	150
MAC.6/VS	MA500	62	PM/12/2	PM122	145	POF/54	POF54	150
MAC/COS	MA030	63	PM/12/3	PM123	145	POF/55	POF55	150
MAC/CP8	MA040	63	PM/12/5	PM125	145	POF/56	POF56	150
MAC/PLZ	MA010	63	PM/20/10	PM210	145	POF/57	POF57	150
MBL.120/10	MB300	22	PM/20/2	PM202	145	POF/70	POF70	150
MBL.150/12	MB400	22	PM/20/3	PM203	145	POF/95/2	PO952	150
MBL.50/6	MB100	21	PM/20/5	PM205	145	POF/95/3	PO953	150
MBL.95/8	MB200	21	PM/25/10	PM250	145	POF/99	POF99	150
MCM.1/B	MC201B	120	PM/25/2	PM252	145	POLM.11/TRA	QPOL1105	127
MCM.1/G	MC201G	120	PM/25/3	PM253	145	POLM.1215	QPOL1203	127
MCM.1/R	MC201R	120	PM/25/5	PM255	145	POLM.1215/BLU	QPOL1205	127
MCM.2/B	MC202B	121	PM/30/10	PM310	145	POLM.1215/TE	QPOL1204	127
MCM.2/G	MC202G	121	PM/30/3	PM303	145	POLM.15/TRA	QPOL1505	127
MCM.2/R	MC202R	121	PM/30/5	PM305	145	POLM.2/100/N	QPOL2100N	129
MCM.3/B	MC203B	121	PM/40/10	PM400	145	POLM.2/125/N	QPOL2125N	129
MCM.3/G	MC203G	121	PM/40/2	PM402	145	POLM.2/126/N	QPOL2126N	129
MCM.3/R	MC203R	121	PM/40/3	PM403	145	POLM.4/160/S	QPOL4160S	129
MCM.3/VE/B	MC233B	122	PM/40/5	PM405	145	POLM.4/161/N	QPOL4161N	129
MCM.3/VE/G	MC233G	122	PM/41/10	PM410	145	POLM.7/TRA	QPOL7005	127
MCM.3/VE/R	MC233R	122	PM/41/2	PM412	145	POMPASP	POMPASP	163
MCT.1/SA/B	MC401B	123	PM/41/3	PM413	145	POS/07	POS07	152
MCT.1/SA/G	MC401G	123	PM/41/5	PM415	145	POS/08	POS08	152
MCT.1/SA/R	MC401R	123	PM/51/10	PM510	145	POS/11	POS11	152
MCT.2/SA/B	MC402B	123	PM/51/3	PM513	145	POS/12	POS12	152
MCT.2/SA/G	MC402G	123	PM/51/5	PM515	145	POS/13	POS13	152
MCT.2/SA/R	MC402R	123	PM/60/10	PM610	145	POS/14	POS14	152
MCT.3/SA/B	MC403B	124	PM/60/2	PM602	145	POS/41	POS41	152
MCT.3/SA/G	MC403G	124						
MCT.3/SA/R	MC403R	124						

# Alphabetical index

TYPE	CAT. NO.	PAGE
POS/42	POS42	152
POS/43	POS43	152
POS/44	POS44	152
POS/53	POS53	152
POS/66	POS66	152
POS/72	POS72	152
POS/91	POS91	152
POS/93	POS93	152
PR/2/AC	PR009	140
PR/2/AC/ZB	PR909	140
PR/2/AS	PR010	140
PR/2/AS/ZB	PR910	140
PR/3/AC	PR003	139
PR/3/AC/ZB	PR903	139
PR/3/AS	PR005	139
PR/3/AS/ZB	PR905	139
PR/3/PA	PR006	139
PR/3/PA/ZB	PR906	139
PR/3/PP	PR007	139
PR/3/PP/ZB	PR907	139
PR/DIN/AC	PR001	140
PR/DIN/AC/ZB	PR901	140
PR/DIN/AL	PR002	140
PR/DIN/AS	PR004	140
PR/DIN/AS/ZB	PR904	140
PRP/5	PRP05	158
PRP/6	PRP06	158
PRP/7	PRP07	158
PRP/7/G	PRP070G	159
PRP/8	PRP08	158
PRT/G	PRT03	157
PRT/M	PRT02	157
PRT/P	PRT01	157
PSD/A	PD001	154
PSD/B	PD002	154
PSD/C	PD003	154
PSD/D	PD004	154
PSD/E	PD005	154
PSD/J	PD014	154
PSD/K	PD011	154
PSD/L	PD009	154
PSD/N	PD013	154
PSD/O	PD017	154
PSD/P	PD015	154
PSD/P	PD15	154
PTC/1/00	PTC0100	146
PTC/1/02	PTC0102	146
PTC/1/03	PTC0103	146
PTC/1/05	PTC0105	146
PTC/1/10	PTC0110	146
PTC/10/00	PTC1000	146
PTC/10/02	PTC1002	146
PTC/10/03	PTC1003	146
PTC/10/05	PTC1005	146
PTC/10/10	PTC1010	146
PTC/11/00	PTC1100	146
PTC/11/02	PTC1102	146
PTC/11/03	PTC1103	146
PTC/11/05	PTC1105	146
PTC/11/10	PTC1110	146
PTC/16/00	PTC1600	146
PTC/16/02	PTC1602	146
PTC/16/03	PTC1603	146
PTC/16/05	PTC1605	146
PTC/16/10	PTC1610	146
PTC/2/00	PTC0200	146
PTC/2/02	PTC0202	146
PTC/2/02	PTC0202	149
PTC/2/03	PTC0203	146
PTC/2/03	PTC0203	149
PTC/2/05	PTC0205	146
PTC/2/05	PTC0205	149

TYPE	CAT. NO.	PAGE
PTC/2/10	PTC0210	146
PTC/20/00	PTC2000	146
PTC/20/02	PTC2002	146
PTC/20/03	PTC2003	146
PTC/20/05	PTC2005	146
PTC/20/10	PTC2010	146
PTC/3/00	PTC0300	146
PTC/3/02	PTC0302	146
PTC/3/03	PTC0303	146
PTC/3/05	PTC0305	146
PTC/3/10	PTC0310	146
PTC/4/00	PTC0400	146
PTC/4/02	PTC0402	146
PTC/4/03	PTC0403	146
PTC/4/05	PTC0405	146
PTC/4/10	PTC0410	146
PTC/5/00	PTC0500	146
PTC/5/02	PTC0502	146
PTC/5/03	PTC0503	146
PTC/5/05	PTC0505	146
PTC/5/10	PTC0510	146
PTC/6/00	PTC0600	146
PTC/6/02	PTC0602	146
PTC/6/03	PTC0603	146
PTC/6/05	PTC0605	146
PTC/6/10	PTC0610	146
PTC/8/00	PTC0800	146
PTC/8/02	PTC0802	146
PTC/8/03	PTC0803	146
PTC/8/05	PTC0805	146
PTC/8/10	PTC0810	146
PZD.4/SO	PZ331	158
PZD.6/SO	PZ112	158
PZM.4	PZ330	158
PZM.6	PZ110	158
<b>Q</b>		
QBLOK.12/BLU	QBLOK1201	126
QBLOK.12/TE	QBLOK1202	126
QBLOK.7/BLU	QBLOK7001	126
QBLOK.7/TE	QBLOK7002	126
QBLOK4P100A7	QBLOK4100	128
QBLOK4P125A11	QBLOK4125	128
QBLOK4P125A15	QBLOK4126	128
<b>R</b>		
RFI.2/GR	RF110GR	65
RFN/PT(EX)I	RF201	137
RFN/PT/GR	RF101GR	137
RN.1 (EX)I	RN400	64
RN.1/GR	RN300GR	64
RN.2 (EX)I	RN510	64
RN.2/GR	RN500GR	64
RP.4 (EX)I	RP400	64
RP.4/GR	RP300GR	64
RP.4/PT(EX)I	RP401	137
RP.4/PT/GR	RP301GR	137
<b>S</b>		
SCB.10	SB400	47
SCB.10/CD	SB420	47
SCB.10/CD/GR	SB420GR	47
SCB.10/DD	SB410	47
SCB.10/DD/GR	SB410GR	47
SCB.10/GR	SB400GR	47
SCB.4	SB300	44
SCB.4/GR	SB300GR	44
SCB.6	SB200	46
SCB.6/CD	SB220	46
SCB.6/CD/GR	SB220GR	46
SCB.6/DD	SB210	46
SCB.6/DD/GR	SB210GR	46
SCB.6/GR	SB200GR	46
SCB/10/PT	SB401	137
SCB/4/CPM	SB305	168
SCB/4/PO/2	SB303	168
SCB/4/PO/4	SB304	168
SCB/4/PT	SB301	137

TYPE	CAT. NO.	PAGE
SCB/6/CPM	SB205	168
SCB/6/PO/2	SB203	168
SCB/6/PO/4	SB204	168
SCB/6/PT	SB201	137
SCX.10	SC100	106
SCX.10/DD	SC110	106
SCX.10/O	SC400	106
SCX.10/O/PI	SC500	107
SCX.10/O-CD	SC220	107
SCX.10/O-DD	SC210	106
SCX.10/PI/CD	SC230	107
SCX.10/PI/DD	SC240	107
SCX.10-CD	SC120	107
SCX.10-PI	SC200	107
SCX/CPM	SC105	168
SCX/PO/2	SC103	168
SCX/PO/4	SC104	168
SCX/PT	SC101	137
SD5/PT	DD501	153
SD6/PT	DD601	153
SDC/5	DC005	153
SDC/5P	DC05P	153
SDC/5V	DC05V	153
SDC/6	DC006	153
SDC/6P	DC06P	153
SDC/6V	DC06V	153
SDC/POL	DCPOL	153
SDD/1	DD001	154
SDD/2	DD002	154
SDD/2	DD02	154
SDD/5	DD005	153
SDD/6	DD006	153
SDH/4	DH004	153
SDH/4P	DH04P	153
SDH/5	DH005	153
SDH/6	DH006	153
SDH/7	DH007	153
SDH/7P	DH07P	153
SDN/D	SD200	124
SDN/H	SD300	124
SFC.10	FC100	108
SFC/CO	FC102	168
SFC/PT	FC101	137
SFL.10	FC200	108
SFO.4	SF400	32
SFO.4	SF400	43
SFO.4 (EX)I	SF600	32
SFO.4 (EX)I	SF600	43
SFO.4/C115	SF815	39
SFO.4/C12	SF812	39
SFO.4/C230	SF823	39
SFO.4/C24	SF824	39
SFO.4/C48	SF848	39
SFO.4/VS	SF410	33
SFO.4/VS	SF410	43
SFO/PT	SF401	137
SFO/PT(EX)I	SF601	137
SFR.4	SF900	32
SFR.4	SF900	42
SFR.4	SF900	48
SFR.4 (EX)I	SF850	32
SFR.4 (EX)I	SF850	42
SFR.4/C115	SF915	38
SFR.4/C12	SF912	38
SFR.4/C230	SF923	38
SFR.4/C24	SF924	38
SFR.4/C48	SF948	38
SFR.4/D1A	SF901	49
SFR.4/D3A	SF903	49
SFR.4/GR	SF900GR	32
SFR.4/GR	SF900GR	42
SFR.4/GR	SF900GR	48

# Alphabetical index

TYPE	CAT. NO.	PAGE
SFR.4/VS	SF910	33
SFR.4/VS	SF910	42
SFR.4/VS/GR	SF910GR	33
SFR.6	SR300	33
SFR.6	SR300	44
SFR.6 (EX)I	SR400	33
SFR.6 (EX)I	SR400	44
SFR.6/GR	SR300GR	33
SFR.6/GR	SR300GR	44
SFR.6/M	SR500	32
SFR.6/M	SR500	43
SFR.6/M (EX)I	SR600	32
SFR.6/M (EX)I	SR600	43
SFR.6/M/GR	SR500GR	32
SFR.6/M/GR	SR500GR	43
SFR.6/PT	SR301	137
SFR.6/PT(EX)I	SR401	137
SFR/PT	SF701	137
SFR/PT(EX)I	SF801	137
SH4/PT	DH401	153
SH5/PT	DH501	153
SH6/PT	DH601	153
SH7/PT	DH701	153
SHZ.1	SH004	163
SHZ.1	SH004SP	167
SHZ/1/00	SH004	166
SHZ/1/19	SH419	166
SHZ/1/AA	SH4AA	166
SHZ/1/BB	SH4BB	166
SHZ/1/CC	SH4CC	166
SHZ/1/DD	SH4DD	166
SHZ/1/EE	SH4EE	166
SHZ/1/FF	SH4FF	166
SHZ/1/G1	SH4G1	166
SHZ/1/G2	SH4G2	166
SHZ/1/G3	SH4G3	166
SHZ/1/G4	SH4G4	166
SHZ/1/G5	SH4G5	166
SHZ/1/G6	SH4G6	166
SHZ/1/G7	SH4G7	166
SHZ/1/G8	SH4G8	166
SHZ/1/G9	SH4G9	166
SHZ/1/GG	SH4GG	166
SHZ/1/HH	SH4HH	166
SHZ/1/II	SH4II	166
SHZ/1/JJ	SH4JJ	166
SHZ/1/KK	SH4KK	166
SHZ/1/LL	SH4LL	166
SHZ/1/MM	SH4MM	166
SHZ/1/NN	SH4NN	166
SHZ/1/OO	SH4OO	166
SHZ/1/PP	SH4PP	166
SHZ/1/QQ	SH4QQ	166
SHZ/1/RR	SH4RR	166
SHZ/1/SS	SH4SS	166
SHZ/1/TT	SH4TT	166
SHZ/1/UU	SH4UU	166
SHZ/1/VV	SH4VV	166
SHZ/1/WW	SH4WW	166
SHZ/1/XX	SH4XX	166
SHZ/1/YY	SH4YY	166
SHZ/1/ZZ	SH4ZZ	166
SHZ/2/00	SH001	166
SHZ/2/19	SH119	166
SHZ/2/AA	SH1AA	166
SHZ/2/BB	SH1BB	166
SHZ/2/CC	SH1CC	166
SHZ/2/DD	SH1DD	166
SHZ/2/EE	SH1EE	166
SHZ/2/FF	SH1FF	166
SHZ/2/G1	SH1G1	166
SHZ/2/G2	SH1G2	166

TYPE	CAT. NO.	PAGE
SHZ/2/G3	SH1G3	166
SHZ/2/G4	SH1G4	166
SHZ/2/G5	SH1G5	166
SHZ/2/G6	SH1G6	166
SHZ/2/G7	SH1G7	166
SHZ/2/G8	SH1G8	166
SHZ/2/G9	SH1G9	166
SHZ/2/GG	SH1GG	166
SHZ/2/HH	SH1HH	166
SHZ/2/II	SH1II	166
SHZ/2/JJ	SH1JJ	166
SHZ/2/KK	SH1KK	166
SHZ/2/LL	SH1LL	166
SHZ/2/MM	SH1MM	166
SHZ/2/NN	SH1NN	166
SHZ/2/OO	SH1OO	166
SHZ/2/PP	SH1PP	166
SHZ/2/QQ	SH1QQ	166
SHZ/2/RR	SH1RR	166
SHZ/2/SS	SH1SS	166
SHZ/2/TT	SH1TT	166
SHZ/2/UU	SH1UU	166
SHZ/2/VV	SH1VV	166
SHZ/2/WW	SH1WW	166
SHZ/2/XX	SH1XX	166
SHZ/2/YY	SH1YY	166
SHZ/2/ZZ	SH1ZZ	166
SUPP/5400	CSBR5400	133
SV.10	SV400	104
SV.10 (EX)I	SI400	104
SV.2	SV100	103
SV.2 (EX)I	SI100	103
SV.4	SV200	103
SV.4 (EX)I	SI200	103
SV.6	SV300	104
SV.6 (EX)I	SI300	104
SV/10/PT	SV401	137
SV/10/PT(EX)I	SI401	137
SV/2/PT	SV101	137
SV/2/PT(EX)I	SI101	137
SV/4/PT	SV201	137
SV/4/PT(EX)I	SI201	137
SV/6/PT	SV301	137
SV/6/PT(EX)I	SI301	137
SWMP2.0	SWMP2	162
SWSR1.0	SWSR1	160
TAI/12	TA002	159
TAI/6	TA001	159
TC/DIN	TC110	112
TC/DIN (EX)I	TC210	112
TC/PO	TC500	59
TC/PO (EX)I	TC510	59
TDE.2	TL500	31
TDE.2/GR	TL500GR	31
TE.10/D	TE500	24
TE.10/O	TO500	24
TE.16/D	TE210	25
TE.16/O	TO210	25
TE.50/D	TE310	25
TE.50/O	TO310	25
TE.6/D	TE110	24
TE.6/O	TO110	24
TEC.10/D	TE510	8
TEC.10/O	TO510	8
TEC.16/D	TE220	8
TEC.16/O	TO220	8
TEC.35/D	TE320	9
TEC.35/O	TO320	9
TEC.6/D	TE120	8
TEC.6/O	TO120	8
TEC.70/D	TE820	9
TEC.70/O	TO810	9

TYPE	CAT. NO.	PAGE
TED.4	TE400	24
TEO.2	TO910	23
TEO.2/PT	TO901	137
TEO.4	TO430	23
TEO.4/PT	TO431	137
TLD.2	TL200	31
TLD.2 (EX)I	TL300	31
TLD.2/GR	TL200GR	31
TLD/PT	TL201	137
TLD/PT(EX)I	TL301	137
TLE.2	TL400	31
TLE.2/GR	TL400GR	31
TLS.2	TL100	30
TLS.2/GR	TL100GR	30
TLS.2/T	TL120	30
TLS.2/U	TL110	30
TLS/PT	TL101	137
TPL.4	TP100	67
TPL.4/PS	TP200	68
TPL.4/PS/A	TP210	68
TPL.4/PS/B	TP220	68
TQM/02	TQM02	159
TQM/04	TQM04	159
TQM/12	TQM12	159
TQM/13	TQM13	159
TQM/14	TQM14	159
TQM/15	TQM15	159
TR.2	TR110	65
TR.2/PT	TR111	137
TR.4	TR200	65
TSA/10	TSA10	170
TSA/12	TSA12	170
TSA/3	TSA03	170
TSA/6	TSA06	170
TTM/12	TTM12	159
TTN.35	TT300	25
TUM/05	TUM05	159
TUM/06	TUM06	159
TUM/07	TUM07	159
TUM/08	TUM08	159
TUM/16	TUM16	159
UMCT	UMCT3149	169
UMPI1525	UMCT3129	169
UMPI4060	UMCT3128	169
UMPU02510	UMCT3127	169
UMPU1625	UMCT3153	169
UMPU3550	UMCT3154	169
VL.16	VL300	110
VL.16/O	VL500	111
VL.16/O-M	VL520	111
VL.16/O-R	VL510	111
VLM.10	VL200	110
VLM.10/O	VL400	110
VLM/PT	VL201	137
VPC.2	VP300	60
VPC.2 (EX)I	VP310	60
VPC.2 (EX)I/D	VP400	60
VPC.2/GR	VP300GR	60
VPC.2/GV	VP320	60
VPC/F02	VP902	60
VPC/F03	VP903	60
VPC/F04	VP904	60
VPC/F05	VP905	60
VPC/F06	VP906	60
VPC/F07	VP907	60
VPC/F08	VP908	60
VPC/F09	VP909	60
VPC/F10	VP910	60
VPC/F11	VP911	60
VPC/F12	VP912	60
VPC/F13	VP913	60
VPC/F14	VP914	60

# Alphabetical index

TYPE	CAT. NO.	PAGE
VPC/F15	VP915	60
VPC/F16	VP916	60
VPC/PT	VP101	60
VPC/PT	VP101	137
VPC/PT(EX)I	VP201	137
VPC/PTF	VP303	60
VPC/VT	VP102	60
VPD.2	VP500	61
VPD.2 (EX)I	VP560	61
VPD.2/GR	VP500GR	61
VPD/PT	VP501	137
VPD/PT(EX)I	VP561	137
W WP100-21	WP30024	170
WP1-14	WP30009	170
WP15-14	WP30013	170
WP160-22	WP30026	170
WP250-29	WP30028	170
WP25-14	WP30016	170
WP350-30	WP30030	170
WP40-16	WP30019	170
WP500-40	WP30032	170
WP5-14	WP30002	170
WP60-20	WP30022	170
WP75-14	WP30005	170
WPD01/15	WP90003	170
WPD04/23	WP90006	170
WPD05/15	WP90001	170
WPD15/16	WP90004	170
WPD25/18	WP90005	170
WPD75/15	WP90002	170

# Index by Catalogue number

CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE
<b>A</b>								
AC100	ACB.70/BB	20	CBX53	CB16/PT(EX)I	137	CPM21	CPM/21	151
AC400	ACB.120/BB	20	CBX62	CBD.35 (EX)I	14	CPM25	CPM/25	151
AC700	ACB.185/BB	20	CBX63	CB35/PT(EX)I	137	CPM44	CPM/44	151
AF201	AFO/PT	137	CBX72	CBD.50 (EX)I	15	CPM53	CPM/53	151
AF400	AFO.2/2+2	54	CBX73	CB50/PT(EX)I	137	CPM56	CPM/56	151
AF410	AFO.2/2+2/TP	54	CBX82	CBD.70 (EX)I	15	CPM57	CPM/57	151
AF420	AFO.2/2+2/TPM	54	CBX83	CB70/PT(EX)I	137	CPM70	CPM/70	151
<b>B</b>								
AF500	AFO.2/1+1	54	CCH02	CCH/2,5-4	169	CPM83	CPM/83	151
BP100	BPL.4	67	CCH06	CCH/6	169	CPM99	CPM/99	151
BP200	BPL/R	67	CCV03	CCV/2,5	169	CPX01	CPX/01	151
BP300	BPL.4/PS	68	CCV04	CCV/4	169	CPX03	CPX/03	151
BP310	BPL.4/PS/A	68	CCV05	CCV/5	169	CPX05	CPX/05	151
BP320	BPL.4/PS/B	68	CD003	CDA/BT	138	CPX06	CPX/06	151
BT001	BT/DIN/PO	138	CD100	CDA.70/BB	118	CPX07	CPX/07	151
BT003	BT/3	138	CD101	CDA.70/PT	137	CPX08	CPX/08	151
BT006	BT/2	138	CD200	CDA.70/BC	117	CPX11	CPX/11	151
BT007	BTO	138	CD300	CDA.70/CC	116	CPX12	CPX/12	151
<b>C</b>								
CAMUT02	CAMUT.12/02	132	CD400	CDA.120/BB	118	CPX13	CPX/13	151
CAMUT04	CAMUT.12/04	132	CD401	CDA/120/PT	137	CPX14	CPX/14	151
CAMUT06	CAMUT.12/06	132	CD500	CDA.120/BC	117	CPX16	CPX/16	151
CAMUT10	CAMUT.12/10	132	CD600	CDA.120/CC	116	CPX21	CPX/21	151
CAMUT16	CAMUT.12/16	132	CD701	CDA/185/PT	137	CPX44	CPX/44	151
CAMUT25	CAMUT.12/25	132	CD710	CDA.185/BB	118	CPX83	CPX/83	151
CAMUT35	CAMUT.12/35	132	CD810	CDA.185/BC	117	CR110	CBR.2	5
CB009	CBD/SH	168	CD910	CDA.185/CC	116	CR110GR	CBR.2/GR	5
CB061	CBC.2-10/PT	137	CE110	CBE.2	23	CR111	CBR/PT	137
CB110	CBD.2	13	CF100	CF.12/1+1	57	CSBR5400	SUPP/5400	133
CB111	CB2/PT	137	CF200	CF.12/2+2	58	CV100	CVF.4	55
CB161	CBC.16/PT	137	CF301	CF/PTM	57	CV101	CVF/PT	137
CB240	CBD.4	13	CF400	CF.08/2+2	58	CV110	CVF.4/VS	56
CB241	CB4/6/PT	137	CF900	CF.12/CPT	57	CV120	CVF.4/WW	56
CB340	CBD.6	13	CFA10	CF.12/1+1/AG	57	CV130	CVF.4/VS2	56
CB351	CBC.35/PT	137	CFW90	CF.12/FW/CPT	57	CV140	CVF.4/TP	56
CB431	CB10/PT	137	CFW99	CF.12/FW/CPT (EX)I	57	CV200	CVF.4 (EX)I	55
CB440	CBD.10	14	CFX10	CF.12/1+1 (EX)I	57	CV201	CVF/PT(EX)I	137
CB510	CBD.16	14	CFX90	CF.12/CPT (EX)I	57	<b>D</b>		
CB511	CB16/PT	137				DA100	DSFA.4	35
CB610	CBD.35	14	NNT06	NNT.6	69	DA100GR	DSFA.4/GR	35
CB611	CB35/PT	137	NNT16	NNT.16	69	DA112	DSFA.4/L12	35
CB710	CBD.50	15	NNT35	NNT.35	69	DA124	DSFA.4/L24	35
CB711	CB50/PT	137	CONT206	CONTC/2/6	131	DA200GR	DSF.4/GR	34
CB810	CBD.70	15	CONT216	CONTC/2/16	131	DB100	DBC.2	26
CB811	CB70/PT	137	CONT225	CONTC/2/25	131	DB100GR	DBC.2/GR	26
CBC02	CBC.2	3	CONT235	CONTC/2/35	131	DB101	DBC/PT	137
CBC02GR	CBC.2/GR	3	CONT306	CONTC/3/6	131	DB117	DBC.2/CI	26
CBC04	CBC.4	3	CONT316	CONTC/3/16	131	DB117GR	DBC.2/CI/GR	26
CBC04GR	CBC.4/GR	3	CONT325	CONTC/3/25	131	DB200	DBC.2 (EX)I	26
CBC06	CBC.6	3	CONT506	CONTC/5/6	131	DB201	DBC/PT(EX)I	137
CBC06GR	CBC.6/GR	3	CONT516	CONTC/5/16	131	DC005	SDC/5	153
CBC10	CBC.10	4	CONT525	CONTC/5/25	131	DC006	SDC/6	153
CBC10GR	CBC.10/GR	4	CONTC01	CONTC/1,5	130	DC05P	SDC/5P	153
CBC16	CBC.16	4	CONTC02	CONTC/2,5	130	DC05V	SDC/5V	153
CBC16GR	CBC.16/GR	4	CONTC04	CONTC/4	130	DC06P	SDC/6P	153
CBC35	CBC.35	4	CONTC06	CONTC/6	130	DC06V	SDC/6V	153
CBC35GR	CBC.35/GR	4	CONTC10	CONTC/10	130	DCPOL	SDC/POL	153
CBI02	CBC.2 (EX)I	3	CONTC16	CONTC/16	130	DD001	SDD/1	154
CBI04	CBC.4 (EX)I	3	CONTC25	CONTC/25	130	DD002	SDD/2	154
CBI06	CBC.6 (EX)I	3	CONTC35	CONTC/35	130	DD005	SDD/5	153
CBI061	CBC.2-10/PT(EX)I	137	CPF05	CPF/5	36	DD006	SDD/6	153
CBI10	CBC.10 (EX)I	4	CPF05	CPF/5	87	DD02	SDD/2	154
CBI16	CBC.16 (EX)I	4	CPM01	CPM/01	151	DD501	SD5/PT	153
CBI161	CBC.16/PT(EX)I	137	CPM03	CPM/03	151	DD601	SD6/PT	153
CBI35	CBC.35 (EX)I	4	CPM05	CPM/05	151	DF300	DFM/300	157
CBI351	CBC.35/PT(EX)I	137	CPM06	CPM/06	151	DF400	DFM/400	157
CBX12	CBD.2 (EX)I	13	CPM07	CPM/07	151	DF500	DFM/500	157
CBX13	CB2/PT(EX)I	137	CPM08	CPM/08	151	DF600	DFM/600	157
CBX24	CBD.4 (EX)I	13	CPM11	CPM/11	151	DF700	DFM/700	157
CBX25	CB4/6/PT(EX)I	137	CPM12	CPM/12	151	DF800	DFM/800	157
CBX34	CBD.6 (EX)I	13	CPM13	CPM/13	151	DF900	DFM/900	157
CBX44	CB10/PT(EX)I	137	CPM14	CPM/14	151	DFP2B	DFP/2/BIANCO	156
CBX45	CBD.10 (EX)I	14	CPM16	CPM/16	151	DFP2R	DFP/2/ROSSO	156
CBX52	CBD.16 (EX)I	14	CPM17	CPM/17	151	DFP2V	DFP/2/VERDE	156
			CPM20	CPM/20	151	DH004	SDH/4	153



# Index by Catalogue number

CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE
DH005	SDH/5	153	DSV120GR	DAS.4/V120/GR	52	FL400	FLD.10/F5	108
DH006	SDH/6	153	DSV230	DAS.4/V230	52	FL404	CF5	108
DH007	SDH/7	153	DSV230GR	DAS.4/V230/GR	52	FL500	FLD.10/D	109
DH01B	DFH/1/BIANCO	156	DU01B	DFU/1/BIANCO	156	FL504	CFD	109
DH01R	DFH/1/ROSSO	156	DU01R	DFU/1/ROSSO	156	FN001ST	F5/100 MA	155
DH01V	DFH/1/VERDE	156	DU01V	DFU/1/VERDE	156	FN002ST	F5/200 MA	155
DH02B	DFH/2/BIANCO	156	DU02B	DFU/2/BIANCO	156	FN003ST	F5/315 MA	155
DH02R	DFH/2/ROSSO	156	DU02R	DFU/2/ROSSO	156	FN004ST	F5/500 MA	155
DH02V	DFH/2/VERDE	156	DU02S	DF/VP	60	FN005ST	F5/630 MA	155
DH03B	DFH/3/BIANCO	156	DU02V	DFU/2/VERDE	156	FN006ST	F5/1 A	155
DH03R	DFH/3/ROSSO	156	DU03B	DFU/3/BIANCO	156	FN007ST	F5/1,6 A	155
DH03V	DFH/3/VERDE	156	DU03R	DFU/3/ROSSO	156	FN008ST	F5/2 A	155
DH04B	DFH/4/BIANCO	156	DU03V	DFU/3/VERDE	156	FN009ST	F5/2,5 A	155
DH04P	SDH/4P	153	DU04B	DFU/4/BIANCO	156	FN010ST	F5/3,15 A	155
DH04R	DFH/4/ROSSO	156	DU04R	DFU/4/ROSSO	156	FN011ST	F5/4 A	155
DH04V	DFH/4/VERDE	156	DU04V	DFU/4/VERDE	156	FN012ST	F5/5 A	155
DH07P	SDH/7P	153	DU05B	DFU/5/BIANCO	156	FN013ST	F5/6,3 A	155
DH401	SH4/PT	153	DU05R	DFU/5/ROSSO	156	FN014ST	F5/8 A	155
DH501	SH5/PT	153	DU05V	DFU/5/VERDE	156	FN015ST	F5/10 A	155
DH601	SH6/PT	153	DU06B	DFU/6/BIANCO	156	FN016ST	F5/12 A	155
DH701	SH7/PT	153	DU06R	DFU/6/ROSSO	156	FP100	FPC.10	37
DS100	DAS.4	27	DU06V	DFU/6/VERDE	156	FP100	FPC.10	44
DS100GR	DAS.4/GR	27	DU07B	DFU/7/BIANCO	156	FP200	FPL.10/L	37
DS101	DAS/PT	137	DU07R	DFU/7/ROSSO	156	FP300	FPL.10/C	37
DS107	DAS/VCI	168	DU07V	DFU/7/VERDE	156	FP912	FPL.10/C12	39
DS108	DAS/VCE	168	ED110	EDM.2	99	FP915	FPL.10/C115	39
DS110	DAS.4/SS	28	ED111	EDM2/PT	137	FP923	FPL.10/C230	39
DS110GR	DAS.4/SS/GR	28	ED111	EDM2/PT	137	FP924	FPL.10/C24	39
DS111	DAS.4/A	53	ED210	EDM.4	99	FP948	FPL.10/C48	39
DS111GR	DAS.4/A/GR	53	ED310	EDM.6	99	FV100	FVS.4	29
DS112	DAS.4/B	53	ED400	EDM.10	100	FV100GR	FVS.4/GR	29
DS112GR	DAS.4/B/GR	53	ED401	EDM/4-10/PT	137	FV101	FVS/PT	137
DS113	DAS.4/C	53	ED500	EDM.16	100	FV107	FVS/VCI	168
DS113GR	DAS.4/C/GR	53	ED513GR	EDM/16/PT	137	FV108	FVS/VCE	168
DS114	DAS.4/D	53	ED600	EDM.25	100	GA100	GPA.95	6
DS114GR	DAS.4/D/GR	53	ED601	EDM/25/PT	137	GA100GR	GPA.95/GR	6
DS115	DAS.4/E	53	ED700	EDM.35	101	GA200	GPA.150	7
DS115GR	DAS.4/E/GR	53	ED701	EDM/35/PT	137	GA200GR	GPA.150/GR	7
DS117	DAS.4/CI	27	ED801	EDM/70/PT	137	GA300	GPA.240	7
DS117GR	DAS.4/CI/GR	27	ED820	EDM.70	101	GA300GR	GPA.240/GR	7
DS119	DAS.4/I	53	ED860	EDM.70/BC	101	GA400	GPA.70	6
DS119GR	DAS.4/I/GR	53	EI101	EDM2/PT(EX)I	137	GA400GR	GPA.70/GR	6
DS120	DAS.4/DD	53	EI110	EDM.2 (EX)I	99	GF100	GPA.95/FIX	6
DS120GR	DAS.4/DD/GR	53	EI111	EDM/2/PT(EX)I	137	GF200	GPA.150/FIX	7
DS128	DAS.4/T	53	EI210	EDM.4 (EX)I	99	GF300	GPA.240/FIX	7
DS128GR	DAS.4/T/GR	53	EI310	EDM.6 (EX)I	99	GF400	GPA.70/FIX	6
DS129	DAS.4/U	53	EI400	EDM.10 (EX)I	100	GP100	GPM.95/BB	17
DS129GR	DAS.4/U/GR	53	EI401	EDM/4-10/PT(EX)I	137	GP110	GPM.95/BB/FIX	17
DS130	DAS.4/L	53	EI500	EDM.16 (EX)I	100	GP200	GPM.95/BC	18
DS130GR	DAS.4/L/GR	53	EI501	EDM/16/PT(EX)I	137	GP210	GPM.95/BC/FIX	18
DS200	DAS.4 (EX)I	27	EI600	EDM.25 (EX)I	100	GP300	GPM.95/CC	19
DS201	DAS/PT(EX)I	137	EI601	EDM/25/PT(EX)I	137	GP310	GPM.95/CC/FIX	19
DS217	DAS.4/CI (EX)I	27	EI700	EDM.35 (EX)I	101	GP400	GPM.150/BB	17
DS301	DSS/PT	137	EI701	EDM/35/PT(EX)I	137	GP410	GPM.150/BB/FIX	17
DS400	DSS.4	28	EI801	EDM/70/PT(EX)I	137	GP500	GPM.150/BC	18
DS400	DSS.4	41	EI810	EDM.70 (EX)I	101	GP510	GPM.150/BC/FIX	18
DS400GR	DSS.4/GR	28	FC100	SFC.10	108	GP600	GPM.150/CC	19
DS400GR	DSS.4/GR	41	FC101	SFC/PT	137	GP610	GPM.150/CC/FIX	19
DS401GR	DFS.4/PT/GR	137	FC102	SFC/CO	168	GP700	GPM.240/BB	17
DSD005	DAS.4/D5	51	FC103	MSM	159	GP710	GPM.240/BB/FIX	17
DSD005GR	DAS.4/D5/GR	51	FC200	SFL.10	108	GP800	GPM.240/BC	18
DSD012	DAS.4/D12	51	FD100	FDP.2	55	GP810	GPM.240/BC/FIX	18
DSD012GR	DAS.4/D12/GR	51	FD100GR	FDP.2/GR	55	GP900	GPM.240/CC	19
DSD024	DAS.4/D24	51	FD101	FDP/PT	137	GP910	GPM.240/CC/FIX	19
DSD024GR	DAS.4/D24/GR	51	FF100	FFS.4	29	HB100GR	HSCB.4/GR	86
DSD060	DAS.4/D60	51	FF100GR	FFS.4/GR	29	HB101GR	HSCB.4/PT/GR	137
DSD060GR	DAS.4/D60/GR	51	FF101	FFS/PT	137	HB200GR	HSCB.6/GR	86
DSV024	DAS.4/V24	52	FL101	FLD/PT	137	HB201GR	HSCB.6/PT/GR	137
DSV024GR	DAS.4/V24/GR	52	FL200	FLD.10/F5L	109	HB203	HSCB.6/PO/2	168
DSV048	DAS.4/V48	52	FL204	CF5L	109	HB204	HSCB.6/PO/4	168
DSV048GR	DAS.4/V48/GR	52	FL300	FLD.10/F6	109	HB205	HSCB.6/CPM	168
DSV120	DAS.4/V120	52	FL304	CF6	109	HC200GR	HCD.1/GR	90

# Index by Catalogue number

CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE
HC201GR	HCD.1/PT/GR	137	HM411GR	HMT.1/1+2/PT	137	MC202R	MCM.2/R	121
HC210	HCD.1 (EX)I	90	HM420GR	HMM.1/2+2/GR	72	MC203B	MCM.3/B	121
HD100GR	HMD.2/GR	82	HM421GR	HMT.1/2+2/PT	137	MC203G	MCM.3/G	121
HD101GR	HMD/PT/GR	137	HM500GR	HMM.2/GR	73	MC203R	MCM.3/R	121
HD120GR	HMD.1/CI/GR	82	HM501GR	HMT.2/PT	137	MC233B	MCM.3/VE/B	122
HD130GR	HMD.1/X/GR	83	HM501GR	HMT.2/PT/GR	137	MC233G	MCM.3/VE/G	122
HD200GR	HMD.1/GR	82	HM510GR	HMM.2/1+2/GR	73	MC233R	MCM.3/VE/R	122
HD201GR	HMD.1/PT/GR	137	HM511GR	HMT.2/1+2/PT	137	MC401B	MCT.1/SA/B	123
HD300	HMD.1 (EX)I	82	HM511GR	HMT.2/1+2/PT/GR	137	MC401G	MCT.1/SA/G	123
HD301	HMD.1/PT(EX)I	137	HM511GR	HMT.2/2+2/PT/GR	137	MC401R	MCT.1/SA/R	123
HD400GR	HMD.2N/GR	82	HM520GR	HMM.2/2+2/GR	73	MC402B	MCT.2/SA/B	123
HD410	HMD.2N (EX)I	82	HM521GR	HMT.2/1+2/PT/GR	137	MC402G	MCT.2/SA/G	123
HD420GR	HMD.2N/DD/GR	83	HM521GR	HMT.2/2+2/PT	137	MC402R	MCT.2/SA/R	123
HD430GR	HMD.2N/3DC/GR	83	HM521GR	HMT.2/2+2/PT/GR	137	MC403B	MCT.3/SA/B	124
HD440GR	HMD.2N/X/GR	83	HMS10GR	HMM.2/2+2/S/GR	74	MC403G	MCT.3/SA/G	124
HD441GR	HMD.2N/X1/GR	84	HMS20GR	HMM.2/1+2/S/GR	74	MC403R	MCT.3/SA/R	124
HD450GR	HMD.2N/CI/GR	82	HP150GR	HP.2/GR	93	MF100	MPFA.4	35
HD510GR	HL.D.2 (EX)I	85	HP160GR	HPC.2/GR	94	MF100GR	MPFA.4/GR	35
HF110GR	HMF.4/GR	88	HP170GR	HPP.2/GR	93	MF112	MPFA.4/L12	35
HF111GR	HMF/PT/GR	137	HP201	HP/PT(EX)I	137	MF124	MPFA.4/L24	35
HF210GR	HFR.4/GR	89	HS200GR	HMS.2/GR	86	MP120	MPS.2/SW	40
HF211GR	HFR.4/PT/GR	137	HT250	HTE.4	80	MP120GR	MPS.2/SW/GR	40
HF212GR	HMF.4/L12/GR	88	HT260	HTE.4/1+2	80	MP121	MPS.2/PT	137
HF224GR	HMF.4/L24/GR	88	HT270	HTE.4/2+2	80	MP130	MPS.2/SW (EX)I	40
HF248GR	HMF.4/L48/GR	88	HT310	HTE.6	81	MP131	MPS.2/PT(EX)I	137
HF300GR	HMFA.2/GR	87	HT330	HTE.10	81	MP220	MPS.2/SV	40
HF310GR	HFR.4/M/GR	89	HT340	HTE.16	81	MP710	MPS.2/SWP	40
HI130	HP.2 (EX)I	93	HT400	HTE.1	78	MP710GR	MPS.2/SWP/GR	40
HI131	HPC.2 (EX)I	94	HT410	HTE.1/1+2	78	MP901	MPS.4/PT	137
HI132	HPP.2 (EX)I	93	HT420	HTE.1/2+2	78	MP902	MPS.4/PT(EX)I	137
HI210	HMM.4/1+2 (EX)I	75	HT500	HTE.2	79	MP930	MPS.4/VS	41
HI220	HMM.4/2+2 (EX)I	75	HT510	HTE.2/1+2	79	MP950	MPS.4	41
HI250	HMM.4 (EX)I	75	HT520	HTE.2/2+2	79	MP950GR	MPS.4/GR	41
HI251	HMT.4/PT(EX)I	137	HV101GR	HP/PT/GR	137	MP960	MPS.4/SW (EX)I	41
HI310	HMM.6 (EX)I	76	HV111GR	HPV/PT/GR	137	MZ300N	MS/8X10/N	125
HI321	HMT.6/PT(EX)I	137	HVP300GR	HVPC.2/GR	91	MZ300T	MS/8X10/T	125
HI330	HMM.10 (EX)I	76	HVP900GR	CHP.2/GR	91	N5015	CNU/5/015	166
HI340	HMM.16 (EX)I	76	HVP910GR	CHP.2D/GR	91	N5016	CNU/5/016	166
HI400	HMM.1 (EX)I	72	HVT500	HVTE.2	92	N5017	CNU/5/017	166
HI401	HMT.1/PT(EX)I	137	HVT900	CHTE.2	92	N5018	CNU/5/018	166
HI410	HMM.1/1+2 (EX)I	72	HVT910	CHTE.2D	92	N5023	CNU/5/023	166
HI411	HMT.1/1+2/PT(EX)I	137	INKBOTT1	INKBOTT1	163	N5024	CNU/5/024	166
HI420	HMM.1/2+2 (EX)I	72	INKCART5	INKCART5	163	N5025	CNU/5/025	166
HI421	HMT.1/2+2/PT(EX)I	137	KITCABURBG	ADRKITGR	163	N5026	CNU/5/026	166
HI500	HMM.2 (EX)I	73	KITCABUREK	ADRKITEK	163	N5027	CNU/5/027	166
HI501	HMT.2/PT(EX)I	137	KITCABURMU	ADRKITMU	163	N5029	CNU/5/029	166
HI510	HMM.2/1+2 (EX)I	73	KITPULIZIA	KITPULIZIA	163	N5110	CNU/5/110	166
HI511	HMT.2/1+2/PT(EX)I	137	KSLOTTER	KSLOTTER	163	N5123	CNU/5/123	166
HI520	HMM.2/2+2 (EX)I	73	LS001	LSH/12	155	N5250	CNU/5/250	166
HI521	HMT.2/2+2/PT(EX)I	137	LS002	LSH/24	155	N5350	CNU/5/350	166
HL200GR	HL.D.2/GR	85	LS003	LSH/48	155	NC100	NCS	96
HL201GR	HL.D.2/PT/GR	137	LS004	LSH/115	155	NC101	NCS/PT	137
HL210GR	HL.D.2/CI/GR	85	LS005	LSH/230	155	NC200	NCV	96
HL500GR	HDE.2/GR	85	MA010	MAC/PLZ	63	NU005	CNU/5/030	166
HLT500	HTTE.2	85	MA030	MAC/COS	63	NU0851	CNU/8/030	164
HM170GR	HMM.2/2+2/A/GR	74	MA040	MAC/CP8	63	NU0851	CNU/8/030	164
HM210GR	HMM.4/1+2/GR	75	MA100	MAC.6	62	NU0851	CNU/8/51	163
HM220GR	HMM.4/2+2/GR	75	MA110	CAM	63	NU08510	CNU/8/000	164
HM250GR	HMM.4/GR	75	MA111	CAM/B	63	NU0851010	CNU/8/010	164
HM251GR	HMT.4/PT	137	MA112	CAM/C	63	NU0851010V	CNU/8/010	164
HM251GR	HMT.4/PT/GR	137	MA200	MAC.6/N	62	NU0851011	CNU/8/11	165
HM310GR	HMM.6/GR	76	MA410	MAC.6/FS	62	NU0851011V	CNU/8/11	165
HM321GR	HMT.6/PT	137	MA500	MAC.6/VS	62	NU0851012	CNU/8/12	165
HM321GR	HMT.6/PT/GR	137	MB100	MBL.50/6	21	NU0851012V	CNU/8/12	165
HM330GR	HMM.10/GR	76	MB200	MBL.95/8	21	NU0851013	CNU/8/13	165
HM340GR	HMM.16/GR	76	MB300	MBL.120/10	22	NU0851013V	CNU/8/13	165
HM350GR	HMR.16/GR	77	MB400	MBL.150/12	22	NU0851014	CNU/8/14	165
HM360GR	HMR.16/D/GR	77	MC201B	MCM.1/B	120	NU0851014V	CNU/8/14	165
HM400GR	HMM.1/GR	72	MC201G	MCM.1/G	120	NU0851015	CNU/8/15	165
HM401GR	HMT.1/PT	137	MC201R	MCM.1/R	120	NU0851015V	CNU/8/15	165
HM401GR	HMT.1/PT/GR	137	MC202B	MCM.2/B	121	NU0851016	CNU/8/16	165
HM410GR	HMM.1/1+2/GR	72	MC202G	MCM.2/G	121	NU0851016V	CNU/8/16	165

## Index by Catalogue number

CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE
NU0851017	CNU/8/17	165	NU0851401	CNU/8/401	165	NU0851IV	CNU/8/043	164
NU0851017V	CNU/8/17	165	NU0851401V	CNU/8/401	165	NU0851J	CNU/8/049	164
NU0851018	CNU/8/18	165	NU0851451	CNU/8/451	165	NU0851JV	CNU/8/049	164
NU0851018V	CNU/8/18	165	NU0851451V	CNU/8/451	165	NU0851K	CNU/8/050	164
NU0851019	CNU/8/19	165	NU08514V	CNU/8/444	165	NU0851KV	CNU/8/050	164
NU0851019V	CNU/8/19	165	NU08515	CNU/8/555	165	NU0851L	CNU/8/044	164
NU0851020	CNU/8/20	165	NU0851501	CNU/8/501	165	NU0851LV	CNU/8/044	164
NU0851020V	CNU/8/20	165	NU0851501V	CNU/8/501	165	NU0851M	CNU/8/045	164
NU085102A	CNU/8/2A	164	NU0851510	CNU/8/510	165	NU0851MV	CNU/8/045	164
NU085102AV	CNU/8/2A	164	NU0851510V	CNU/8/510	165	NU0851N	CNU/8/016	164
NU0851051	CNU/8/051	164	NU0851520	CNU/8/520	165	NU0851NV	CNU/8/016	164
NU0851051V	CNU/8/051	164	NU0851520V	CNU/8/520	165	NU0851O	CNU/8/046	164
NU08510L1	CNU/8/L1	164	NU0851530	CNU/8/530	165	NU0851OV	CNU/8/046	164
NU08510L1V	CNU/8/L1	164	NU0851530V	CNU/8/530	165	NU0851P	CNU/8/047	164
NU08510L2	CNU/8/L2	164	NU0851540	CNU/8/540	165	NU0851PV	CNU/8/047	164
NU08510L2V	CNU/8/L2	164	NU0851540V	CNU/8/540	165	NU0851Q	CNU/8/048	164
NU08510L3	CNU/8/L3	164	NU0851550	CNU/8/550	165	NU0851QV	CNU/8/048	164
NU08510L3V	CNU/8/L3	164	NU0851550V	CNU/8/550	165	NU0851R	CNU/8/013	164
NU08510NI	CNU/8/NI	164	NU0851551	CNU/8/551	165	NU0851RV	CNU/8/013	164
NU08510NIV	CNU/8/NI	164	NU0851551V	CNU/8/551	165	NU0851S	CNU/8/014	164
NU08510PE	CNU/8/PE	164	NU0851560	CNU/8/560	165	NU0851SP	CNU/8/51	167
NU08510PEV	CNU/8/PE	164	NU0851560V	CNU/8/560	165	NU0851SV	CNU/8/014	164
NU08510R1	CNU/8/R1	164	NU0851570	CNU/8/570	165	NU0851T	CNU/8/015	164
NU08510R1V	CNU/8/R1	164	NU0851570V	CNU/8/570	165	NU0851TV	CNU/8/015	164
NU08510S1	CNU/8/S1	164	NU0851580	CNU/8/580	165	NU0851U	CNU/8/017	164
NU08510S1V	CNU/8/S1	164	NU0851580V	CNU/8/580	165	NU0851UV	CNU/8/017	164
NU08510S2	CNU/8/S2	164	NU0851590	CNU/8/590	165	NU0851V	CNU/8/018	164
NU08510S2V	CNU/8/S2	164	NU0851590V	CNU/8/590	165	NU0851VW	CNU/8/018	164
NU08510S3	CNU/8/S3	164	NU08515V	CNU/8/555	165	NU0851W	CNU/8/019	164
NU08510S3V	CNU/8/S3	164	NU08516	CNU/8/666	165	NU0851WV	CNU/8/019	164
NU08510U1	CNU/8/U1	164	NU0851600	CNU/8/600	165	NU0851X	CNU/8/020	164
NU08510U1V	CNU/8/U1	164	NU0851600V	CNU/8/600	165	NU0851XV	CNU/8/020	164
NU08510U2	CNU/8/U2	164	NU0851601	CNU/8/601	165	NU0851Y	CNU/8/021	164
NU08510U2V	CNU/8/U2	164	NU0851601V	CNU/8/601	165	NU0851YV	CNU/8/021	164
NU08510V	CNU/8/000	164	NU0851651	CNU/8/651	165	NU0851Z	CNU/8/022	164
NU08510V1	CNU/8/V1	164	NU0851651V	CNU/8/651	165	NU0851ZV	CNU/8/022	164
NU08510V1V	CNU/8/V1	164	NU08516V	CNU/8/666	165	NU0855001	CNU/8/001	164
NU08510V2	CNU/8/V2	164	NU08517	CNU/8/777	165	NU0855001V	CNU/8/001	164
NU08510V2V	CNU/8/V2	164	NU0851701	CNU/8/701	165	NU0861	CNU/8/61	163
NU08510W1	CNU/8/W1	164	NU0851701V	CNU/8/701	165	NU0861SP	CNU/8/61	167
NU08510W1V	CNU/8/W1	164	NU0851751	CNU/8/751	165	NU1051	CNU/10/51	163
NU08510W2	CNU/8/W2	164	NU0851751V	CNU/8/751	165	NU1051SP	CNU/10/51	167
NU08510W2V	CNU/8/W2	164	NU08517V	CNU/8/777	165	NU1061	CNU/10/61	163
NU08511	CNU/8/111	164	NU08518	CNU/8/888	165	NU1061SP	CNU/10/61	167
NU085110	CNU/8/025	164	NU0851801	CNU/8/801	165	<b>P</b> PADCABUR	PADCABUR	163
NU0851101	CNU/8/101	164	NU0851801V	CNU/8/801	165	PADGRAPH	PADGRAPH	163
NU0851101V	CNU/8/101	164	NU0851851	CNU/8/851	165	PADMUTHO	PADMUTHO	163
NU085110V	CNU/8/025	164	NU0851851V	CNU/8/851	165	PD001	PSD/A	154
NU0851111	CNU/8/023	164	NU08518V	CNU/8/888	165	PD002	PSD/B	154
NU0851115	CNU/8/028	164	NU08519	CNU/8/999	165	PD003	PSD/C	154
NU085111V	CNU/8/023	164	NU0851901	CNU/8/901	165	PD004	PSD/D	154
NU085112	CNU/8/024	164	NU0851901V	CNU/8/901	165	PD005	PSD/E	154
NU085112V	CNU/8/024	164	NU0851951	CNU/8/951	165	PD009	PSD/L	154
NU085114	CNU/8/027	164	NU0851951V	CNU/8/951	165	PD011	PSD/K	154
NU085114V	CNU/8/027	164	NU08519V	CNU/8/999	165	PD013	PSD/N	154
NU0851151	CNU/8/151	164	NU0851A	CNU/8/031	164	PD014	PSD/J	154
NU0851151V	CNU/8/151	164	NU0851AV	CNU/8/031	164	PD015	PSD/P	154
NU085115V	CNU/8/028	164	NU0851B	CNU/8/032	164	PD017	PSD/O	154
NU08511V	CNU/8/111	164	NU0851BV	CNU/8/032	164	PD15	PSD/P	154
NU08512	CNU/8/222	164	NU0851C	CNU/8/033	164	PEN025CAB	PEN025CAB	163
NU0851201	CNU/8/201	164	NU0851CV	CNU/8/033	164	PEN035CAB	PEN035CAB	163
NU0851201V	CNU/8/201	164	NU0851D	CNU/8/034	164	PEN035GRA	PEN035GRA	163
NU0851251	CNU/8/251	165	NU0851DV	CNU/8/034	164	PF100	PDF.2	55
NU0851251V	CNU/8/251	165	NU0851E	CNU/8/035	164	PF101	PDF/PT	137
NU08512V	CNU/8/222	165	NU0851EV	CNU/8/035	164	PH100	PH/2,5-4	145
NU08513	CNU/8/333	165	NU0851F	CNU/8/036	164	PH100	PH/2,5-4	149
NU0851301	CNU/8/301	165	NU0851FV	CNU/8/036	164	PHD02	PHD/2	149
NU0851301V	CNU/8/301	165	NU0851G	CNU/8/037	164	PHM01	PHM/2,5/4	149
NU0851351	CNU/8/351	165	NU0851GV	CNU/8/037	164	PM100	PM/10/10	145
NU0851351V	CNU/8/351	165	NU0851H	CNU/8/038	164	PM102	PM/10/2	145
NU08513V	CNU/8/333	165	NU0851HV	CNU/8/038	164	PM103	PM/10/3	145
NU08514	CNU/8/444	165	NU0851I	CNU/8/043	164	PM105	PM/10/5	145

# Index by Catalogue number

CAT. NO.	TYPE	PAGE
PM110	PM/11/10	145
PM112	PM/11/2	145
PM113	PM/11/3	145
PM115	PM/11/5	145
PM120	PM/12/10	145
PM122	PM/12/2	145
PM123	PM/12/3	145
PM125	PM/12/5	145
PM202	PM/20/2	145
PM203	PM/20/3	145
PM205	PM/20/5	145
PM210	PM/20/10	145
PM250	PM/25/10	145
PM252	PM/25/2	145
PM253	PM/25/3	145
PM255	PM/25/5	145
PM303	PM/30/3	145
PM305	PM/30/5	145
PM310	PM/30/10	145
PM400	PM/40/10	145
PM402	PM/40/2	145
PM403	PM/40/3	145
PM405	PM/40/5	145
PM410	PM/41/10	145
PM412	PM/41/2	145
PM413	PM/41/3	145
PM415	PM/41/5	145
PM510	PM/51/10	145
PM513	PM/51/3	145
PM515	PM/51/5	145
PM602	PM/60/2	145
PM603	PM/60/3	145
PM605	PM/60/5	145
PM610	PM/60/10	145
PM900	PM/90/10	145
PM902	PM/90/2	145
PM903	PM/90/3	145
PM905	PM/90/5	145
PM910	PM/91/10	145
PM912	PM/91/2	145
PM913	PM/91/3	145
PM915	PM/91/5	145
PMP01	PMP/01	151
PMP02	PMP/02	151
PMP04	PMP/04	151
PMP05	PMP/05	151
PMP06	PMP/06	151
PMP07	PMP/07	151
PMP08	PMP/08	151
PMP12	PMP/12	151
PMP13	PMP/13	151
PMP14	PMP/14	151
PMP16	PMP/16	151
PMP17	PMP/17	151
PMP20	PMP/20	151
PMP25	PMP/25	151
PMP42	PMP/42	151
PMP54	PMP/54	151
PMP55	PMP/55	151
PMP56	PMP/56	151
PMP58	PMP/58	151
PO152	POF/150/2	150
PO153	POF/150/3	150
PO242	POF/240/2	150
PO243	POF/240/3	150
PO952	POF/95/2	150
PO953	POF/95/3	150
POF05	POF/05	150
POF06	POF/06	150
POF07	POF/07	150
POF08	POF/08	150
POF11	POF/11	150

CAT. NO.	TYPE	PAGE
POF12	POF/12	150
POF13	POF/13	150
POF14	POF/14	150
POF17	POF/17	150
POF20	POF/20	150
POF44	POF/44	150
POF53	POF/53	150
POF54	POF/54	150
POF55	POF/55	150
POF56	POF/56	150
POF57	POF/57	150
POF70	POF/70	150
POF99	POF/99	150
POMPASP	POMPASP	163
POS07	POS/07	152
POS08	POS/08	152
POS11	POS/11	152
POS12	POS/12	152
POS13	POS/13	152
POS14	POS/14	152
POS41	POS/41	152
POS42	POS/42	152
POS43	POS/43	152
POS44	POS/44	152
POS53	POS/53	152
POS66	POS/66	152
POS72	POS/72	152
POS91	POS/91	152
POS93	POS/93	152
PR001	PR/DIN/AC	140
PR002	PR/DIN/AL	140
PR003	PR/3/AC	139
PR004	PR/DIN/AS	140
PR005	PR/3/AS	139
PR006	PR/3/PA	139
PR007	PR/3/PP	139
PR009	PR/2/AC	140
PR010	PR/2/AS	140
PR901	PR/DIN/AC/ZB	140
PR903	PR/3/AC/ZB	139
PR904	PR/DIN/AS/ZB	140
PR905	PR/3/AS/ZB	139
PR906	PR/3/PA/ZB	139
PR907	PR/3/PP/ZB	139
PR909	PR/2/AC/ZB	140
PR910	PR/2/AS/ZB	140
PRP05	PRP/5	158
PRP06	PRP/6	158
PRP07	PRP/7	158
PRP070G	PRP/7/G	159
PRP08	PRP/8	158
PRT01	PRT/P	157
PRT02	PRT/M	157
PRT03	PRT/G	157
PTC0100	PTC/1/00	146
PTC0102	PTC/1/02	146
PTC0103	PTC/1/03	146
PTC0105	PTC/1/05	146
PTC0110	PTC/1/10	146
PTC0200	PTC/2/00	146
PTC0202	PTC/2/02	146
PTC0202	PTC/2/02	149
PTC0203	PTC/2/03	146
PTC0203	PTC/2/03	149
PTC0205	PTC/2/05	146
PTC0205	PTC/2/05	149
PTC0210	PTC/2/10	146
PTC0300	PTC/3/00	146
PTC0302	PTC/3/02	146
PTC0303	PTC/3/03	146
PTC0305	PTC/3/05	146
PTC0310	PTC/3/10	146

CAT. NO.	TYPE	PAGE
PTC0400	PTC/4/00	146
PTC0402	PTC/4/02	146
PTC0403	PTC/4/03	146
PTC0405	PTC/4/05	146
PTC0410	PTC/4/10	146
PTC0500	PTC/5/00	146
PTC0502	PTC/5/02	146
PTC0503	PTC/5/03	146
PTC0505	PTC/5/05	146
PTC0510	PTC/5/10	146
PTC0600	PTC/6/00	146
PTC0602	PTC/6/02	146
PTC0603	PTC/6/03	146
PTC0605	PTC/6/05	146
PTC0610	PTC/6/10	146
PTC0800	PTC/8/00	146
PTC0802	PTC/8/02	146
PTC0803	PTC/8/03	146
PTC0805	PTC/8/05	146
PTC0810	PTC/8/10	146
PTC1000	PTC/10/00	146
PTC1002	PTC/10/02	146
PTC1003	PTC/10/03	146
PTC1005	PTC/10/05	146
PTC1010	PTC/10/10	146
PTC1100	PTC/11/00	146
PTC1102	PTC/11/02	146
PTC1103	PTC/11/03	146
PTC1105	PTC/11/05	146
PTC1110	PTC/11/10	146
PTC1600	PTC/16/00	146
PTC1602	PTC/16/02	146
PTC1603	PTC/16/03	146
PTC1605	PTC/16/05	146
PTC1610	PTC/16/10	146
PTC2000	PTC/20/00	146
PTC2002	PTC/20/02	146
PTC2003	PTC/20/03	146
PTC2005	PTC/20/05	146
PTC2010	PTC/20/10	146
PZ110	PZM.6	158
PZ112	PZD.6/SO	158
PZ330	PZM.4	158
PZ331	PZD.4/SO	158
QBLOK1201	QBLOK.12/BLU	126
QBLOK1202	QBLOK.12/TE	126
QBLOK4100	QBLOK4P100A7	128
QBLOK4125	QBLOK4P125A11	128
QBLOK4126	QBLOK4P125A15	128
QBLOK7001	QBLOK.7/BLU	126
QBLOK7002	QBLOK.7/TE	126
QPOL1105	POLM.11/TRA	127
QPOL1203	POLM.1215	127
QPOL1204	POLM.1215/TE	127
QPOL1205	POLM.1215/BLU	127
QPOL1505	POLM.15/TRA	127
QPOL2100N	POLM.2/100/N	129
QPOL2125N	POLM.2/125/N	129
QPOL2126N	POLM.2/126/N	129
QPOL4160S	POLM.4/160/S	129
QPOL4161N	POLM.4/161/N	129
QPOL7005	POLM.7/TRA	127
RF101GR	RFN/PT/GR	137
RF110GR	RFI.2/GR	65
RF201	RFN/PT(EX)I	137
RN300GR	RN.1/GR	64
RN400	RN.1 (EX)I	64
RN500GR	RN.2/GR	64
RN510	RN.2 (EX)I	64
RP300GR	RP.4/GR	64
RP301GR	RP.4/PT/GR	137
RP400	RP.4 (EX)I	64

## Index by Catalogue number

CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE
<b>S</b> RP401	RP.4/PT(EX)I	137	SF910GR	SFR.4/VS/GR	33	SH4QQ	SHZ/1/QQ	166
SB200	SCB.6	46	SF912	SFR.4/C12	38	SH4RR	SHZ/1/RR	166
SB200GR	SCB.6/GR	46	SF915	SFR.4/C115	38	SH4SS	SHZ/1/SS	166
SB201	SCB/6/PT	137	SF923	SFR.4/C230	38	SH4TT	SHZ/1/TT	166
SB203	SCB/6/PO/2	168	SF924	SFR.4/C24	38	SH4UU	SHZ/1/UU	166
SB204	SCB/6/PO/4	168	SF948	SFR.4/C48	38	SH4VV	SHZ/1/VV	166
SB205	SCB/6/CPM	168	SH001	SHZ/2/00	166	SH4WW	SHZ/1/WW	166
SB210	SCB.6/DD	46	SH004	SHZ.1	163	SH4XX	SHZ/1/XX	166
SB210GR	SCB.6/DD/GR	46	SH004	SHZ/1/00	166	SH4YY	SHZ/1/YY	166
SB220	SCB.6/CD	46	SH004SP	SHZ.1	167	SH4ZZ	SHZ/1/ZZ	166
SB220GR	SCB.6/CD/GR	46	SH119	SHZ/2/19	166	SI100	SV.2 (EX)I	103
SB300	SCB.4	44	SH1AA	SHZ/2/AA	166	SI101	SV/2/PT(EX)I	137
SB300GR	SCB.4/GR	44	SH1BB	SHZ/2/BB	166	SI200	SV.4 (EX)I	103
SB301	SCB/4/PT	137	SH1CC	SHZ/2/CC	166	SI201	SV/4/PT(EX)I	137
SB303	SCB/4/PO/2	168	SH1DD	SHZ/2/DD	166	SI300	SV.6 (EX)I	104
SB304	SCB/4/PO/4	168	SH1EE	SHZ/2/EE	166	SI301	SV/6/PT(EX)I	137
SB305	SCB/4/CPM	168	SH1FF	SHZ/2/FF	166	SI400	SV.10 (EX)I	104
SB400	SCB.10	47	SH1G1	SHZ/2/G1	166	SI401	SV/10/PT(EX)I	137
SB400GR	SCB.10/GR	47	SH1G2	SHZ/2/G2	166	SR300	SFR.6	33
SB401	SCB/10/PT	137	SH1G3	SHZ/2/G3	166	SR300	SFR.6	44
SB410	SCB.10/DD	47	SH1G4	SHZ/2/G4	166	SR300GR	SFR.6/GR	33
SB410GR	SCB.10/DD/GR	47	SH1G5	SHZ/2/G5	166	SR300GR	SFR.6/GR	44
SB420	SCB.10/CD	47	SH1G6	SHZ/2/G6	166	SR301	SFR.6/PT	137
SB420GR	SCB.10/CD/GR	47	SH1G7	SHZ/2/G7	166	SR400	SFR.6 (EX)I	33
SC100	SCX.10	106	SH1G8	SHZ/2/G8	166	SR400	SFR.6 (EX)I	44
SC101	SCX/PT	137	SH1G9	SHZ/2/G9	166	SR401	SFR.6/PT(EX)I	137
SC103	SCX/PO/2	168	SH1GG	SHZ/2/GG	166	SR500	SFR.6/M	32
SC104	SCX/PO/4	168	SH1HH	SHZ/2/HH	166	SR500	SFR.6/M	43
SC105	SCX/CPM	168	SH1II	SHZ/2/II	166	SR500GR	SFR.6/M/GR	32
SC110	SCX.10/DD	106	SH1JJ	SHZ/2/JJ	166	SR500GR	SFR.6/M/GR	43
SC120	SCX.10-CD	107	SH1KK	SHZ/2/KK	166	SR600	SFR.6/M (EX)I	32
SC200	SCX.10-PI	107	SH1LL	SHZ/2/LL	166	SR600	SFR.6/M (EX)I	43
SC210	SCX.10/O-DD	106	SH1MM	SHZ/2/MM	166	SV100	SV.2	103
SC220	SCX.10/O-CD	107	SH1NN	SHZ/2/NN	166	SV101	SV/2/PT	137
SC230	SCX.10/PI/CD	107	SH1OO	SHZ/2/OO	166	SV200	SV.4	103
SC240	SCX.10/PI/DD	107	SH1PP	SHZ/2/PP	166	SV201	SV/4/PT	137
SC400	SCX.10/O	106	SH1QQ	SHZ/2/QQ	166	SV300	SV.6	104
SC500	SCX.10/O/PI	107	SH1RR	SHZ/2/RR	166	SV301	SV/6/PT	137
SD200	SDN/D	124	SH1SS	SHZ/2/SS	166	SV400	SV.10	104
SD300	SDN/H	124	SH1TT	SHZ/2/TT	166	SV401	SV/10/PT	137
SF400	SFO.4	32	SH1UU	SHZ/2/UU	166	SWMP2	SWMP2.0	162
SF400	SFO.4	43	SH1VV	SHZ/2/VV	166	<b>T</b> SWSR1	SWSR1.0	160
SF401	SFO/PT	137	SH1WW	SHZ/2/WW	166	TA001	TAI/6	159
SF410	SFO.4/VS	33	SH1XX	SHZ/2/XX	166	TA002	TAI/12	159
SF410	SFO.4/VS	43	SH1YY	SHZ/2/YY	166	TC110	TC/DIN	112
SF512	CIL/12	155	SH1ZZ	SHZ/2/ZZ	166	TC210	TC/DIN (EX)I	112
SF515	CIL/115	155	SH419	SHZ/1/19	166	TC500	TC/PO	59
SF523	CIL/230	155	SH4AA	SHZ/1/AA	166	TC510	TC/PO (EX)I	59
SF524	CIL/24	155	SH4BB	SHZ/1/BB	166	TE110	TE.6/D	24
SF548	CIL/48	155	SH4CC	SHZ/1/CC	166	TE120	TEC.6/D	8
SF600	SFO.4 (EX)I	32	SH4DD	SHZ/1/DD	166	TE210	TE.16/D	25
SF600	SFO.4 (EX)I	43	SH4EE	SHZ/1/EE	166	TE220	TEC.16/D	8
SF601	SFO/PT(EX)I	137	SH4FF	SHZ/1/FF	166	TE310	TE.50/D	25
<b>T</b> SF701	SFR/PT	137	SH4G1	SHZ/1/G1	166	TE320	TEC.35/D	9
SF801	SFR/PT(EX)I	137	SH4G2	SHZ/1/G2	166	TE400	TED.4	24
SF812	SFO.4/C12	39	SH4G3	SHZ/1/G3	166	TE500	TE.10/D	24
SF815	SFO.4/C115	39	SH4G4	SHZ/1/G4	166	TE510	TEC.10/D	8
SF823	SFO.4/C230	39	SH4G5	SHZ/1/G5	166	TE820	TEC.70/D	9
SF824	SFO.4/C24	39	SH4G6	SHZ/1/G6	166	TL100	TLS.2	30
SF848	SFO.4/C48	39	SH4G7	SHZ/1/G7	166	TL100GR	TLS.2/GR	30
SF850	SFR.4 (EX)I	32	SH4G8	SHZ/1/G8	166	TL101	TLS/PT	137
SF850	SFR.4 (EX)I	42	SH4G9	SHZ/1/G9	166	TL110	TLS.2/U	30
SF900	SFR.4	32	SH4GG	SHZ/1/GG	166	TL120	TLS.2/T	30
SF900	SFR.4	42	SH4HH	SHZ/1/HH	166	TL200	TLD.2	31
SF900	SFR.4	48	SH4II	SHZ/1/II	166	TL200GR	TLD.2/GR	31
SF900GR	SFR.4/GR	32	SH4JJ	SHZ/1/JJ	166	TL201	TLD/PT	137
SF900GR	SFR.4/GR	42	SH4KK	SHZ/1/KK	166	TL300	TLD.2 (EX)I	31
SF900GR	SFR.4/GR	48	SH4LL	SHZ/1/LL	166	TL301	TLD/PT(EX)I	137
SF901	SFR.4/D1A	49	SH4MM	SHZ/1/MM	166	TL400	TLE.2	31
SF903	SFR.4/D3A	49	SH4NN	SHZ/1/NN	166	TL400GR	TLE.2/GR	31
SF910	SFR.4/VS	33	SH4OO	SHZ/1/OO	166	TL500	TDE.2	31
SF910	SFR.4/VS	42	SH4PP	SHZ/1/PP	166	TL500GR	TDE.2/GR	31

## Index by Catalogue number

CAT. NO.	TYPE	PAGE	CAT. NO.	TYPE	PAGE
TO110	TE.6/O	24	VP908	VPC/F08	60
TO120	TEC.6/O	8	VP909	VPC/F09	60
TO210	TE.16/O	25	VP910	VPC/F10	60
TO220	TEC.16/O	8	VP911	VPC/F11	60
TO310	TE.50/O	25	VP912	VPC/F12	60
TO320	TEC.35/O	9	VP913	VPC/F13	60
TO430	TEO.4	23	VP914	VPC/F14	60
TO431	TEO.4/PT	137	VP915	VPC/F15	60
TO500	TE.10/O	24	VP916	VPC/F16	60
TO510	TEC.10/O	8	W WP30002	WP5-14	170
TO810	TEC.70/O	9	WP30005	WP75-14	170
TO901	TEO.2/PT	137	WP30009	WP1-14	170
TO910	TEO.2	23	WP30013	WP15-14	170
TP100	TPL.4	67	WP30016	WP25-14	170
TP200	TPL.4/PS	68	WP30019	WP40-16	170
TP210	TPL.4/PS/A	68	WP30022	WP60-20	170
TP220	TPL.4/PS/B	68	WP30024	WP100-21	170
TQM02	TQM/02	159	WP30026	WP160-22	170
TQM04	TQM/04	159	WP30028	WP250-29	170
TQM12	TQM/12	159	WP30030	WP350-30	170
TQM13	TQM/13	159	WP30032	WP500-40	170
TQM14	TQM/14	159	WP90001	WPD05/15	170
TQM15	TQM/15	159	WP90002	WPD75/15	170
TR110	TR.2	65	WP90003	WPD01/15	170
TR111	TR.2/PT	137	WP90004	WPD15/16	170
TR200	TR.4	65	WP90005	WPD25/18	170
TSA03	TSA/3	170	Z WP90006	WPD04/23	170
TSA06	TSA/6	170	Z121017	ACI121017	139
TSA10	TSA/10	170	Z121019	ACI121019	139
TSA12	TSA/12	170	Z121026	ACI121026	144
TT300	TTN.35	25	Z121116	ACI121116	141
TTM12	TTM/12	159	Z121118	ACI121118	144
TUM05	TUM/05	159	Z121119	ACI121119	144
TUM06	TUM/06	159	Z121121	ACI121121	144
TUM07	TUM/07	159	Z121123	ACI121123	144
TUM08	TUM/08	159	Z121211	ACI121211	144
U TUM16	TUM/16	159	Z121212	ACI121212	144
UMCT3127	UMPU02510	169	Z121213	ACI121213	143
UMCT3128	UMPI4060	169	Z121214	ACI121214	143
UMCT3129	UMPI1525	169	Z121215	ACI121215	143
UMCT3149	UMCT	169	Z121216	ACI121216	143
UMCT3153	UMPU1625	169	Z121217	ACI121217	143
V UMCT3154	UMPU3550	169	Z121218	ACI121218	143
VL103	CO/5	168	Z121219	ACI121219	143
VL200	VLM.10	110	Z121221	ACI121221	144
VL201	VLM/PT	137	Z121228	ACI121228	141
VL300	VL.16	110	Z121301	ACI121301	141
VL400	VLM.10/O	110	Z121307	ACI121307	144
VL500	VL.16/O	111	Z121311	ACI121311	141
VL510	VL.16/O-R	111	Z121314	ACI121314	141
VL520	VL.16/O-M	111	Z121316	ACI121316	142
VP101	VPC/PT	60	Z121317	ACI121317	142
VP101	VPC/PT	137	Z121318	ACI121318	142
VP102	VPC/VT	60	Z121319	ACI121319	142
VP201	VPC/PT(EX)I	137	Z121410	ACI121410	142
VP300	VPC.2	60	Z121415	ACI121415	141
VP300GR	VPC.2/GR	60	Z121421	ACI121421	144
VP303	VPC/PTF	60			
VP310	VPC.2 (EX)I	60			
VP320	VPC.2/GV	60			
VP400	VPC.2 (EX)I/D	60			
VP500	VPD.2	61			
VP500GR	VPD.2/GR	61			
VP501	VPD/PT	137			
VP560	VPD.2 (EX)I	61			
VP561	VPD/PT(EX)I	137			
VP902	VPC/F02	60			
VP903	VPC/F03	60			
VP904	VPC/F04	60			
VP905	VPC/F05	60			
VP906	VPC/F06	60			
VP907	VPC/F07	60			



